





Customer No.: TRULY

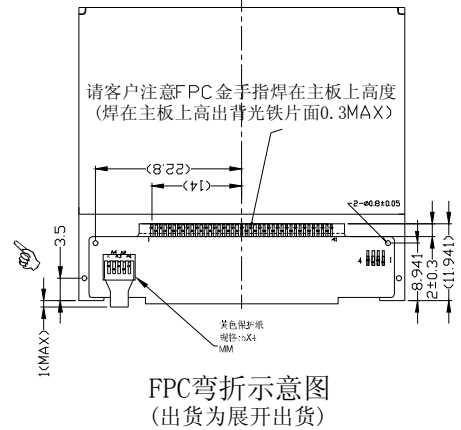


pin No.	Name
1	LEDK
2	LEDA4
3	LEDA3
4	LEDA2
5	LEDA1
6	PROTECTIX
7	RESET
8	DB15
9	DB14
10	DB13
11	DB12
12	DB11
13	DB10
14	DB9
15	DB8
16	DB7
17	DB6
18	DB5
19	DB4
20	DB3
21	DB2
22	DB1
23	DB0
24	W16_8X
25	RD
26	WR
27	DC
28	CS
29	TE
30	SDI
31	SDO
32	SCS
33	SCL
34	IDVCC
35	VCC
36	VCI
37	GND
38	XR
39	YD
40	XL
41	YU

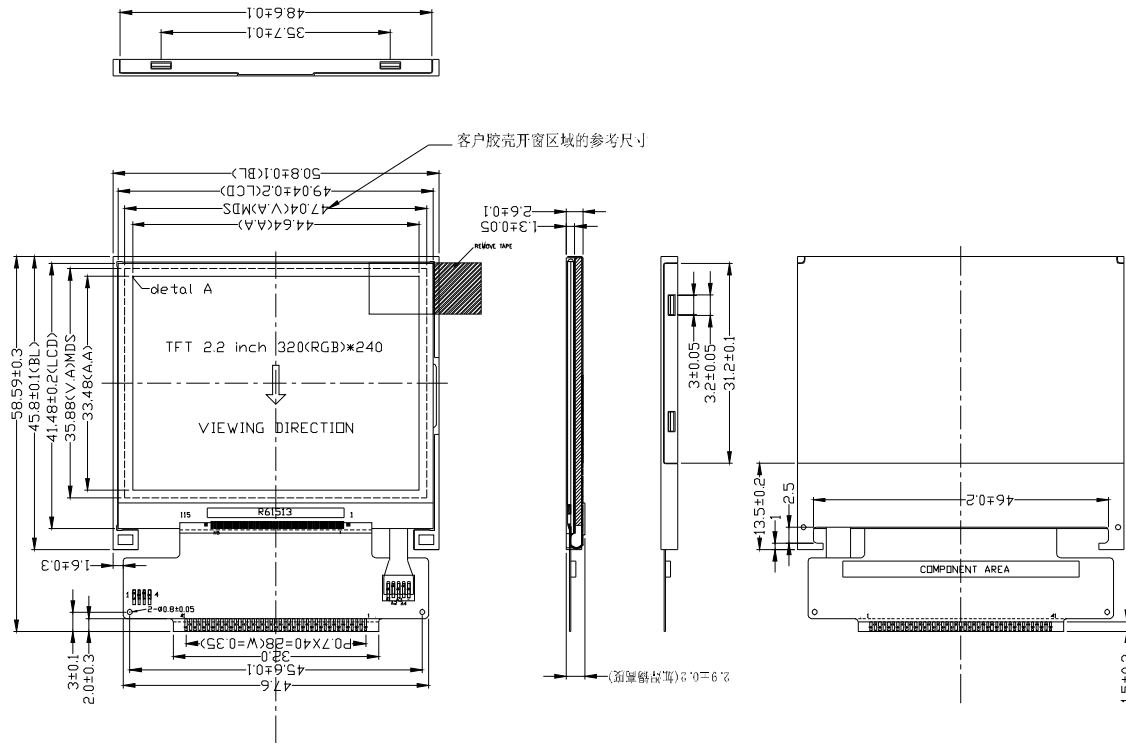

T/P CON

1	YU
2	XL
3	YD
4	XR



- NOTES:
- DISPLAY TYPE:
Main LCD: 16M Color LCD
 - OPERATING TEMP: -20°C~70°C
 - STORAGE TEMP: -30°C~80°C
 - MAIN LCD DRIVER: R61513
 - BACKLIGHT: 4CHIP-WHITE LED

CUSTOMER APPROVE		AMEND		S-IPS液晶显示模块 MULTI-INNO TECHNOLOGY CO.,LTD_		
Mechanical	Electrical	△		PRODUCT NO.	DRAW NO.	REV
		△		MI0220GT A		
		△		DWN	DSN	
		△		CHKD	APPD	
		NO.		CONTENT	DATE	