


OUTLINE DIMENSIONS

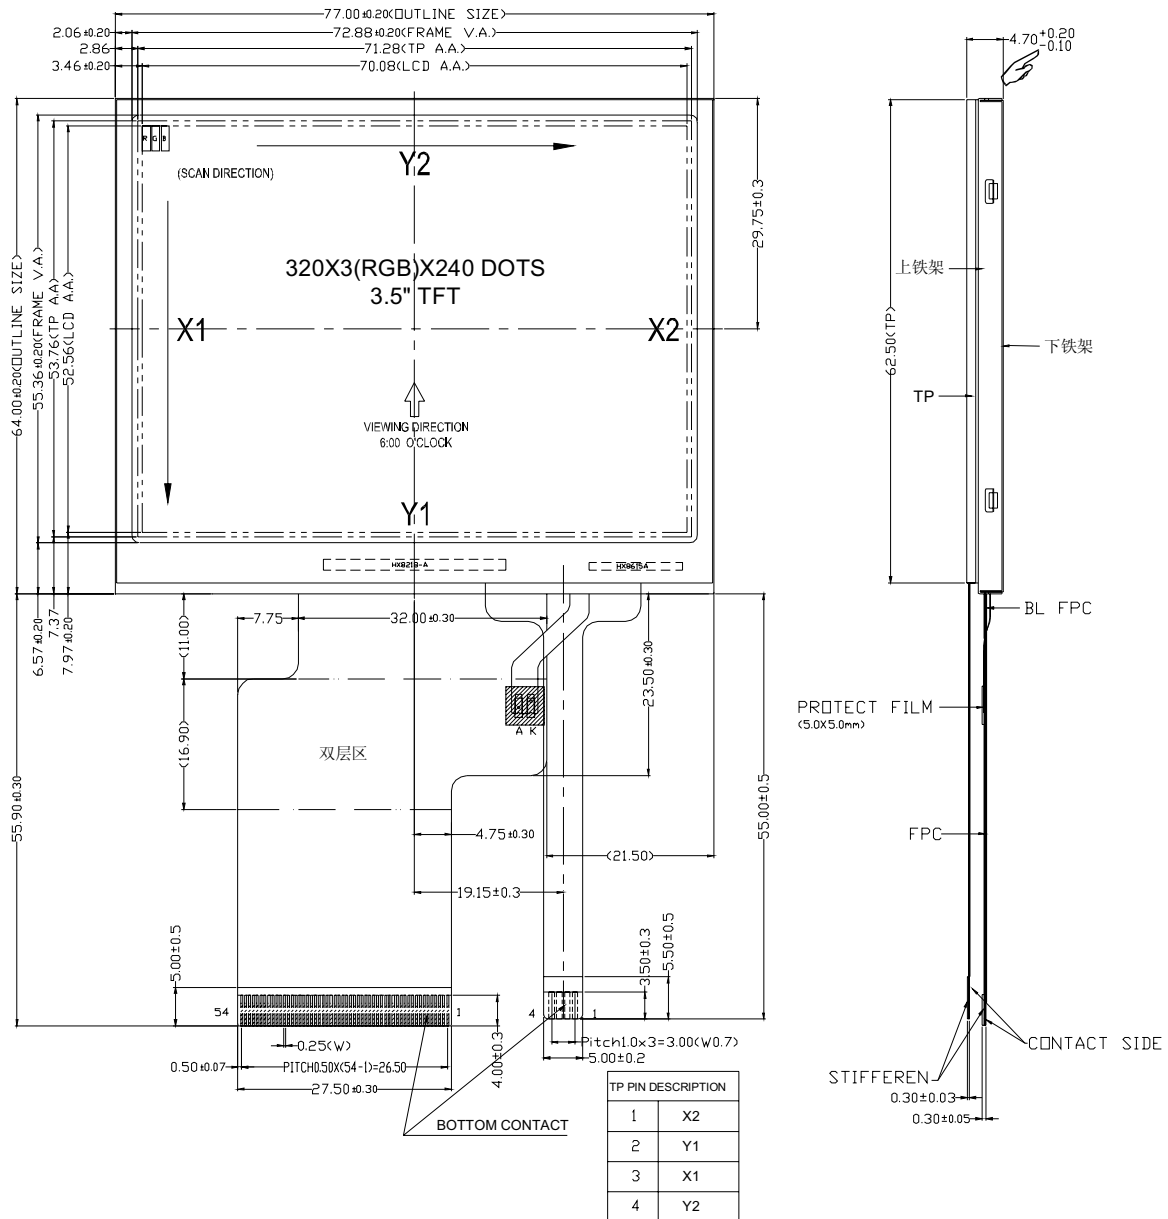

NOTES:

- DISPLAY TYPE:
Main LCD: Transmissive/Micro Reflective
- OPERATING TEMP: -20°C~70°C
- STORAGE TEMP: -30°C~80°C
- MAIN LCD DRIVER: HX8218-A/HX8615A
- ROHS COMPLIANT

Signal interface

Digital interface

Display Mode

Transmitting Type

Viewing direction

Wide viewing angle

Module area (W×H×T)

77.00mm × 64.00mm × 4.7mm

Active area (W×H)

70.08mm × 52.56mm

Dot pitch (W×H)

0.073mm × 0.219mm

Color filter array

Stripes

Backlight

LED

■ BLOCK DIAGRAM

No.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
Symbol	LEDK	LEDK	LEDA	LEDA	NC	NC	M	RESET	CS	SCL	SDI	DATA0	DATA1	DATA2	DATA3
No.	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
Symbol	DATA4	DATA5	DATA6	DATA7	DATA8	DATA9	DATA10	DATA11	DATA12	DATA13	DATA14	DATA15	DATA16	DATA17	DATA18
No.	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45
Symbol	DATA19	DATA20	DATA21	DATA22	DATA23	HSYNC	VSYNC	DOTCLK	AVDD	AVDD	VDD	VDD	NC	VGL	VGL
No.	46	47	48	49	50	51	52	53	54						
Symbol	NC	VGH	NC	NC	VCOM	VCOM	ENABLE	GND	GND						

