


LIS3LV02DQ three-axis digital accelerometer

Low-power, low-voltage digital accelerometer

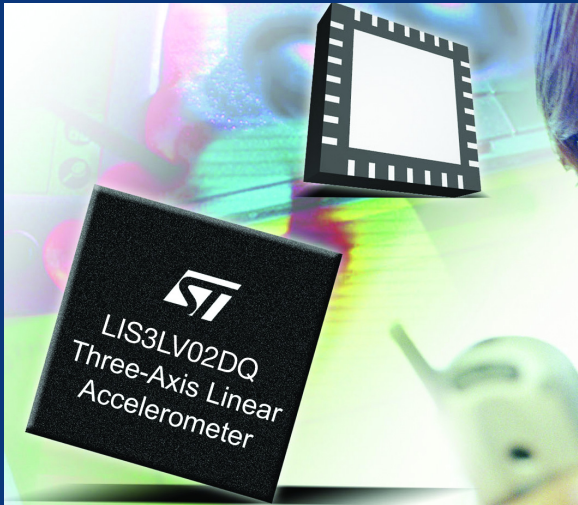

Based on MEMS micromachining technology, **STMicroelectronics'** LIS3LV02DQ is a low-power, low-voltage linear accelerometer with an SPI/I²C interface that allows implementation of an easy and intuitive user interface. This highly-efficient device accurately measures acceleration in three axes while consuming very little power. Due to its embedded non-volatile memory, all critical device parameters are trimmed and stored during final tests to enable uniformity of production.

ST MEMS accelerometers provide high-sensitivity and precision, delivering resolutions in the sub-mg range. Board mounting and assembly is simplified by having a single device with three axes of sensitivity. An embedded 12-bit A/D converter in the device is not only reducing system cost, but makes the total solution more efficient.

Applications

The combination of MEMS accelerometers and an appropriate software application eliminates the need for conventional switches, buttons and thumbwheels to interact with functions of handheld devices. It is an effective way to solve the familiar “small button – big finger” problem experienced by many users. Acting as a tilt/motion sensor, MEMS accelerometers can detect hand movements and use them as inputs for an easy and intuitive man machine user interface. The approach is ideal for applications such as:

- Scrolling of documents, maps and images larger than the display window
- Web page browsing
- Menu navigation
- Gaming
- Context awareness
- Automatic portrait-landscape adaption
- Pedometer
- System wake-up
- Motion control

In addition to user interfaces, the use of a MEMS sensor allows ‘compass compensation’ in handheld devices. The accelerometer compensates the inclination of the device, enabling an accurate and reliable reading.


MEMS accelerometers also allow the implementation of some important safety features in portable devices, including free-fall detection, to protect the integrity of hard disk drive data, and shock detection. The quick response of the sensor allows initiation of actions to protect the portable device, long before the mechanical overload can create a damage to the system.

The LIS3LV02DQ has a digital, programmable interrupt output to operate as a smart sensor and can activate external devices if user defined acceleration thresholds are exceeded.

Hardware features:

The LIS3LV02DQ three-axis linear digital accelerometer includes a MEMS sensor chip that changes capacitance in response to movement or inclination. In the same package there is a trimmed interface with an embedded A/D converter that translates this capacitance change into a digital word which can be read by the serial interface.

- Three-axis accelerometer in a single device
- No external components required
- I²C or SPI digital serial interface
- Embedded 12-bit A/D conversion
- Programmable bandwidth and data rate
- Wake-up interrupt generation for system power save feature
- QFN28 plastic package with 0.8mm pitch
- -40 to 85°C operating temperature range
- 2.16 to 3.6V core power supply
- 1.7 to 3.6V I/O power supply
- 0.7mA typical current consumption in normal mode
- 1µA typical current consumption in power-down mode
- Programmable digital low-pass filter
- ±2g and ±6g full scale range, user selectable
- Resolution 1mg @ 50Hz
- Non-linearity 2% for X and Y and 3% for Z axis
- Shock tolerance up to 10000g for 0.1ms
- Embedded self-test function
- Eco-pack compliant package

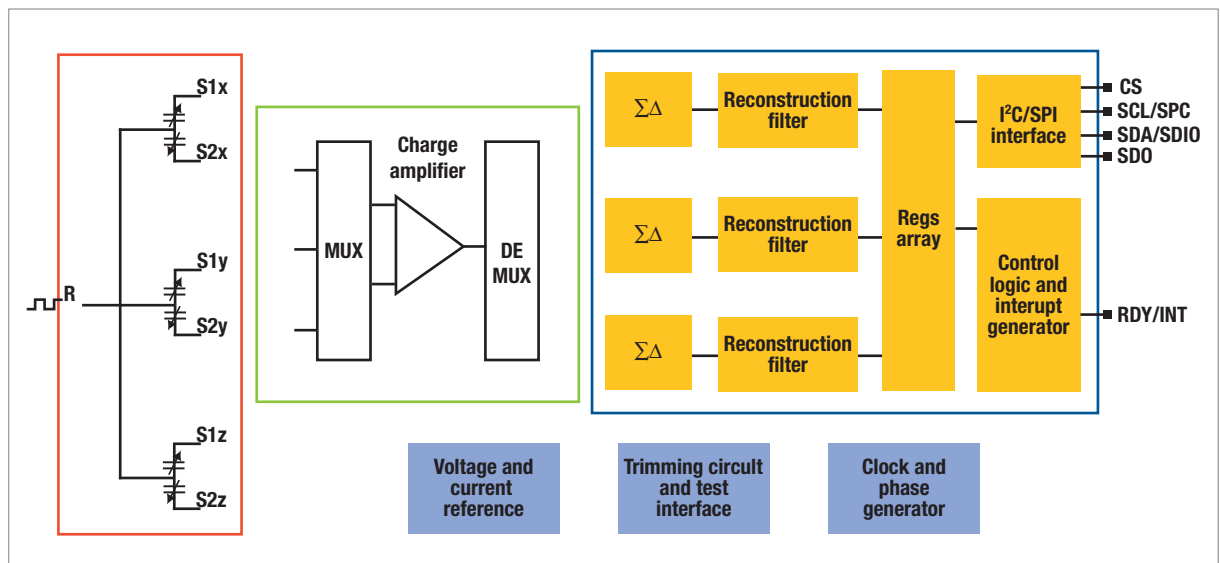

The LIS3LV02DQ three-axis linear digital accelerometer includes a MEMS sensor chip that changes capacitance in response to movement or inclination. In the same package there is a trimmed interface with an embedded 12-bit A/D converter that translates this capacitance change into a digital word which can be read by serial interface.



© STMicroelectronics - November 2005 - Printed in Italy - All rights reserved

The STMicroelectronics corporate logo is a registered trademark of the STMicroelectronics group of companies. All other names are the property of their respective owners. ARM Powered is a registered trademark of ARM Limited.

For selected STMicroelectronics sales offices fax:

France +33 1 55489569; Germany +49 89 4605454; Italy +39 02 8250449; Japan +81 3 57838216; Singapore +65 6481 5124; Sweden +46 8 58774411; Switzerland +41 22 9292900; United Kingdom and Eire +44 1628 890391; USA +1 781 861 2678

Full product information at www.st.com