



Dual Fibre Channel Transformers for 75 Ohm Coaxial & 150 Ohm STP Cable

Features

- Complies with ANSI X3T9.5, FC-0 over 133, 266 and 531 Mbps data rates for up to 100 meters on coaxial and STP cable
- Fast rise time
- Low profile, light weight SMD packages for pick and place compatibility while providing consistent and reliable coplanarity
- Excellent quality at extremely competitive price due to high volume production
- Manufactured in ISO-9001 approved Talema facility



Electrical Specifications

Ratings @ 25°C ambient

Minimum Isolation Voltage: 2000Vrms

Operating Temperature Range: 0 to +85°C

Storage Temperature: -25°C to +125°C

Inductance measured at 100kHz, 20mVrms


Standard Packaging: Tape & Reel

Dual Fibre Channel Transformers



Part Number	OCL (µH Min.)	Turns ratio ±5%	R _{CU} P (mOhms)	C _{VW} (pF Max)	Rise Time (ns Max) 20-80%	L _L sec (µH Max)	V _P (Vrms)
FCJ-7.5	7.5	1 : 1	200	5.0	0.5	0.10	2000
FCJ-15	15	1 : 1	200	5.0	0.8	0.10	2000
FCJ-30	30	1 : 1	200	5.0	1.6	0.10	2000
FCJ-60	60	1 : 1	200	5.5	2.0	0.10	2000

Dimensions & Schematics

Package

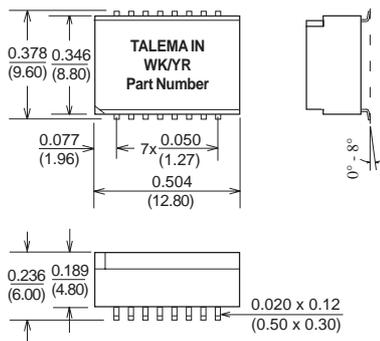

Suggested Pad Layout



Sales & Marketing, Design and Manufacturing Facilities

<http://www.talema-nuvotem.com>

Eastern Europe & Czech Republic

NT MAGNETICS s.r.o.
Chebská 27
322 00 Plzeň
Tel: Int. + 420 37 - 744 9303
Fax: Int. + 420 37 - 744 3697
Email: talema@talema.cz

Germany

TALEMA ELEKTRONIK GMBH
Sembdnerstr. 5, Postfach 2523
82110 Germering
Tel: Int. + 49 89 - 841 00 - 0
Fax: Int. + 49 89 - 841 00 25
Email: info@talema.de

Ireland

NUVOTEM TEO.
Crollý
Co. Donegal
Tel: Int. + 353 74 - 954 8666
Fax: Int. + 353 74 - 954 8139
Email: info@nuvotem.com

India

TALEMA ELECTRONIC PVT. LTD.
Opposite the SIDCO Industrial Estate
Gins Towers
4/5S.H/1, Omalur Main Road
Salem - 636 004, Tamil Nadu
Tel: Int. + 91 427 - 244 1325
Fax: Int. + 91 427 - 243 0034
E-mail: talema@talemaindia.com