



VDSL Miniature SMD Transformer

Features

- Complies with requirements of IEC60950, EN60950, UL60950/ CSA60950 and AS/NZS60950
- Low profile, light weight SMD packages for pick and place compatibility while providing consistent and reliable coplanarity
- Excellent quality at extremely competitive price due to high volume production
- Manufactured in ISO-9001 approved Talema facility

Electrical Specifications

Ratings @ 25°C ambient

Minimum Isolation Voltage: 1500Vrms for 1 minute

Operating Temperature Range: -40° to +85°C

Storage Temperature: -25°C to +125°C

Supplementary insulation for a primary circuit at 250Vrms working voltage



Inductance & Leakage measured at 100kHz, 10mV_{AC}

Standard Packaging: Tape & Reel


Weight: 2.5 g

VDSL Transformer


Part Number	OCL (μ H Min.)	Pins	Turns ratio $\pm 2\%$	DCR (mOhms) Max.	Line Impedance	Leakage Inductance	V _P (Vrms)
82312	95 μ H 430 μ H 125 μ H 95 μ H	16-14 11-9 3-1 6-8	(16-14):(1-3):(15-13) = 9:10:10 (11-9):(6-8):(10-12) = 19:9:9	350	100 ohms	0.2 μ H max., 16-14 (s.c.15+1, 3+13) 0.8 μ H max., 11-9 (s.c.12+8, 6+10)	1500

Dimensions & Schematics


Package

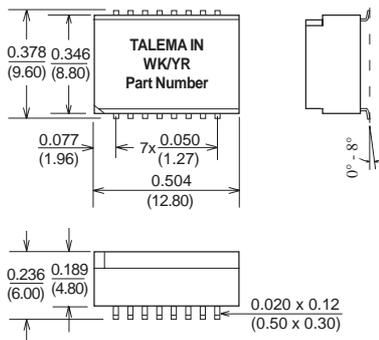

Suggested Pad Layout



Schematic

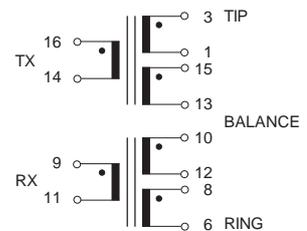

Sales & Marketing, Design and Manufacturing Facilities

<http://www.talema-nuvotem.com>

Eastern Europe & Czech Republic

NT MAGNETICS s.r.o.
Chebská 27
322 00 Plzeň
Tel: Int. + 420 37 - 744 9303
Fax: Int. + 420 37 - 744 3697
Email: talema@talema.cz

Germany

TALEMA ELEKTRONIK GMBH
Sembdnerstr. 5, Postfach 2523
82110 Germering
Tel: Int. + 49 89 - 841 00 - 0
Fax: Int. + 49 89 - 841 00 25
Email: info@talema.de

Ireland

NUVOTEM TEO.
Crolly
Co. Donegal
Tel: Int. + 353 74 - 954 8666
Fax: Int. + 353 74 - 954 8139
Email: info@nuvotem.com

India

TALEMA ELECTRONIC PVT. LTD.
Opposite the SIDCO Industrial Estate
Gins Towers
4/5S.H/1, Omalur Main Road
Salem - 636 004, Tamil Nadu
Tel: Int. + 91 427 - 244 1325
Fax: Int. + 91 427 - 243 0034
E-mail: talema@talemaindia.com