

## POWER SCHOTTKY RECTIFIER

### MAIN PRODUCT CHARACTERISTICS


$I_{F(AV)}$	1 A
$V_{RRM}$	60 V
$T_j(max)$	150°C
$V_F(max)$	0.56 V

### FEATURES AND BENEFITS

- NEGLIGIBLE SWITCHING LOSSES
- LOW FORWARD VOLTAGE DROP

### DESCRIPTION

Axial and Surface Mount Power Schottky rectifier suited for Switch Mode Power Supplies and high frequency DC to DC converters. Packaged in DO-41 and SMA, this device is intended for use in low voltage, high frequency inverters and small battery chargers.

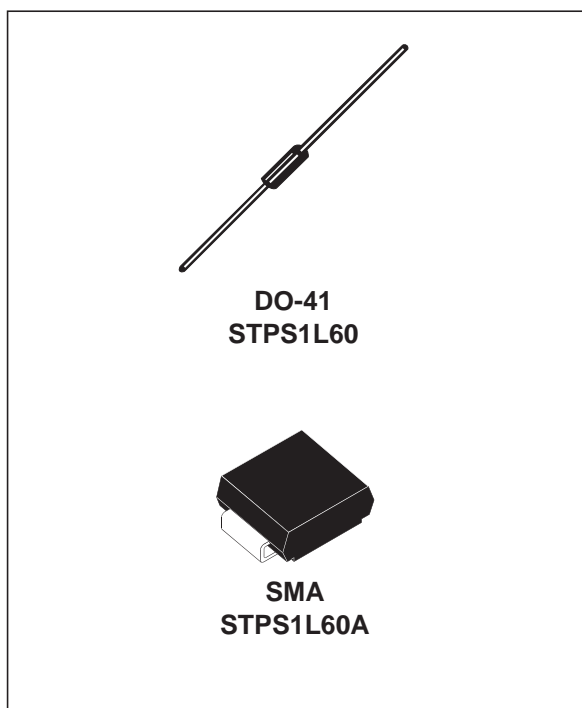

### ABSOLUTE RATINGS (limiting values)

Symbol	Parameter		Value	Unit
$V_{RRM}$	Repetitive peak reverse voltage		60	V
$I_{F(RMS)}$	RMS forward current		10	A
$I_{F(AV)}$	Average forward current	$T_L = 130^\circ\text{C} \quad \delta = 0.5$ SMA	1	A
		$T_L = 120^\circ\text{C} \quad \delta = 0.5$ DO-41		
$I_{FSM}$	Surge non repetitive forward current	$t_p = 10 \text{ ms}$ Sinusoidal	40	A
$T_{stg}$	Storage temperature range		- 65 to + 150	°C
$T_j$	Maximum junction temperature *		150	°C
$dV/dt$	Critical rate of rise of reverse voltage		10000	V/ $\mu\text{s}$

\* :  $\frac{dP_{tot}}{dT_j} < \frac{1}{R_{th(j-a)}}$  thermal runaway condition for a diode on its own heatsink

# STPS1L60/A

## THERMAL RESISTANCES

Symbol	Parameter		Value	Unit	
$R_{th(j-a)}$	Junction to ambient	Lead length = 10 mm	DO-41	100	°C/W
			SMA	120	
$R_{th(j-l)}$	Junction to leads	Lead length = 10 mm	DO-41	45	
			SMA	30	

## STATIC ELECTRICAL CHARACTERISTICS


Symbol	Parameter	Tests conditions		Min.	Typ.	Max.	Unit
$I_R^*$	Reverse leakage current	$T_j = 25^\circ\text{C}$	$V_R = 60\text{V}$			50	$\mu\text{A}$
		$T_j = 100^\circ\text{C}$			1.5	5	mA
$V_F^*$	Forward voltage drop	$T_j = 25^\circ\text{C}$	$I_F = 1\text{A}$			0.57	V
		$T_j = 100^\circ\text{C}$				0.56	
		$T_j = 125^\circ\text{C}$			0.5	0.54	
		$T_j = 25^\circ\text{C}$	$I_F = 2\text{A}$			0.75	
		$T_j = 100^\circ\text{C}$				0.68	
		$T_j = 125^\circ\text{C}$			0.6	0.66	

Pulse test : \*  $t_p = 380\ \mu\text{s}$ ,  $\delta < 2\%$


To evaluate the maximum conduction losses use the following equation:

$$P = 0.44 \times I_{F(AV)} + 0.12 \times I_{F(RMS)}^2$$


**Fig. 1:** Average forward power dissipation versus average forward current.

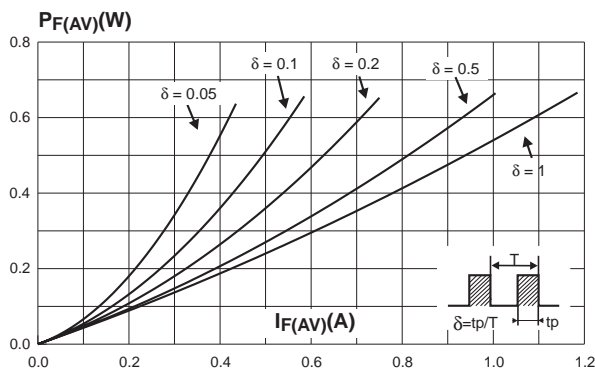


**Fig. 3-1:** Non repetitive surge peak forward current versus overload duration (maximum values) (DO-41).

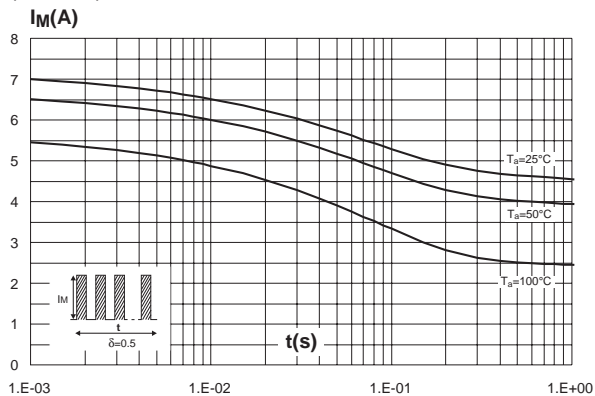


**Fig. 2:** Average forward current versus ambient temperature ( $\delta = 0.5$ ).

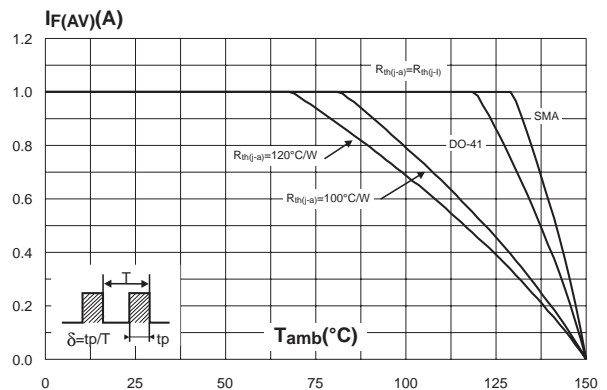


**Fig. 3-2:** Non repetitive surge peak forward current versus overload duration (maximum values) (SMA).

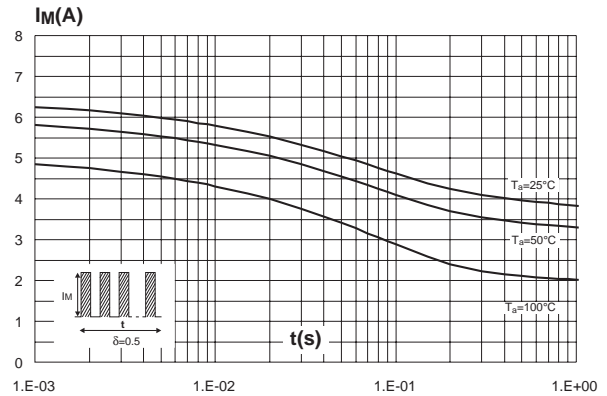


**Fig. 4-1:** Relative variation of thermal impedance junction to ambient versus pulse duration (DO-41).

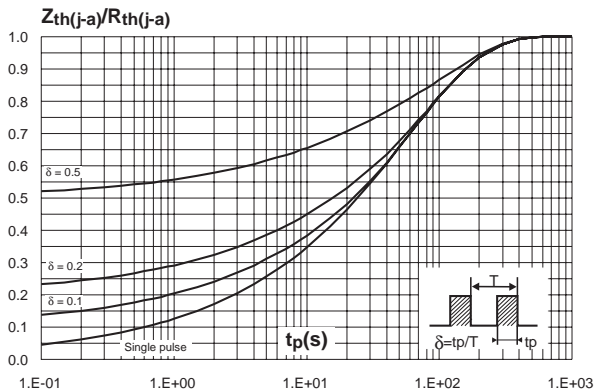


**Fig. 4-2:** Relative variation of thermal impedance junction to ambient versus pulse duration (SMA).

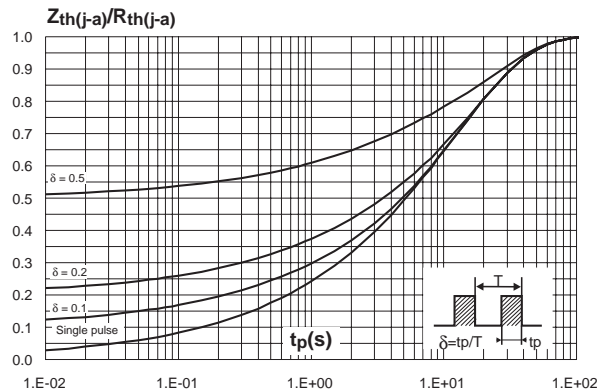


**Fig. 5:** Reverse leakage current versus reverse voltage applied (typical values).

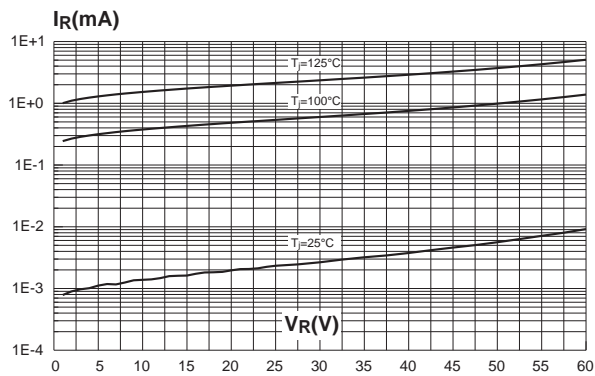


**Fig. 6:** Junction capacitance versus reverse voltage applied (typical values).

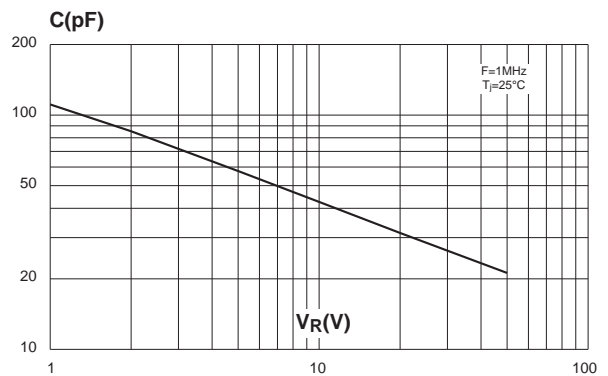

**Fig. 7-1:** Forward voltage drop versus forward current (low level, maximum values) (DO-41).

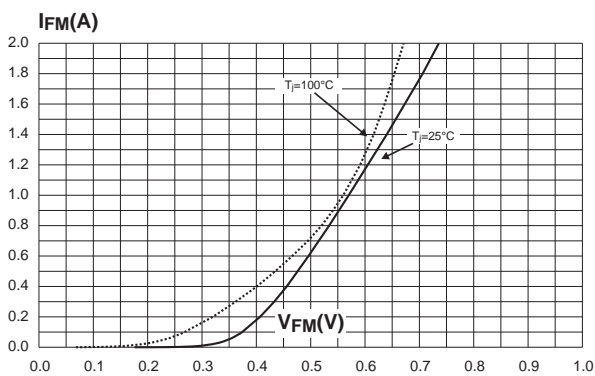


**Fig. 7-2:** Forward voltage drop versus forward current (high level, maximum values) (SMA).

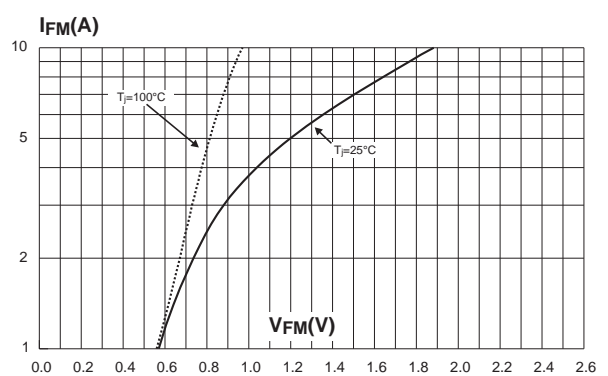


# STPS1L60/A

**Fig. 8:** Thermal resistance junction to ambient versus copper surface under each lead (Epoxy printed circuit board FR4, Cu: 35µm) (SMA).

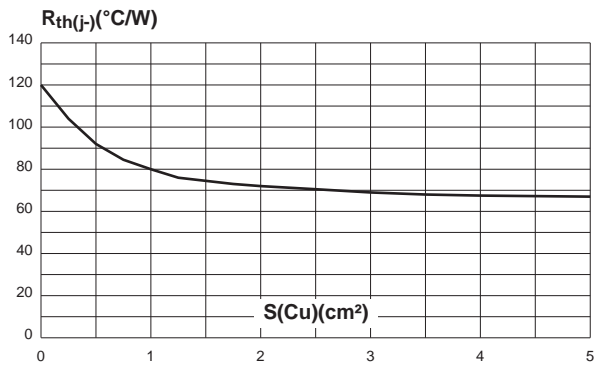

**Fig. 9:** Thermal resistance versus lead length (DO-41).

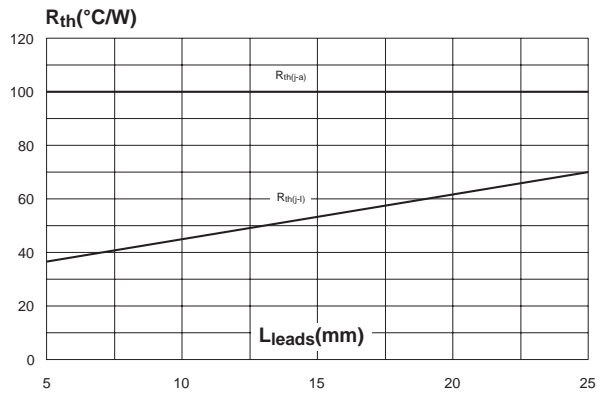


## PACKAGE MECHANICAL DATA SMA (JEDEC DO-214AC)

The figure contains three mechanical drawings of the SMA package. The top drawing is a top view showing dimensions  $E1$  (width between leads) and  $D$  (height). The middle drawing is a side view showing dimensions  $E$  (total width),  $L$  (lead length), and  $c$  (lead thickness). The bottom drawing is a perspective view showing dimensions  $A1$  (height to top of package) and  $A2$  (height to bottom of package), and  $b$  (lead width).


REF.	DIMENSIONS			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A1	1.90	2.70	0.075	0.106
A2	0.05	0.20	0.002	0.008
b	1.25	1.65	0.049	0.065
c	0.15	0.41	0.006	0.016
E	4.80	5.60	0.189	0.220
E1	3.95	4.60	0.156	0.181
D	2.25	2.95	0.089	0.116

## FOOT PRINT DIMENSIONS (in millimeters)

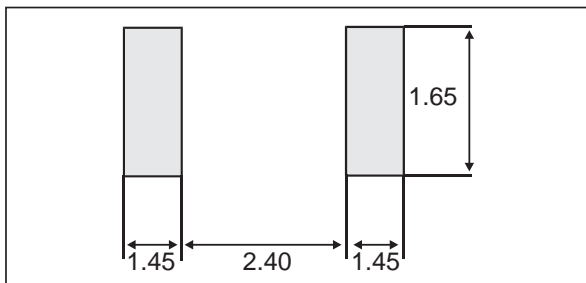

**PACKAGE MECHANICAL DATA**

DO-41 plastic

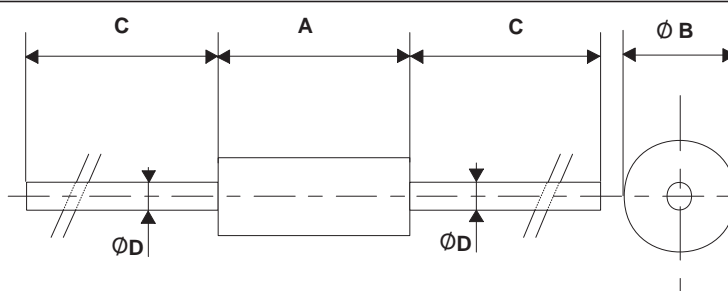

REF.	DIMENSIONS			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	4.07	5.20	0.160	0.205
B	2.04	2.71	0.080	0.107
C	28		1.102	

Ordering type	Marking	Package	Weight	Base qty	Delivery mode
STPS1L60	Partnumber cathode ring	DO-41	0.34g	2000	Ammopack
STPS1L60RL	Partnumber cathode ring	DO-41	0.34g	5000	Tape & Reel
STPS1L60A	GB6	SMA	0.068 g	5000	Tape & Reel

- Epoxy meets UL94,V0

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied.

STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics

© 2002 STMicroelectronics - Printed in Italy - All rights reserved.

STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - Canada - China - Finland - France - Germany  
 Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore  
 Spain - Sweden - Switzerland - United Kingdom - United States.

<http://www.st.com>

This datasheet has been download from:

[www.datasheetcatalog.com](http://www.datasheetcatalog.com)

Datasheets for electronics components.