

#### Is Now Part of



## ON Semiconductor®

# To learn more about ON Semiconductor, please visit our website at www.onsemi.com

Please note: As part of the Fairchild Semiconductor integration, some of the Fairchild orderable part numbers will need to change in order to meet ON Semiconductor's system requirements. Since the ON Semiconductor product management systems do not have the ability to manage part nomenclature that utilizes an underscore (\_), the underscore (\_) in the Fairchild part numbers will be changed to a dash (-). This document may contain device numbers with an underscore (\_). Please check the ON Semiconductor website to verify the updated device numbers. The most current and up-to-date ordering information can be found at <a href="www.onsemi.com">www.onsemi.com</a>. Please email any questions regarding the system integration to Fairchild <a href="guestions@onsemi.com">guestions@onsemi.com</a>.

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any EDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officer



# KA1M0680B/KA1M0680RB/ KA1H0680B/KA1H0680RFB


## Fairchild Power Switch(FPS)

#### **Features**


- · Precision fixed operating frequency
- KA1M0680B,KA1M0680RB (67KHz)
- KA1H0680B,KA1H0680RFB (100KHz)
- · Pulse by pulse over current limiting
- · Over load protection
- Over voltage protection (Min. 23V)
- Internal thermal shutdown function
- Under voltage lockout
- Internal high voltage sense FET
- Latch up mode (KA1M0680B,KA1H0680B)
- Auto restart (KA1M0680RB,KA1H0680RFB)
- · Soft start

#### **Description**

The Fairchild Power Switch(FPS) product family is specially designed for an off-line SMPS with minimal external components. The Fairchild Power Switch(FPS) consist of high voltage power SenseFET and current mode PWM controller IC. PWM controller features integrated fixed oscillator, under voltage lock out, leading edge blanking, optimized gate turn-on/turn-off driver, thermal shut down protection, over voltage protection, temperature compensated precision current sources for loop compensation and fault protection circuit. compared to discrete MOSFET and controller or RCC switching converter solution, a Fairchild Power Switch(FPS) can reduce total component count, design size, weight and at the same time increase & efficiency, productivity, and system reliability. It has a basic platform well suited for cost effective design in either a flyback converter or a forward converter.



### **Internal Block Diagram**

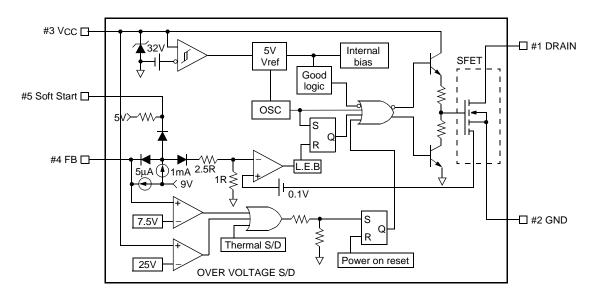

#### **Absolute Maximum Ratings**

Parameter	Symbol	Value	Unit
Maximum Drain voltage (1)	V <sub>D</sub> ,MAX	800	V
Drain Gate voltage (R <sub>GS</sub> =1MΩ)	VDGR	800	V
Gate source (GND) voltage	Vgs	±30	V
Drain current pulsed (2)	IDM	24.0	ADC
Single pulsed avalanche energy (3)	Eas	455	mJ
Avalanche current (4)	IAS	16	Α
Continuous drain current (Tc=25°C)	ID	6.0	ADC
Continuous drain current (Tc=100°C)	ID	4.0	ADC
Maximum Supply voltage	VCC,MAX	30	V
Input voltage range	VFB	-0.3 to V <sub>SD</sub>	V
Total power dissipation	PD	150	W
	Derating	1.21	W/°C
Operating ambient temperature	TA	−25 to +85	°C
Storage temperature	TSTG	-55 to +150	°C

#### Notes:

- 1. Tj=25°C to 150°C
- 2. Repetitive rating: Pulse width limited by maximum junction temperature
- 3. L=24mH, VDD=50V, RG=25 $\Omega$ , starting Tj=25 $^{\circ}$ C
- 4. L=13 $\mu$ H, starting Tj=25°C

## **Electrical Characteristics (SFET part)**

(Ta=25°C unless otherwise specified)

Parameter	Symbol	Condition	Min.	Тур.	Max.	Unit
Drain source breakdown voltage	BVDSS	Vgs=0V, ID=50μA	800	-	-	V
Zero gate voltage drain current	IDSS	V <sub>DS</sub> =Max., Rating, V <sub>GS</sub> =0V	-	-	50	μА
		V <sub>DS</sub> =0.8Max., Rating, V <sub>GS</sub> =0V, T <sub>C</sub> =125°C	-	-	200	μА
Static drain source on resistance (note)	RDS(ON)	VGS=10V, ID=4.0A	-	1.6	2.0	Ω
Forward transconductance (note)	gfs	V <sub>DS</sub> =15V, I <sub>D</sub> =4.0A	1.5	2.5	-	S
Input capacitance	Ciss	)/ O)/ )/ OF)/	-	1600	-	pF
Output capacitance	Coss	VGS=0V, VDS=25V, f=1MHz	-	140	-	
Reverse transfer capacitance	Crss	1-1141112	-	42	-	
Turn on delay time	td(on)	V <sub>DD</sub> =0.5BV <sub>DSS</sub> , I <sub>D</sub> =6.0A	-	60	-	
Rise time	tr	(MOSFET switching	-	150	-	nS
Turn off delay time	td(off)	time are essentially independent of	-	300	-	113
Fall time	tf	operating temperature)	-	130	-	
Total gate charge (gate-source+gate-drain)	Qg	V <sub>GS</sub> =10V, I <sub>D</sub> =6.0A, V <sub>DS</sub> =0.5BV <sub>DS</sub> S (MOSFET	-	70	-	
Gate source charge	Qgs	switching time are essentially independent of	-	16	-	nC
Gate drain (Miller) charge	Qgd	operating temperature)	-	27	-	

Pulse test: Pulse width  $\leq 300 \mu S$ , duty cycle  $\leq 2\%$   $S = \frac{1}{R}$ 

## **Electrical Characteristics (CONTROL part)**

(Ta=25°C unless otherwise specified)

Parameter	Symbol	Condition	Min.	Тур.	Max.	Unit	
UVLO SECTION							
Start threshold voltage	VSTART	-	14	15	16	V	
Stop threshold voltage	VSTOP	After turn on	9	10	11	V	
OSCILLATOR SECTION				l			
lettel e e e e e		<b>KA1M0680B</b> 61 6		67	73		
	Fosc	KA1M0680RB	61	67	73	- kHz	
Initial accuracy		KA1H0680B	90	100	110		
		KA1H0680RFB	90	100	110		
Frequency change with temperature (2)	ΔΕ/ΔΤ	-25°C ≤ Ta ≤ +85°C	-	±5	±10	%	
Maximum duty cycle		KA1M0680B	74	77	80		
	D	KA1M0680RB	74	77	80		
	Dmax	KA1H0680B	64	67	70	%	
		KA1H0680RFB	64	67	70	1 !	
FEEDBACK SECTION							
Feedback source current	IFB	Ta=25°C, 0V ≤ Vfb ≤ 3V	0.7	0.9	1.1	mA	
Shutdown Feedback voltage	VsD	-	6.9	7.5	8.1	V	
Shutdown delay current	Idelay	Ta=25°C, 5V ≤ Vfb ≤ VsD		5.0	6.0	μΑ	
SOFT START SECTION				•		•	
Soft Start Voltage	Vss	VFB =2V	4.7	5.0	5.3	V	
Soft Start Current	Iss	Sync & S/S=GND	8.0	1.0	1.2	mA	
REFERENCE SECTION							
Output voltage (1)	Vref	Ta=25°C	4.80	5.00	5.20	V	
Temperature Stability (1)(2)	Vref/∆T	-25°C ≤ Ta ≤ +85°C	-	0.3	0.6	mV/°C	
CURRENT LIMIT (SELF-PROTECTION	) SECTION			•		•	
Peak Current Limit	IOVER	Max. inductor current	3.52	4.00	4.48	Α	
PROTECTION SECTION							
Thermal shutdown temperature (Tj) (1)	T <sub>SD</sub>	-	140	160	-	°C	
Over voltage protection voltage	VOVP	-	23	25	28	V	
TOTAL DEVICE SECTION							
Start Up current	ISTART	VCC=14V	0.1	0.3	0.45	mA	
Operating supply current (control part only)	lop	Ta=25°C	6	12	18	mA	
V <sub>CC</sub> zener voltage	Vz	Icc=20mA	30	32.5	35	V	

#### Note:

- 1. These parameters, although guaranteed, are not 100% tested in production
- 2. These parameters, although guaranteed, are tested in EDS (wafer test) process

#### **Typical Performance Characteristics**

(These characteristic graphs are normalized at Ta=25°C)




Figure 1. Operating Frequency





Figure 2. Feedback Source Current



**Figure 3. Operating Supply Current** 




Figure 4. Peak Current Limit

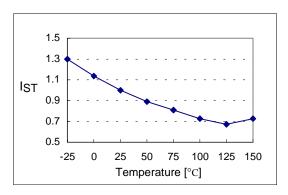


Figure 5. Start up Current




Figure 6. Start Threshold Voltage

#### **Typical Performance Characteristics (Continued)**

(These characteristic graphs are normalized at Ta=25°C)




Figure 7. Stop Threshold Voltage




Figure 8. Maximum Duty Cycle

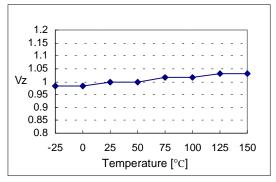


Figure 9. VCC Zener Voltage




Figure 10. Shutdown Feedback Voltage

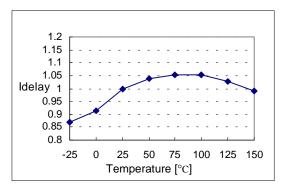


Figure 11. Shutdown Delay Current




Figure 12. Over Voltage Protection

## **Typical Performance Characteristics** (Continued)

(These characteristic grahps are normalized at Ta=25°C)




Figure 13. Soft Start Voltage







Figure 14. Static Drain-Source on Resistance

## **Package Dimensions**

## **TO-3P-5L**

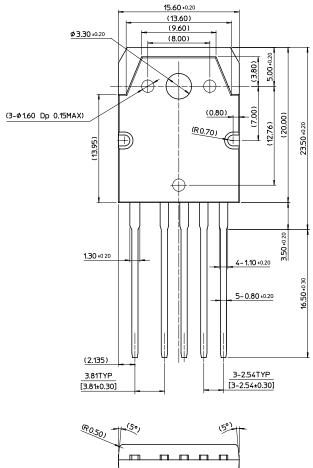


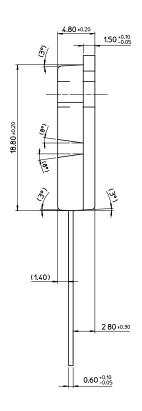





## Package Dimensions (Continued)

# TO-3P-5L (Forming)

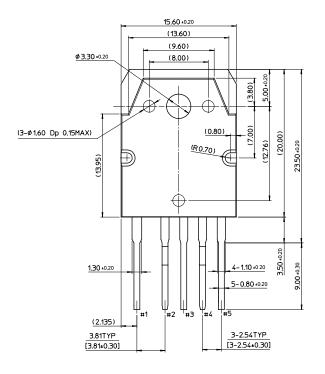


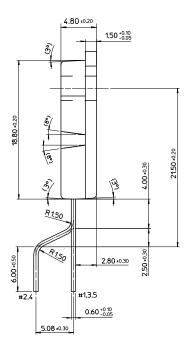




#### Package Dimensions (Continued)

## TO-3PF-5L

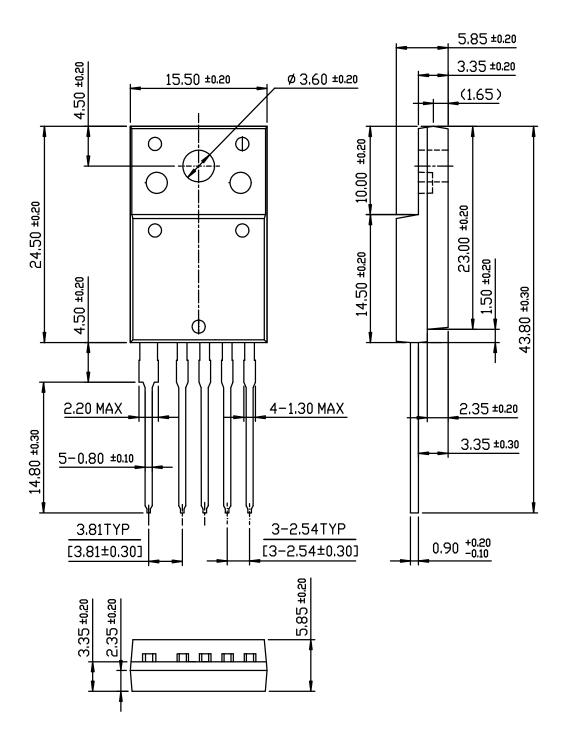

#### Package Dimensions (Continued)

## TO-3PF-5L(Forming)

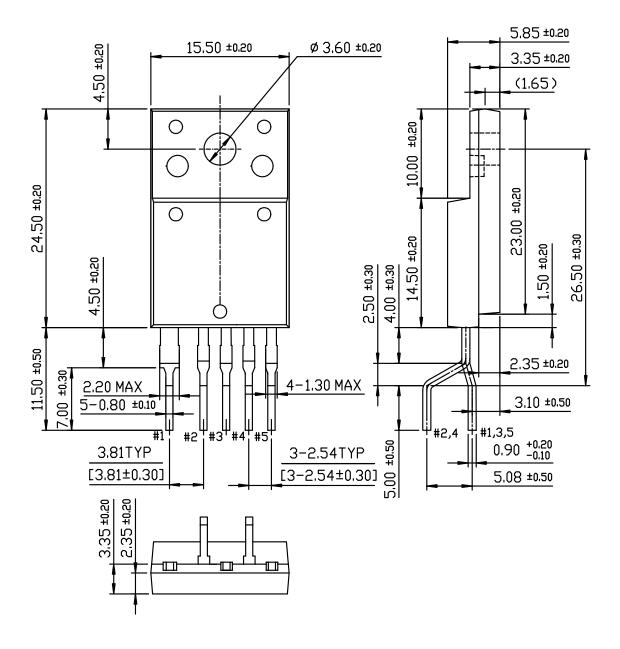

#### **Ordering Information**

Product Number	Package	Rating	Fosc	Latch/Auto	
KA1M0680B-TU	TO-3P-5L	800V, 6A	67kHz	Latab un mada	
KA1M0680B-YDTU	TO-3P-5L(Forming)	800 V, 6A	07KHZ	Latch up mode	
KA1M0680RB-TU	TO-3P-5L	800V, 6A	67kHz	Auto restart mode	
KA1M0680RB-YDTU	TO-3P-5L(Forming)	800 V, 0A	O7 KI IZ	Auto restart mode	
KA1H0680B-TU	TO-3P-5L	800V, 6A	100kHz	Latch up mode	
KA1H0680B-YDTU	TO-3P-5L(Forming)	800 V, 0A	TOOKITZ		
KA1H0680RFB-TU	TO-3PF-5L	800V, 6A	100kHz	Auto restart mode	
KA1H0680RFB-YDTU	TO-3PF-5L(Forming)	000 V, 0A	TOOKHZ	Auto restall mode	

TU: Non Forming Type YDTU: Forming Type

#### **DISCLAIMER**

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

#### **LIFE SUPPORT POLICY**

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
- A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

www.fairchildsemi.com

ON Semiconductor and in are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <a href="www.onsemi.com/site/pdt/Patent-Marking.pdf">www.onsemi.com/site/pdt/Patent-Marking.pdf</a>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and exp

#### **PUBLICATION ORDERING INFORMATION**

#### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800-282-9855 Toll Free USA/Canada
Europe, Middle East and Africa Technical Support:
Phone: 421 33 790 2910
Japan Customer Focus Center
Phone: 81-3-5817-1050

ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative