

# HA13128, HA13135

---

## 22 W Dual BTL Audio Power Amplifier

The HA13128/HA13135 provide high output power 22 W with 10 % THD at  $V_{CC} = 14.4$  V,  $R_L = 4 \Omega$ , and built-in 2ch BTL amplifiers, stand-by circuit and 4 type protectors.

HA13128/HA13135 are pin to pin with HA13127/130, 17 W output power.

### Features

- Small pop noise
- Less external component counts
- Smaller size package and easy to mount (16 pins)
- Built-in 4 type protectors (Surge protector, TSD, output to GND short protect, output to  $V_{CC}$  short protect)
- Built-in stand-by (Mute) circuit

### Ordering Information

| Type No. | Voltage gain | Package                      |
|----------|--------------|------------------------------|
| HA13128  | 50 dB        | 16 pin SIP<br>with heat sink |
| HA13135  | 40 dB        |                              |

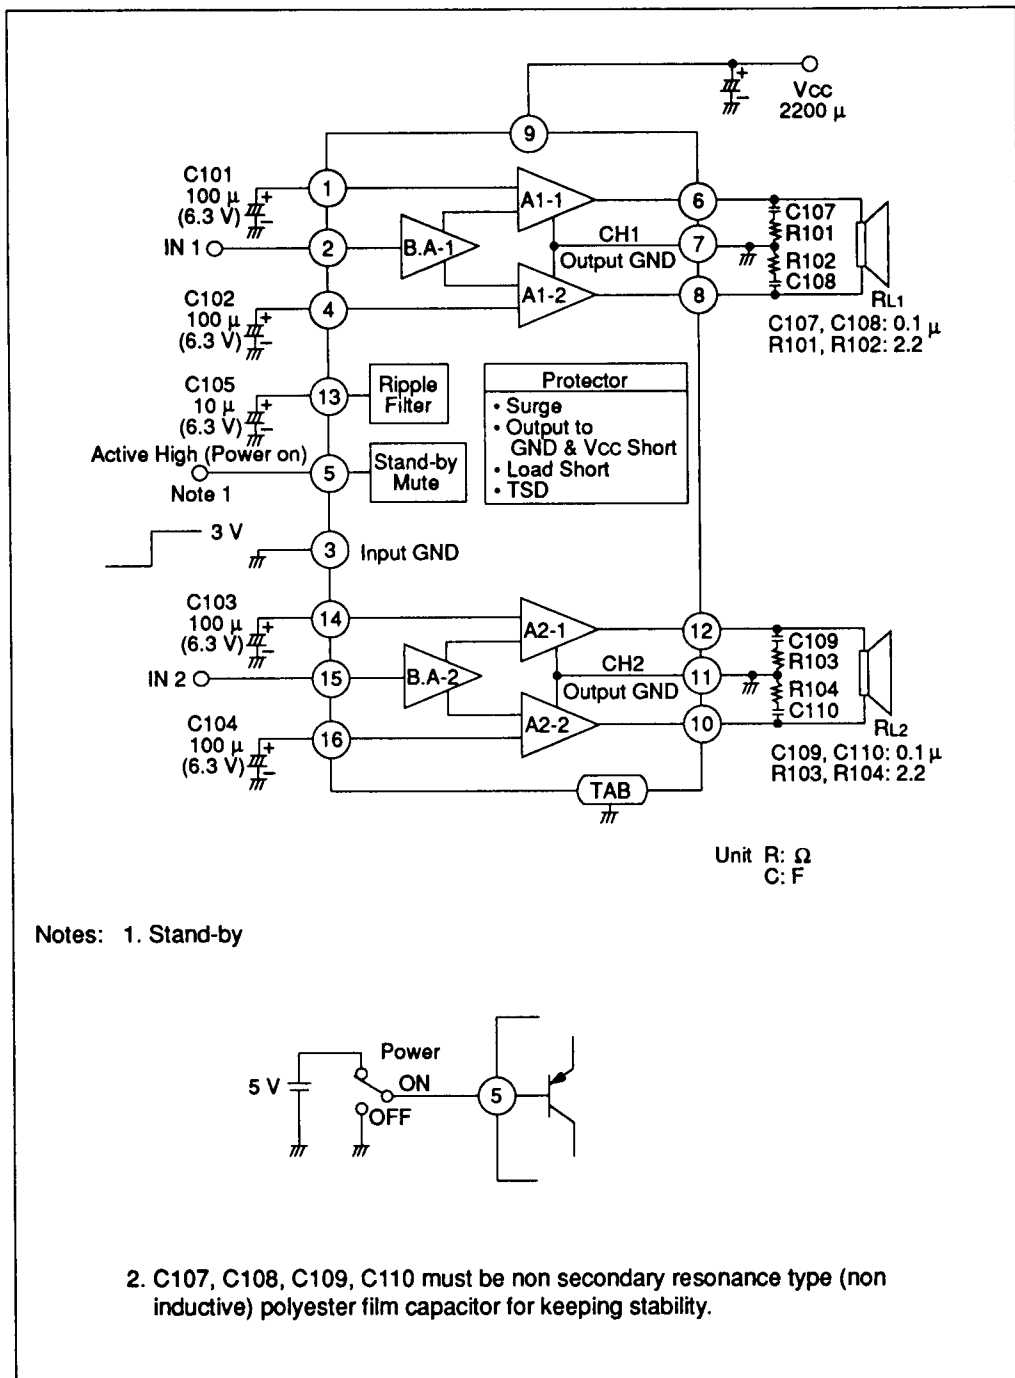


Figure 1 Block Diagram



**Absolute Maximum Ratings (Ta = 25 °C)**

| Item                     | Symbol     | Rating      | Unit | Notes |
|--------------------------|------------|-------------|------|-------|
| Operating supply voltage | Vcc        | 18          | V    |       |
| DC supply voltage        | Vcc (DC)   | 26          | V    | 1     |
| Peak supply voltage      | Vcc (peak) | 50          | V    | 2     |
| Output current           | Io (peak)  | 4           | A    | 3     |
| Power dissipation        | PT         | 25          | W    |       |
| Thermal resistance       | θj-c       | 3           | °C/W |       |
| Junction temperature     | Tj         | 150         | °C   |       |
| Operating temperature    | Topr       | -30 to +85  | °C   |       |
| Storage temperature      | Tstg       | -55 to +125 | °C   |       |

- Notes: 1. Value at t ≤ 30 sec  
 2. Value at surge pulse width ≤ 200 ms (rise time tr ≥ 1 ms)  
 3. Value at per channel

**Electrical Characteristics (Vcc = 13.2 V, f = 1 kHz, RL = 4 Ω)**

HA13128 (Gv = 50 dB) HA13135 (Gv = 40 dB)

| Item                       | Symbol | HA13128 (Gv = 50 dB) |      |      | HA13135 (Gv = 40 dB) |      |      | Unit | Test Condition   |
|----------------------------|--------|----------------------|------|------|----------------------|------|------|------|------------------|
|                            |        | Min                  | Typ  | Max  | Min                  | Typ  | Max  |      |                  |
| Quiescent current          | Iq1    | 60                   | 150  | 250  | 60                   | 150  | 250  | mA   | Vin=0 V          |
| Input bias voltage         | Vb     | —                    | 20   | 40   | —                    | 20   | 40   | mA   | Vin=0 V          |
| Output offset voltage      | ΔVo    | —                    | —    | 150  | —                    | —    | 150  | mV   | Vin=0 V          |
| Voltage gain               | Gv     | 48.5                 | 50   | 51.5 | 38.5                 | 40   | 41.5 | dB   |                  |
| Difference of voltage gain | ΔGv    | —                    | —    | 1.5  | —                    | —    | 1.5  | dB   |                  |
| Output power (1)           | Po1    | 14                   | 18   | —    | 14                   | 18   | —    | W    | THD=10 %, RL=4 Ω |
| Output power (2)           | Po2    | —                    | 13   | —    | —                    | 14   | —    | W    | THD=1 %, RL=4 Ω  |
| Total harmonic distortion  | THD    | —                    | 0.15 | 0.7  | —                    | 0.04 | 0.15 | %    | Po=3 W 1 kHz     |
|                            |        | —                    | 0.18 | —    | —                    | 0.15 | —    |      | Po=1.5 W 20 kHz  |





# HA13128, HA13135

## Electrical Characteristics ( $V_{CC} = 13.2\text{ V}$ , $f = 1\text{ kHz}$ , $R_L = 4\ \Omega$ ) (cont)


|                                   |                     |    |     |                    |    |      |                    |               |  |
|-----------------------------------|---------------------|----|-----|--------------------|----|------|--------------------|---------------|--|
| Noise Output                      | WBN <sub>1</sub>    | —  | 1.0 | 2.0                | —  | 0.35 | 0.7                | mV            | R <sub>g</sub> =10 k $\Omega$ ,<br>BW=20 Hz to 20 kHz            |
|                                   | WBN <sub>2</sub>    | —  | 0.8 | 1.7                | —  | 0.25 | 0.5                | mV            | R <sub>g</sub> =0,<br>BW=20 Hz to 20 kHz                         |
| Supply voltage ripple rejections  | SVR                 | 32 | 40  | —                  | 45 | 60   | —                  | dB            | f=500 Hz   |
| Roll-off frequency                |                     | —  | 20  | —                  | —  | 10   | —                  | Hz            | $\Delta G_v = -3\text{ dB}$ Low<br>from f=1 kHz —                |
|                                   |                     | 10 | 20  | 40                 | 30 | 70   | 140                | kHz           | High   |
| Stand-by (Mute) current           | I <sub>cc</sub>     | —  | 50  | 200                | —  | 50   | 200                | $\mu\text{A}$ | V <sub>in</sub> =0,<br>V $\oplus$ =1.0 V                         |
| Stand-by (Mute) threshold voltage | V <sub>TH</sub> (H) | 5  | —   | V <sub>CC</sub> -1 | 5  | —    | V <sub>CC</sub> -1 | V             | V <sub>in</sub> = -40 dBm Output on                              |
|                                   | V <sub>TH</sub> (L) | 0  | —   | 1.0                | 0  | —    | 1.0                | V             | Output off   |
| Mute attenuation                  | ATT                 | 45 | 60  | —                  | 45 | 60   | —                  | dB            | V <sub>in</sub> =-55 dB<br>V $\oplus$ =1.0 V                     |
| Input impedance                   | R <sub>in</sub>     | 20 | 30  | 40                 | 20 | 30   | 40                 | k $\Omega$    |  |
| Mute on time                      |                     | —  | 10  | —                  | —  | 10   | —                  | $\mu\text{s}$ |  |
| Mute off time                     |                     | —  | 0.8 | —                  | —  | 0.8  | —                  | sec           |  |
| V <sub>out</sub> rise time        |                     | —  | 0.8 | —                  | —  | 0.8  | —                  | sec           |  |
| Channel cross-talk                | CT                  | 40 | 50  | —                  | 45 | 60   | —                  | dB            | V <sub>out</sub> =0 dBm  |
| Output power                      | P <sub>o</sub>      | —  | 19  | —                  | —  | 19   | —                  | W             | THD=10 %<br>1 channel operation                                  |
| Output power (3)                  | P <sub>o3</sub>     | —  | 22  | —                  | —  | 22   | —                  | W             | V <sub>CC</sub> =14.4 V,<br>THD=10 %, R <sub>L</sub> =4 $\Omega$ |
| Output power (4)                  | P <sub>o4</sub>     | —  | 11  | —                  | —  | 11   | —                  | W             | THD=10 %, R <sub>L</sub> =8 $\Omega$                             |
| Output Power (5)                  | P <sub>o5</sub>     | —  | 8   | —                  | —  | 8    | —                  | W             | THD=1 %, R <sub>L</sub> =8 $\Omega$                              |



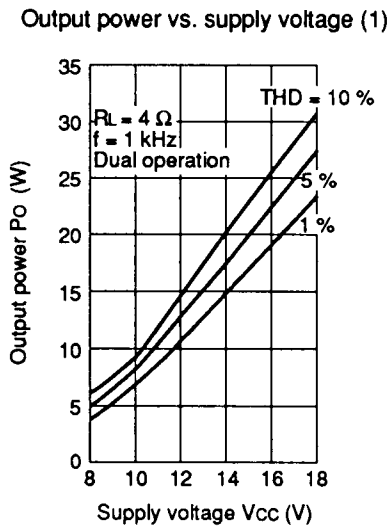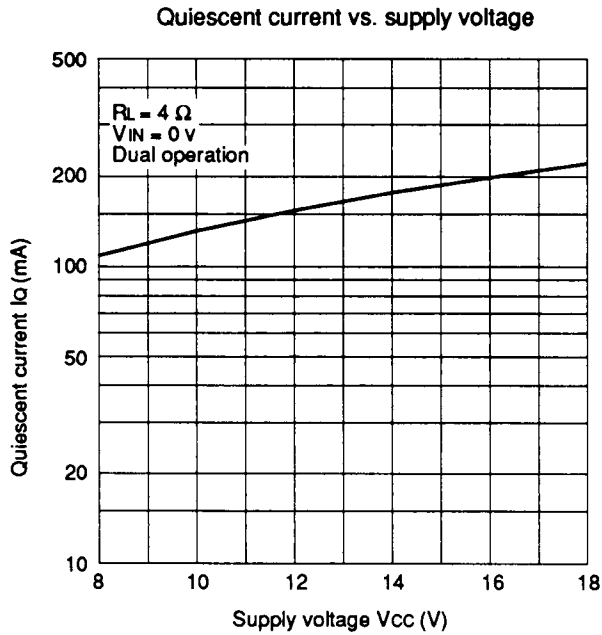

**Figure 2 HA13135 Characteristic Curves**

Output power vs. supply voltage (2)

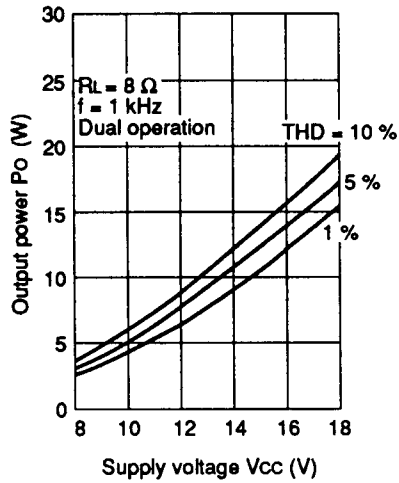

Voltage gain vs. frequency


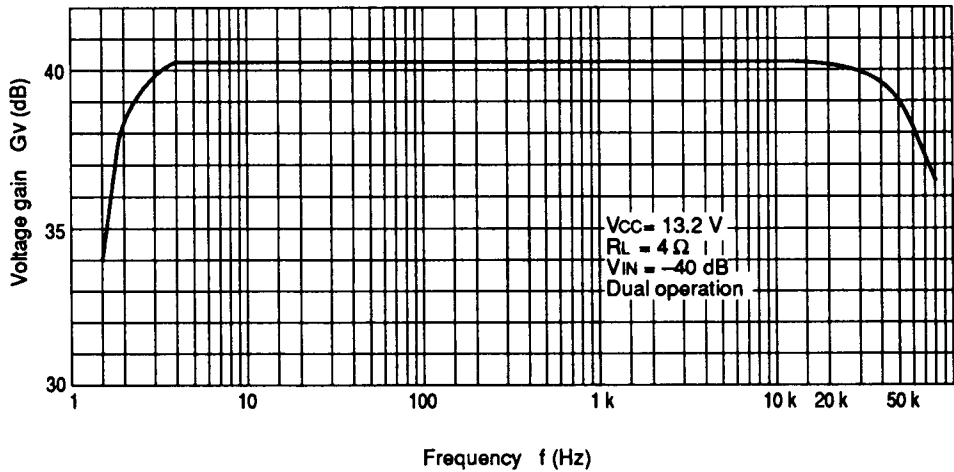


Figure 2 HA13135 Characteristic Curves (cont)



Total harmonic distortion vs. frequency

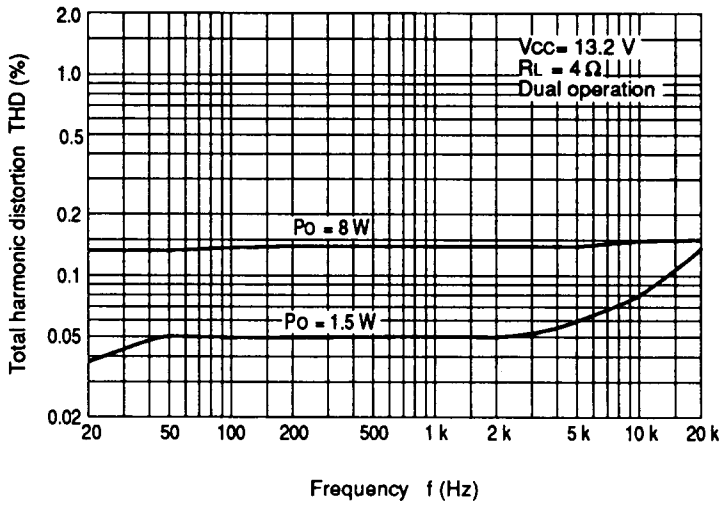

Total harmonic distortion vs. output power


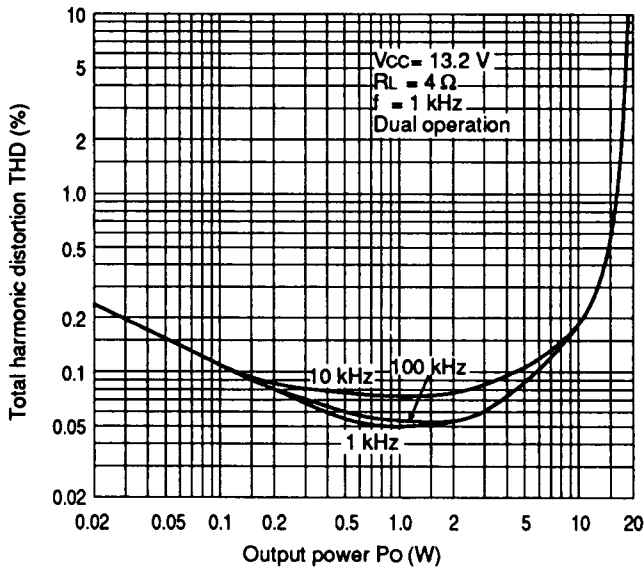


Figure 2 HA13135 Characteristic Curves (cont)



Wide band noise vs. signal source resistance

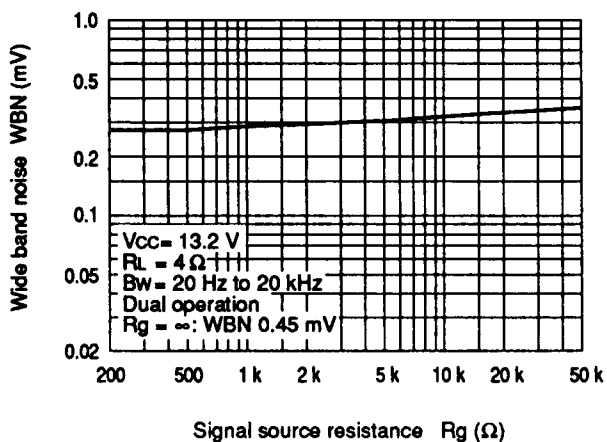

Supply voltage ripple rejection ratio vs. frequency


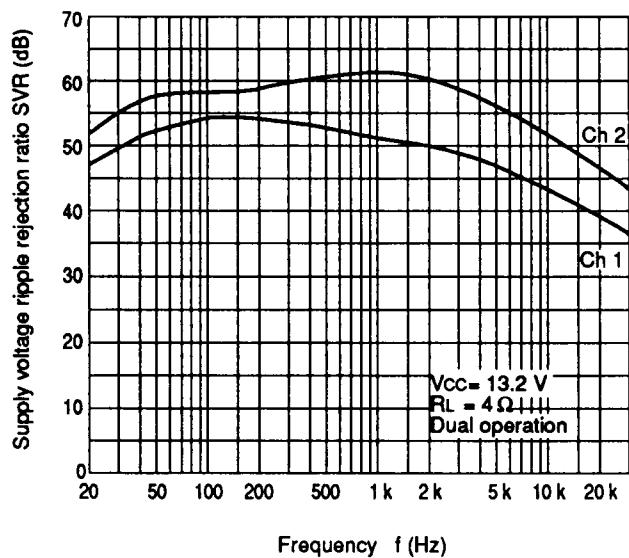


Figure 2 HA13135 Characteristic Curves (cont)





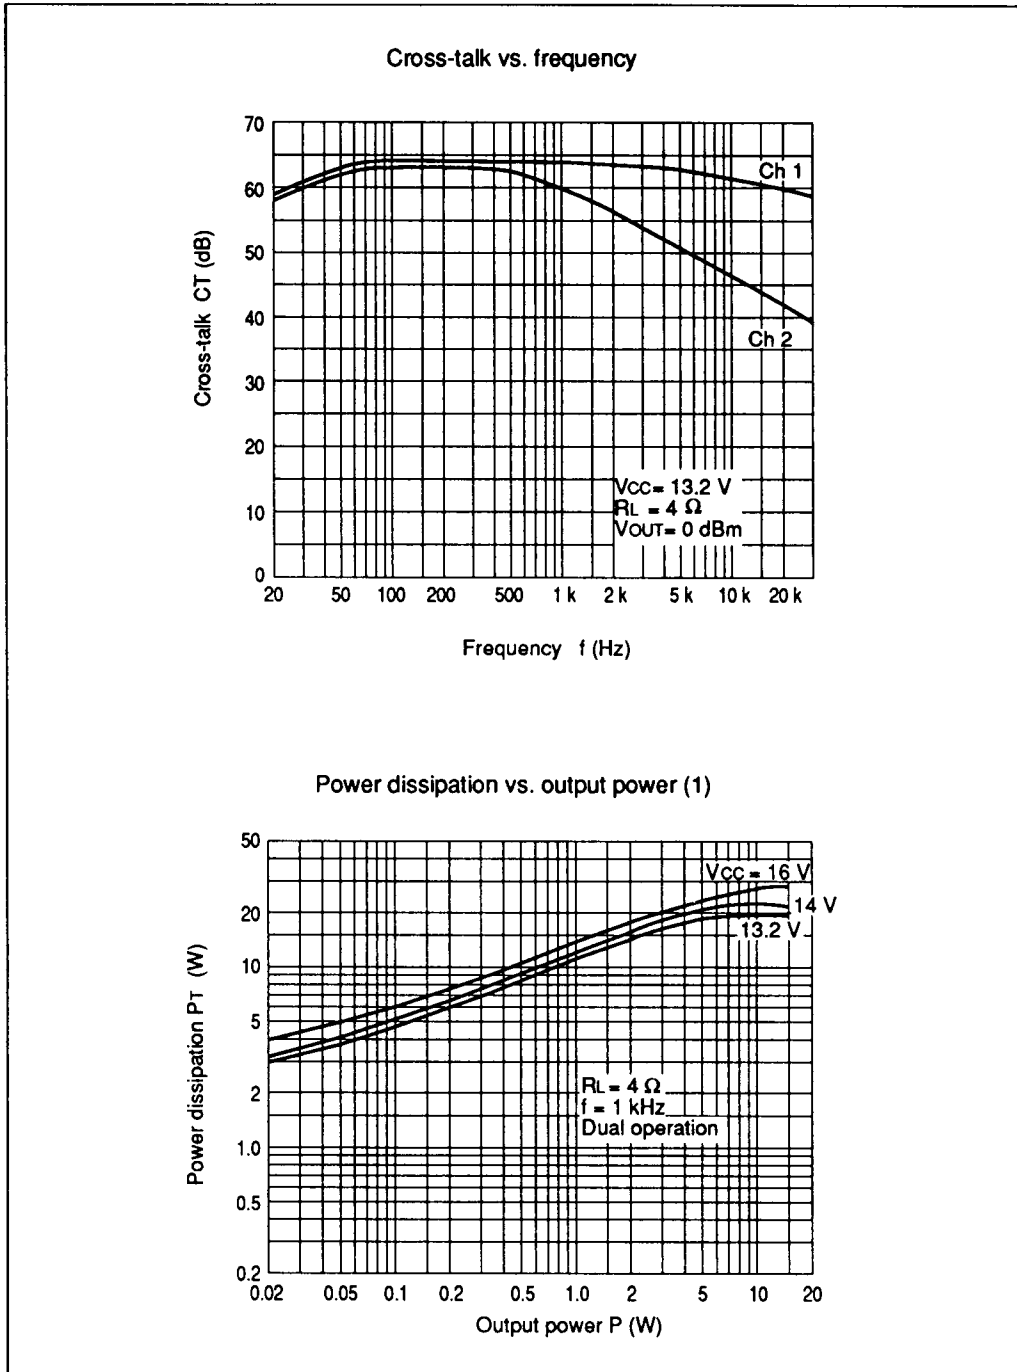

**Figure 2 HA13135 Characteristic Curves (cont)**



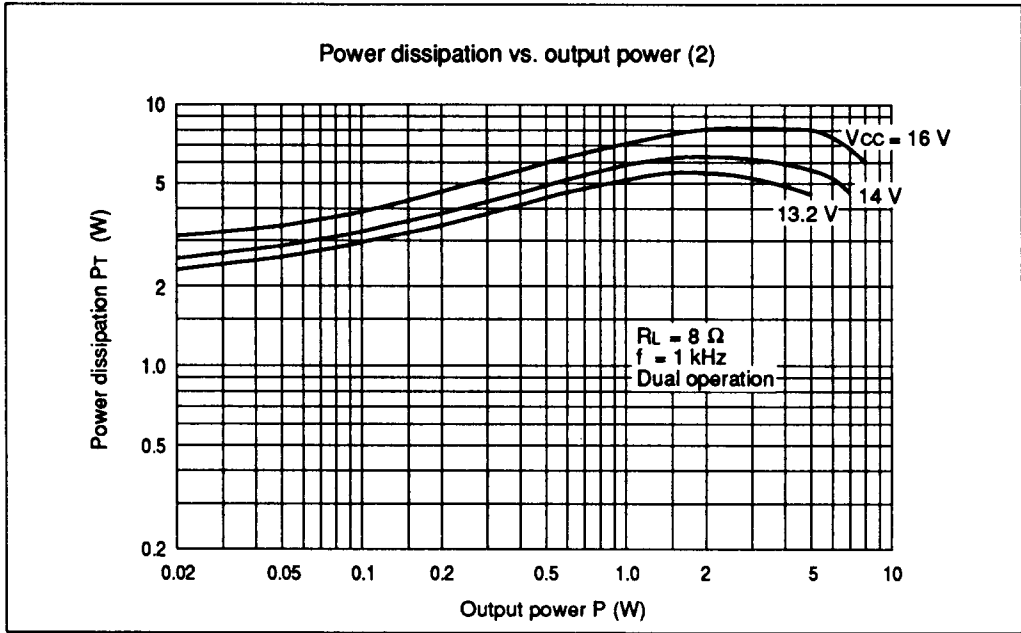


Figure 2 HA13135 Characteristic Curves (cont)

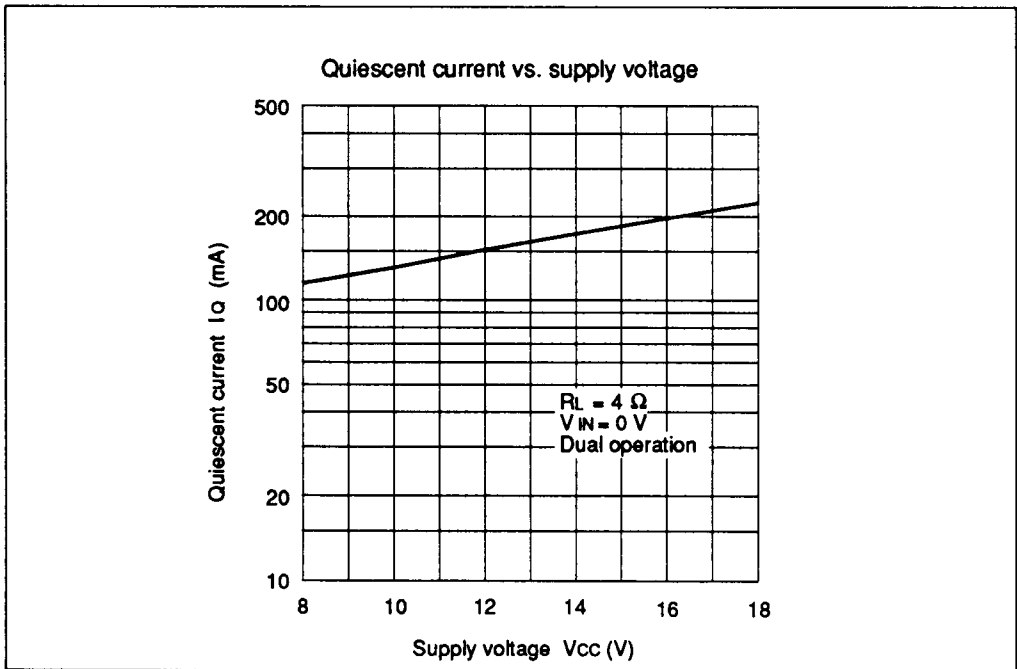


Figure 3 HA13128 Characteristic Curves






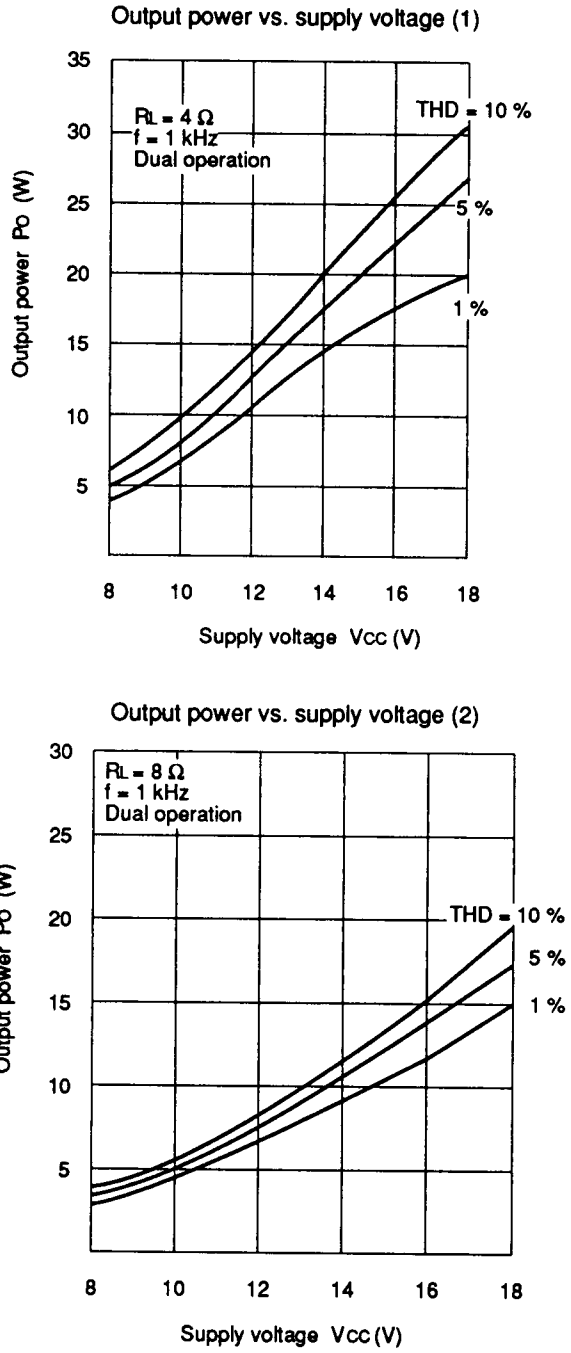


Figure 3 HA13128 Characteristic Curves (cont)

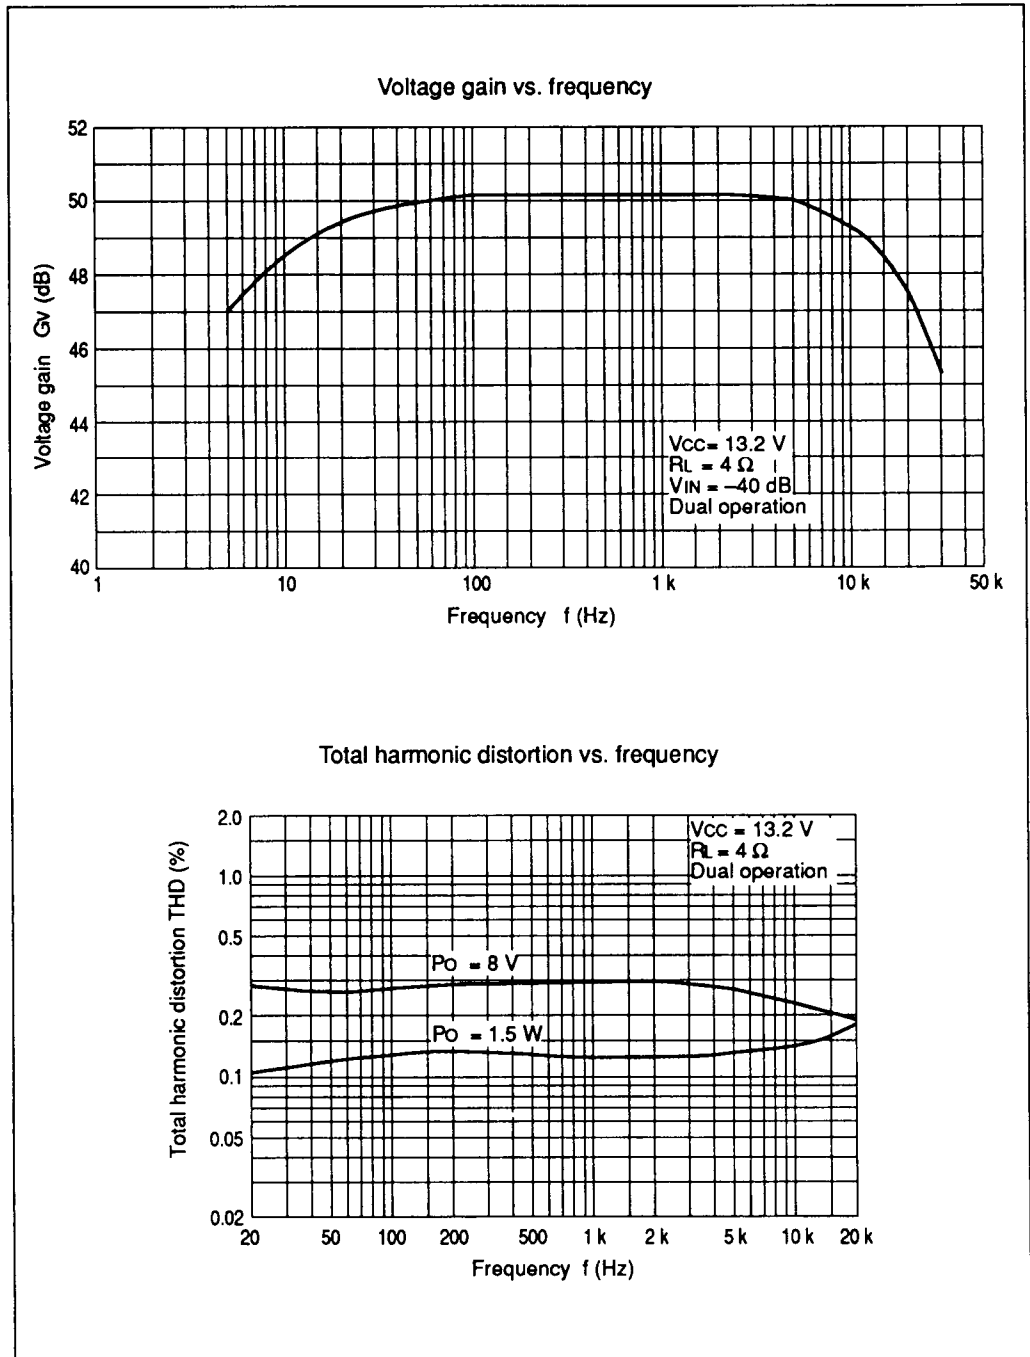

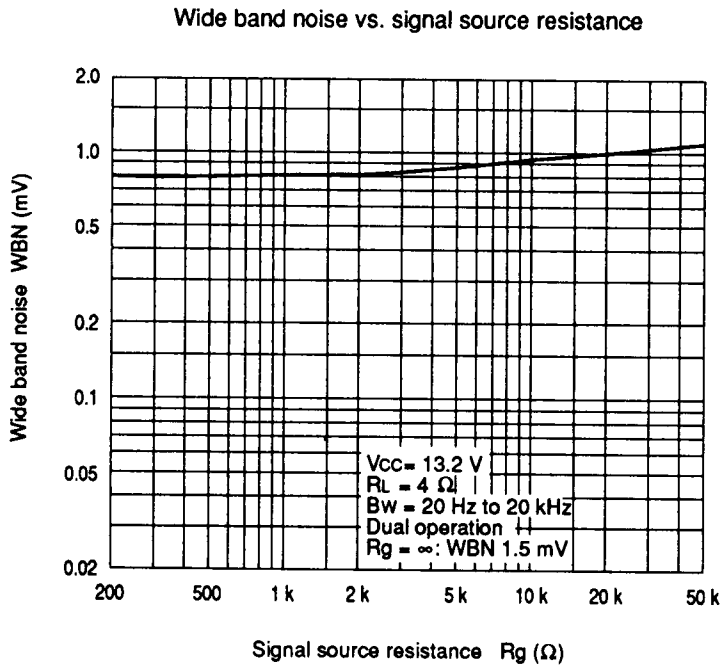

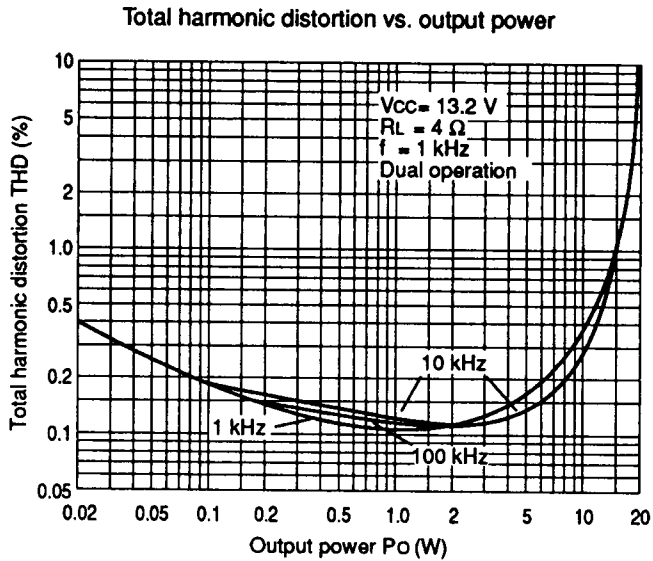

**Figure 3 HA13128 Characteristic Curves (cont)**




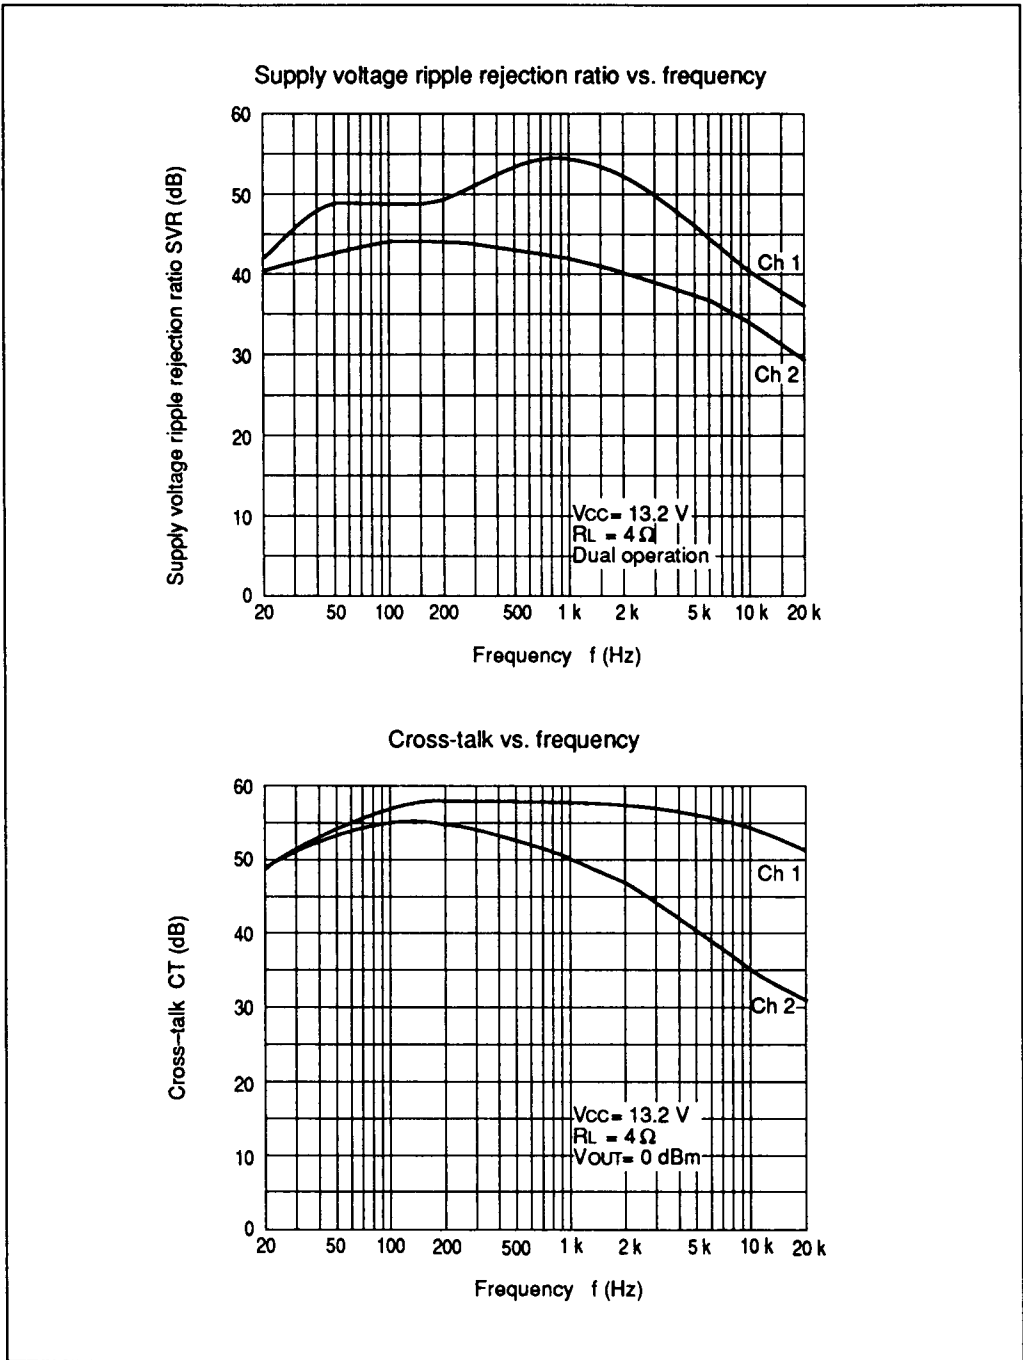


Figure 3 HA13128 Characteristic Curves (cont)



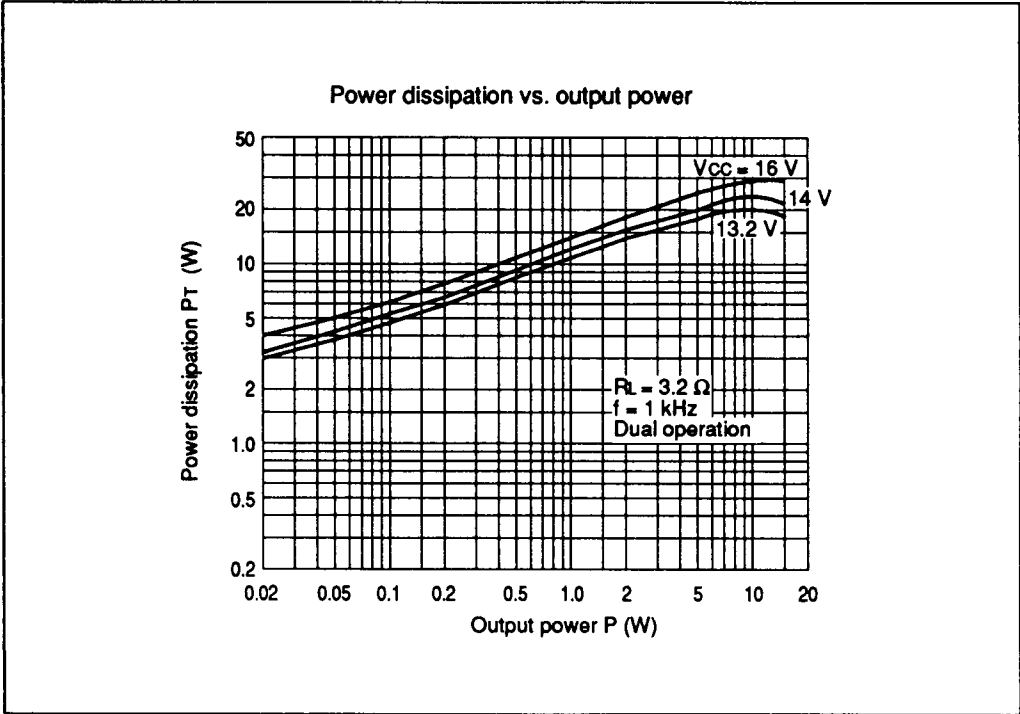

**Figure 3 HA13128 Characteristic Curves (cont)**

This datasheet has been downloaded from:

[www.DatasheetCatalog.com](http://www.DatasheetCatalog.com)

Datasheets for electronic components.