



CATALOGUE 2012

OPTOELECTRONIC COMPONENTS

www.everlight.com

EVERLIGHT

EVERLIGHT

THE SOURCE OF LIGHT

EVERLIGHT illuminates the way for many of the world's brightest companies. Acclaimed as a premiere global solution provider in the opto-semiconductor industry and held in high regard as a reliable partner for many of the world's leading electronics companies, EVERLIGHT incorporates versatility and creativity to provide customer driven value.


Since its foundation in 1983, EVERLIGHT has been an innovator in the production of LED for home appliances. Today EVERLIGHT brings decades of knowledge to a wide range of applications in the LED market including automotive, backlighting, solid state lighting, infrared products, mobile devices and signage.

From intelligent infrared sensors in mobile devices and backlit dashboards in automobiles to high-precision controls for industrial applications, EVERLIGHT improves the way we live. In addition, with applications for highly efficient indoor and outdoor lighting in offices, homes, landmarks and cities, EVERLIGHT's technology lights up the very spaces and places we enjoy everyday. In other words: EVERLIGHT makes the world brighter, more colorful and enhances quality of life.

For more information, please visit our website :

www.everlight.com

CONTENTS

	Alphanumeric Index	04
	Conditions of RoHS	13
	Application Notice	14
	Technical Data	15
 Visible LED	High Power LED	46
	Low Middle Power LED	57
	Flash LED	61
	High Power Flash LED	64
	Low Power Flash LED	65
	Subminiature LED Lamps (Leadframe)	67
	Surface Mount Chip LED (PCB)	67
	Top View LED	68
	Top View 0402 (0.2T~0.5T)	69
	Top View 0603 (0.2T~0.8T)	74
	Top View 0805	76
	Top View 1206	79
	Top View Bi-Color	83
	Top View Full Color	85
	Side View (0.2T~1.0T)	89
	Side View Bi-Color	90
	Side View Full Color	92
	Reverse Mount	94
	Reverse Mount Bi-color	95
	Reverse Mount Full color	96
	Surface Mount PLCC LEDs (Reflector)	96
	Top View LED	98
	Top View Bi-Color	99
	Top View PLCC2	105
	Top View PLCC3	107
	Top View PLCC4	108
	Side View LED	111
Super Flux LED	3 mm	112
	5 mm	112
	Flat	112
LED Lamps	2mm Tower Type	113
	3mm Round Type	114
	5mm Round Type	119
	8mm Round Type	125
	10mm Round Type	125
	3mm Cylindrical	126
	5mm Cylindrical	126
	5mm Square	126
	Rectangular	127
	3mm Assembly LED	130
	5mm Assembly LED	133
LED Digital Displays	Chip On Board Display	135
	Single Digit Display	138
	Dual Digit Display	141
	Three Digit Display	142
	Four Digit Display	144
	SMD Display	144
	Single Digit Display	146
	Dual Digit Display	148
	Three Digit Display	150
	Four Digit Display	151
	Dot Matrix Display	152
	Light Bar Display	153
Signage LED	Surface Mount Chip LED (PCB)	154
	Surface Mount PLCC LED (Reflector)	156
	Lamp Type LED	157
	5mm Round Type	157
	3mm Oval Type	158
	5mm Oval Type	158

Infrared LED, Sensors, Couplers	Infrared LED and Silicon Detector	Emitter	Lamp 3mm	162
			Lamp 5mm	163
			Piranha	166
			Side Look	167
			SMD	168
		Photo Diode	DIP	174
			Side Look	175
			SMD	176
		Photo Transistor	DIP	179
			Side Look	182
Infrared Receiver Module		SMD	183	
	Short Burst	DIP-Vo – GND – Vcc	187	
		DIP-Vo – Vcc – GND	187	
		SMD	188	
	Standard Burst	DIP-Vo – GND – Vcc	189	
		DIP-Vo – Vcc – GND	195	
		SMD	196	
	Optic-Fiber Device (Photo Link)	Receiver (PLR) Component		198
		Receiver (PLR) Module		200
		Transmitter (PLT) Component		204
Transmitter (PLT) Module			206	
Optical Sensors	Ambient Light Sensor	Analog	210	
		Digital	215	
	Proximity Sensor	Digital	216	
	RGB Color Sensor	Single Color Sensor (Analog)	217	
	Reflective Sensor		218	
	Transmissive Sensor		222	
	Photo Coupler	Darlington Transistor	4Pin DIP-DC	228
			4Pin SOP-DC	228
			6Pin DIP-DC	229
			8Pin DIP-DC	229
High Speed		5Pin SOP	230	
		8Pin SOP	231	
		8Pin DIP	232	
		8Pin Wide Body DIP	234	
IGBT/MOSFET Get Driver		5Pin SOP	235	
		8Pin SOP	235	
Discrete		8Pin DIP	236	
		8Pin Wide Body DIP	236	
	Schmitt Trigger	6Pin DIP	236	
	Transistor	4Pin DIP-AC	237	
		4Pin DIP-DC	237	
		4Pin High Isolation	238	
		4Pin SOP-AC	238	
		4Pin SOP-DC	239	
		4Pin SSOP-AC	239	
		4Pin SSOP-DC	239	
		4Pin Long Creepage	240	
		5Pin Long Creepage	240	
		6Pin DIP-DC	241	
		6Pin DIP-AC	241	
		8Pin DIP-DC	242	
		8Pin SOP-DC	242	
		8Pin SSOP-DC	243	
		16Pin SSOP-DC	243	
	Triac	4Pin SOP	244	
		4Pin DIP	245	
	6Pin DIP	246		
	Shunt Regulator	247		

ALPHANUMERIC INDEX

VISIBLE LED

10-01-C84-YSC-AAS2T2DH-AM	112	1383SURT/S530-A3	123	17-21/R7C-AN2Q1B/3T	74
1003SURD/S530-A3	129	1383SYGD/S530-E2	123	17-21/S2C-AN1P2B/3T	74
1003SYGD/S530-E2	129	1383SYGT/S530-E2	123	17-21/S2C-AP1Q2B/3T	74
1003UYD/S530-A3	129	1383UYD/S530-A3	123	17-21/T1D-ANPHY/3T	74
1006SYGSURW/S530-A3	129	15-11/BHC-AN1P2/2T	76	17-21/T1D-CP2R1TY/3T	74
103SUBD/S400-A4	113	15-11/BHC-ZL2N1QY/2T	76	17-21/T1D-KN2P2HY/3T	74
103SURD/S530-A3	113	15-11/W1D-APQHY/2T	76	17-21/W1D-APQHY/3T	74
103SYGD/S530-E2	113	15-13D/R6GHBHC-A01/2T	83	17-21/Y2C-AN1P2/3T	74
11-21/BHC-AP2R1/2T	76	15-21/B6C-YR1S2B2/2T	77	17-21/Y2C-CN1P2B/3T	74
11-21/BHC-YR1S1/2T	76	15-21/B6C-ZQ1R1N/2T	77	17-21/Y2C-CP2Q2B/3T	74
11-21/G6C-BQ1R2B/2T	76	15-21/BHC-AN1P2/2T	77	17-215/B6C-YP2R2/3T	75
11-21/G6C-FN2P2B/2T	76	15-21/G6C-BK1L2VY/2T	77	17-215/BHC-AN1P2/3T	75
11-21/GHC-YT1U2/2T	76	15-21/G6C-FM1N2B/2T	77	17-215/BHC-BP2Q2M/3T	75
11-21/R6C-AP1Q2LZ/2T	76	15-21/G6C-FP1Q1L/2T	77	17-215/G6C-BM1N2L/3T	75
11-21/R6C-AR2S2B/2T	76	15-21/GHC-R2S2/2T	77	17-215/G6C-FN2P2B/3T	75
11-21/Y2C-CP2Q2B/2T	76	15-21/GHC-YR1S1/2T	77	17-215/R6C-AQ1R2B/3T	75
11-22/R6G6C-A01/2T	79	15-21/R6C-AN1P2/2T	77	17-215/S2C-AQ1R2B/3T	75
11-22/R6G6C-QSANP/2T	79	15-21/R6C-FQ1R1B/2T	77	17-215/S2C-CP2R1B/3T	75
11-22/R6SGAC-A30/2T	79	15-21/S2C-AL2M2VY/2T	77	17-21-GPC-A0L1M2B0E-3T-AM	75
12-11/BHC-ZL1M2QY/2C	85	15-21/S2C-AQ2R2B/2T	77	17-21-R7C-A0N1P2B0C-3T-AM	75
12-21/BHC-AN1P2/2C	85	15-21/S3C-AP1Q2/2T	77	17-21-S3C-6FQ2R2L0E-3T-AM	75
12-21/BHC-ZL1M2RY/2C	85	15-21/T1D-CP1Q2TY/2T	77	17-21-Y2C-A0L1M2V0B-3T-AM	75
12-21/GHC-YR2S2/2C	85	15-21/T7D-JQ2S1PY/2T	77	17-223/BHR7C-C30/3C	89
12-21/R8C-AN1P2B/2D	85	15-21/W1D-APQHY/2T	77	18-038/RSGHBHC1-S01/2T	153
12-21/T3D-AQ2S2M/2C	85	15-21/Y2C-AN1P2/2T	77	18-225/B6R6C-C01/3T	80
12-215/BHC-AN1P2/3C	86	15-21/Y2C-CP1Q2B/2T	77	18-225/R6G6C-A01/3T	80
12-215/BHC-XL1M2HY/3C	86	15-215/G7C-BN1P2B/2T	78	18-225/S2G6C-A01/3T	80
12-215/G6C-AL2M2B/3C	86	15-215/R6C-AM2P1VY/2T	78	18-225A/R6GHW-B01/3T	80
12-215/G6C-BP1Q2L/3C	86	15-215/R6C-AP1Q1L/2T	78	19-037A/RSGHBHW1-S01/2T	153
12-215/R6C-AR1S1B/3C	86	15-21-G6C-A0N1P2B0E-2T-AM	77	19-037R/RSGHBHW1-S01/2T	153
12-215/T1D-ANPHY/3C	86	15-21-R6C-B0Q1R2B0E-2T-AM	77	19-117/BHC-YJ2K2TX/3T	69
12-215/W1D-ANPHY/3C	86	15-21-S2C-A0N2P2L0B-2T-AM	77	19-117/BHC-ZL1M2RY/3T	69
12-215/Y2C-BR1S1L/3C	86	15-21-Y2C-A0P1Q2B0E-2T-AM	77	19-117/T1D-AP2Q2QY/3T	69
12-215/Y2C-CP1Q2B/3C	86	15-22/R6G6C-A32/2T	79	19-118/BHC-ZL1M2QY/3T	69
12-215/Y2C-CQ1R1B/3C	86	15-22/R6GHC-A01/2T	79	19-123/Y2ST1D-C30/2T	80
12-21C/BHC-AN1P2/2C	85	1533SYGD/S530-E2/O	129	19-137/R6GHBHC-A01/2T	83
12-21C/BHC-YL1M2HY/2C	85	16-213/BHC-AN1P2/3T	68	19-21/B6C-AP2Q2M/3T	70
12-21C/T3D-CP1Q2B12Y/2C	85	16-213/BHC-ZL1M2QY/3T	68	19-21/BHC-AP1Q2/3T	70
12-21C/W1D-AR1S2/2C	85	16-213/GHC-YR1S1/3T	68	19-21/BHC-YL1M1RY/3T	70
12-22/BHR6C-A01/2C	89	16-213/R6C-A2225VZ/3T	68	19-21/BHC-ZQ1R2N/3T	70
12-22/G6R8C-A30/2C	89	16-213/T3D-AP1Q2QY/3T	68	19-21/G6C-AL1M2LY/3T	70
12-22/R6GHC-A30/2C	89	16-213/T7D-AQ1R1QY/3T	68	19-21/G6C-FM1N2B/3T	70
12-22/Y2G6C-A30/2C	89	16-216/T3D-AQ1R2TY/3T	68	19-21/G6C-FP1Q1L/3T	70
12-23C/R6GHBHC-A01/2C	90	16-219A/T2D-AR2T1QY/3T	68	19-21/GHC-YN1P2QY/3T	70
12-23C/S2GHBHC-A01/2C	90	16-916/T1D-AP1Q2QY/3T	86	19-21/GPC-FL1M2B/3T	70
1224SYGC/S530-E2	116	17-11/BHC-AN1P2/3T	74	19-21/R6C-AL2N1VY/3T	70
1224USOC/S530-A3	116	17-21/BHC-AN1P2/3T	74	19-21/R6C-FP1Q2L/3T	70
1224UTC/S400-A6	116	17-21/BHC-AP1Q2/3T	74	19-21/R7C-AK1L2BY/3T	70
1254-10SDRD/S530-A3	117	17-21/BHC-XLMJY/3T	74	19-21/R7C-AN2Q1B/3T	70
1254-10SURD/S530-A3	117	17-21/G6C-AN1P1B/3T	74	19-21/R8C-FN2Q1L/3T	70
1254-10SURT/S530-A3	117	17-21/G6C-AP1Q1B/3T	74	19-21/S2C-AL2M2VY/3T	70
1254-10SYGD/S530-E2	117	17-21/G6C-FM1N2B/3T	74	19-21/S2C-AQ1R2B/3T	70
1254-10SYGT/S530-E2	117	17-21/G6C-FN1P2B/3T	74	19-21/T1D-ANPHY/3T	70
1254-10UYD/S530-A3	117	17-21/G6C-FP1Q1B/3T	74	19-21/T1D-CPQTY/3T	70
1259-7SDRSYGW/S530-A3	117	17-21/GHC-XS1T2M/3T	74	19-21/W1D-ANPHY/3T	70
1259-7SURSYGW/S530-A3	117	17-21/GHC-YR1S2/3T	74	19-21/Y2C-AL1M2VY/3T	70
1259-7UYSYGW/S530-A3	117	17-21/GPC-AK0M1B/3T	74	19-21/Y2C-CP1Q2B/3T	70
1383-2SDRD/S530-A3	123	17-21/GVC-AMPB/3T	74	19-213/Y2C-CQ1R2/3T	72
1383-2SURD/S530-A3	123	17-21/R6C-AN2Q1B/3T	74	19-213/B7C-AQ2S1B2/3T	72
1383SDRD/S530-A3	123	17-21/R6C-AP1Q2L/3T	74	19-213/BHC-AN1P2/3T	72

19-213/G6C-AP1Q2/3T	72
19-213/G6C-BM1N2B/3T	72
19-213/G6C-FN2Q1L/3T	72
19-213/G6W-FN1P1B/3T	72
19-213/GHC-XS1T1N/3T	72
19-213/GHC-YP1Q2QY/3T	72
19-213/GHC-YR1S2/3T	72
19-213/R6C-AM2P1VY/3T	72
19-213/R6C-AN1P2/3T	72
19-213/R6C-AN2Q1B/3T	72

19-213/R6C-AP1Q2B/3T	72
19-213/R6C-AQ1R2B/3T	72
19-213/R8C-FN1P2/3T	72
19-213/S2C-AN1P2B/3T	72
19-213/S3C-AN2P2B/3T	72
19-213/T1D-ANPHY/3T	72
19-213/Y2C-AP1Q2B/3T	72
19-213/Y2C-CN1P2/3T	72
19-213/Y2C-CP1Q2L/3T	72
19-213/Y2C-CQ2R2L/3T	72

19-213A/T1D-CP2Q2HY/3T	71
19-217/B9C-ANQE/3T	71
19-217/BHC-AN1P2/3T	71
19-217/BHC-XK1L2B11X/3T	71
19-217/BHC-YL2M2TY/3T	71
19-217/G7C-AL1M2B/3T	71
19-217/GHC-YR1S2/3T	71
19-217/R6C-P1Q2/3T	71
19-217/S2C-AL1M2VY/3T	71
19-217/S3C-AL2N1VY/3T	71

19-217/T1D-ANPHY/3T	71
19-217/T1D-JP1Q2QY/3T	71
19-217/T7D-CS2T2B2/3T	71
19-217/W1D-CPQTY/3T	71
19-217/Y5C-AM1N1VY/3T	71
19-217/Y5C-APQB/3T	71
19-217/Y5C-AQ2R2/3T	71
19-218/BHC-ZL1M2QY/3T	73
19-218/GHC-YR1S2M/3T	73
19-218/R6C-AL1M2VY/3T	73

19-218/R6C-FM2P1B7Y/3T	73
19-218/T1D-CQ2R2TY/3T	73
19-219/T3D-AQ2R2TY/3T	73
19-219/T7D-AV1W1E/3T	73
19-219/Y5C-AM1N2VY/3T	73
19-22/G6R6C-A31/2T	81
19-22/R6BHC-B01/2T	81
19-22/R6G6C-A01/2T	81
19-22/R6GHC-C02/2T	81
19-22/Y2G6C-A14/2T	81

19-223/G6S2C-A01/2T	82
19-223/R6BHC-A05/2T	82
19-223/R6G6C-A01/2T	82
19-223/R7BHC-A30/2T	82
19-223/R7G6C-A01/2T	82
19-223/S2BHC-A01/2T	82
19-223/S2T1D-C30/2T	82
19-223/Y2G6C-A01/2T	82
19-226/R6BHC-B01/2T	81
19-226/R6G7C-B02/2T	81

19-226/R6GHC-A03/2T	81
19-237/R6GHBHC-A04/2T	83
19-237A/BHR6GHC-A01/2T	84
19-237B/R6GHBHC-C01/2T	84
19-337/R6GHBHC-A01/2T	84
204-10SDRD/S530-A3	114
204-10SUBC/S400-A4	114
204-10SUGC/S400-A5	114
204-10SURC/S400-A8	114
204-10SURC/S530-A3	114

204-10SURC/S530-A3-L	114
204-10SURD/S530-A3	114
204-10SURD/S530-A3-L	114
204-10SURT/S530-A3	114
204-10SYGC/S530-E2	114
204-10SYGD/S530-E3	114
204-10SYGT/S530-E2	114
204-10USOC/S400-A9	114
204-10UYC/S400-A9	114
204-10UYC/S530-A3	114

204-10UYC/S530-A3-L	114
204-10UYD/S530-A3	114
204-10UYD/S530-A3-L	114
204-10UYOC/S530-A3	114
204-10UYT/S530-A3	114
209SDRSYGW/S530-A3	115
209SURSUGC/S530-A3	115
209SURSUGW/S530-A3	115
209SURSUGW/S530-A3	115
209UYOSUGC/S530-A3	115

22-21/BHC-AN1P2/2C	87
22-21/GHC-YR1S2/2C	87
22-23/R6GHBHC-A01/2C	91
22-23C/R6GHBHW-C01/2C	91
23-21/G6C-AL2N1/2T	92
23-21/GHC-YR2T1/2A	92
23-21/R6C-AM1N2AY/2A	92
23-21/R8C-AN2Q1B/2T	92
23-215A/BHC-DN2P2E/5A	93
23-21B/BHC-AN1P2/2A	92

23-21B/BHC-ZL1M1Y/2A	92
23-21B/G6C-AM2P1/2A	92
23-21B/S2C-AN1P2/2A	92
23-21B/T1D-ANQHY/2A	92
23-21B/T1D-CP2Q2TY/2A	92
23-21B/W1D-ANQHY/2A	92
23-21C/T1D-CP2Q2TY/2A	92
23-22B/R7G6C-A30/2T	94
23-22B/S2BHC-C30/2A	94
23-22C/S2BHC-B30/2A	94

23-23B/R6GHBHC-A01/2A	95
24-21/BHC-AN1P2/2A	93
24-21/GHC-YR2T1/2A	93
25-21/BHC-APR/2T	93
25-21/GHC-YSU/2A	93
25-21/T1D-ANQHY/2A	93
25-21/W1D-APQHY/2A	93
264-7SDRC/S530-A3	115
264-7SDRD/S530-A3	115
264-7SUGC/C525	115

264-7SURC/S400-A8	115
264-7SURD/S530-A3	115
264-7SURT/S530-A3	115
264-7SYGC/S530-E3	115
264-7SYGD/S530-E2	115
264-7SYGT/S530-E2	115
264-7UYC/S400-A9	115
27-21/BHC-AN1P2/3C	87
27-21/BHC-AP1Q2/3C	87
27-21/GHC-YR1S2M/3C	87

27-21/R6C-AP1Q2B/3C	87
27-21/S2C-FP1Q1L/3C	87
27-21/T1D-ANPHY/3C	87
27-21/T1D-CQ1R2NW/3C	87
27-21/T3D-AP2Q2HY/3C	87
27-21/W1D-APQHY/3C	87
27-21/Y2C-CPQB/3D	87
28-21SDRC/S530-A3/TR8	65
28-21SURC/S530-A2/TR8	65
28-21UYC/S530-A3/TR8	65

30-01/B4C-AKNB	111
30-01/G4C-ARTB	111
30-01-B74-S3NC-C6T1U1DH-AM	111
30-01-B84-RFC-D4T1U1DH-AM	111
30-01-B84-YSC-A1T1U1DH-AM	111
31-01/B4C-AKNB	111
31-01/T4C-4PRB	111
31-01-B14-S3NC-C6T1U1DH-AM	111
313-2SYGC/S530-E2	119
313-2SYGD/S530-E2	119

313-2UYD/S530-A3	119
32-01/B4C-AJMB	112
32-01/G4C-AQSB	112
32-01/T4C-4PRB	112
323-2SURD/S530-A3	119
323-2SYGD/S530-E2	119
3294-15SUBC/S400-A6	118
3294-15SUGC/S400-A6	118
3294-15SURC/S400-A7	118
3294-15UBGC/S400-A6	118

33-01/B4C-AHKB	111
33-01/G4C-ARTB	111
33-01-C34-YYSC-A5T1U1CH-AM	111
33-01-C44-RRFC-D1T1U1CH-AM	111
333/B1C1-ARUA/MS	156
333/G1C1-AWYA/MS	156
333/R7C1-AUWB/X/MS	156
333/Y7C1-ATWB/X/MS	156
333-2SDRC/S530-A4	120
333-2SDRD/S530-A3	120

333-2SDRT/S530-A3	120
333-2SUBC/C470/S400-A6	120
333-2SUBD/S400-A4	120
333-2SUBW/C470/S400-A4	120
333-2SUGC/C525	120
333-2SUGC/S400-A5	120
333-2SURC/S400-A8	120
333-2SURC/S530-A2	120
333-2SURD/S530-A3	120
333-2SURT/S530-A3	120

ALPHANUMERIC INDEX

VISIBLE LED

333-2SYGC/S530-E2	120	383-2SURC/S400-A8	122	5484BN/BADC-AGJA/X/MS	158
333-2SYGD/S530-E2	120	383-2SURC/S530-A3	122	5484BN/GADC-ALMA/X/MS	158
333-2SYGT/S530-E2	120	383-2SURC/S530-A6	122	5484BN/GADC-ALMA/X/MS	158
333-2SYGW/S530-E2	120	383-2SYGC/S530-E2	122	5484BN/GADC-AMNA/X/MS	158
333-2UBC/C430	120	383-2SYGD/S530-E2	122	5484BN/GADC-AMNA/X/MS	158
333-2UTC/S400-A6	120	383-2UBC/C470	122	5484BN/R7DC-AGJB/X/MS	158
333-2UYC/S400-A4	120	383-2USOC/S530-A6	122	5484BN/R7DC-AGJB/X/MS	158
333-2UYC/S400-A7	120	383-2UYC/S400-A6	122	5484BN/R7DC-AHJB/X/MS	158
333-2UYC/S530-A3	120	383-2UYC/S530-A3	122	5484BN/R7DC-AHJB/X/MS	158
333-2UYC/S530-A6	120	393-2SURD/S530-A3	125	57-1UTC/S827-1/TR8	108
333-2UYD/S530-A3	120	393UYD/S530-A3	125	57-21/R6C-AP1Q2B/BF	108
334-15/T1C1-1VXA	121	414-10UYD/S530-A3	126	57-21B1C-A1JK2A1C-BT8-AM	109
334-15/T1C1-4VXC	121	4204-10SYGC/S530-E4	118	57-21B5P-A9/1ABBE-BT8-AM	109
334-15/T1C1-7VXC	121	42-21/BHC-AUW/1T	67	57-21GPSC-U8M1N2A5E-BT8-AM	109
334-15/T1C3-7TVA	121	42-21A/BHC-ZV1W2N/1T	67	57-21SYGC/S530-E3/TR8	108
334-15/T1C5-4PRA	121	42-21A/GHC-YX1Y2N/1T	67	57-21Y2C-H5ST1B0E-BT8-AM	109
334-15/T2C1-1SUB	121	423-2ASUGC/S400-A6/P/TR1(A)	126	573SURD/S530-A3	128
334-15/T2C1-1UWA	121	423-2UYC/S530-A6	126	573SYGD/S530-E2	128
334-15/T2C1-1UWB	121	45-21/KK2C-S30308BACB41/2T	57	583SURD/S530-A3	126
334-15/T2C1-2UWC	121	45-21/KK2C-S4040AC4CB41/2T	57	583SYGD/S530-E2	126
334-15/T2C1-4UWC	121	45-21/LK2C-B2832AC2CB2/2T	57	583UYD/S530-A3	126
334-15/T2C1-4UWC/R10	121	45-21/LK2C-B38452C4CB2/2T	57	59-146JTD/TR8	64
334-15/T2C1-7UWC	121	45-21/LK2C-B45562C4CB2/2T	57	594SUBC/C470/S400-A4	128
334-15/T2C2-1TVB	121	45-21/LK2C-B50634C6CB2/2T	57	594SURD/S530-A3	128
334-15/T2C2-6TVB	121	45-21/LK2C-B56702C4CB2/2T	57	594SYGD/S530-E2	128
334-15/T2C2-6TWB	121	45-21/QK2C-B28322C4CB2/2T	57	594UYD/S530-A3	128
334-15/T2C2-7TVA	121	45-21/QK2C-B3845AC2CB2/2T	57	61-238/LK2C-B50638F6GB2/ET	96
334-15/T2C3-1RTB	121	45-21/QK2C-B45562C4CB2/2T	57	61-238/RSGBB7C-B02/ET	96
334-15/T2C3-2RTB	121	45-21/QK2C-B56702C4CB41/2T	57	61-238UMC/S3085/TR8/LT	96
334-15/T2C3-4RTB	121	45-21/QK2C-B50632C4CB2/2T	57	62-118AUNC/T3438M4N7BF/TR8-T	100
334-15/T2C5-1MQB	121	45-21UMC/3235A54/TR8	96	62-129AUMR4C/T3236M6N9PBF/TR8-T	101
334-15/X1C2-1UWA	121	48-213/BHC-ZM2P1QY/3C	88	62-217B/KK2C-S2727PAQAB42Z15/2T	60
334-15/X1C5-6QSA	121	48-213/R6C-AM1N2VY/3C	88	62-217B/KK2C-S3030PQB42Z15/2T	60
334-15/X2C1-1UWB	121	48-213/T2D-AQ2R2QY/3C	88	62-217B/KK2C-S3030QAR2B42Z15/2T	60
334-15/X2C1-4UWA	121	48-213/T3D-AP1Q2TY/3C	88	62-217B/KK2C-S4040QAR2B42Z15/2T	60
336SURSYGW/S530-A3	119	48-213/T7D-AQ1R2QY/3C	88	62-217B/QK2C-S4040QAR1B42Z15/2T	60
336SYGSYGD/S530-E2	119	48-22/R7T2D-C02/2C	90	62-217B/QK2C-S5757QAR1B42Z15/2T	60
339-1SURSYGC/S530-A3	122	484-10SURT/S530-A3	116	62-217B/QK2C-S5757R1R3B42Z15/2T	60
339-1SURSYGW/S530-A3	122	484-10UTC/S400-A6	116	62-217B/QK2C-S6565R1R3B42Z15/2T	60
339-1UYSYGW/S530-A3	122	484-10UYT/S530-A3	116	62-227B/KK2C-S2727N4P3B2Z12/2T	60
339-1UYUBW/S530-A4	122	494-10SURT/S530-A3	116	62-227B/KK2C-S3030P3P4B2Z12/2T	60
3474AHBR	157	494-10SYGT/S530-E2	116	62-227B/QK2C-S3535P3P4B2Z12/2T	60
3474AHGR	157	50-215BUMC/3437425/TR8	96	62-227B/QK2C-S4040P3P4B2Z12/2T	60
3474AHRR	157	50-215UMC/3437555/TR8	108	62-227B/QK2C-S5050P4Q3B2Z12/2T	60
3474ALBR	157	50-315UM2C/LXXXXXXX/TR8-T	100	62-227B/QK2C-S5757P4Q3B2Z12/2T	60
3474ALGR	157	513SURD/S530-A3	127	62-227B/QK2C-S6565P4Q3B2Z12/2T	60
3474ALRR	157	513SYGD/S530-E2	127	6324-15SUBC/S400-X10	123
3474BHBR	157	514SURD/S530-A3	127	6324-15SURC/S400-A9	123
3474BHGR	157	514SYGD/S530-E2	127	6364/BADA-AHKA/X/MS	158
3474BHRR	157	514UYD/S530-A3	127	6364/BADA-AKMA/X/MS	158
35-01/B4C-AKNB	112	519-1SURSYGW/S530-A3	127	6364/GADA-ANQA/X/MS	158
35-01/T4C-4PRB	112	523-2SDRD/S530-A3	128	6364/GADA-AQSA/X/MS	158
363-2SURD/S530-A3	125	523-2SURD/S530-A3	128	6374/R7DA-AJKB/X/MS	158
363-2SYGD/S530-E2	125	523-2UYD/S530-A3	128	6374/R7DA-AKVB/X/MS	158
363SYGD/S530-E2	125	523SURD/S530-A3	128	6374/Y7DA-AJKB/X/MS	158
38-01-A74-YSC-A2T1U1DH-AM	111	523SYGD/S530-E2	128	6374/Y7DA-ALNB/X/MS	158
38-01-A84-RAC-D4T1U1DH-AM	111	523UYD/S530-A3	128	65-11/BHC-ARIS2B2/2T	101
38-01-A84-S3NC-C1S2T2CH-AM	111	5484BN/BADC-AFHA/X/MS	158	65-11/T2C-FV1W2E/2T	101
383-2SUBC/C470/S400-A6	122	5484BN/BADC-AFHA/X/MS	158	65-11UTC/S933/TR8	101
383-2SURC/S400-A6	122	5484BN/BADC-AGJA/X/MS	158	65-21/G6C-AN2Q1/3T	102

65-21Y2C-CJL2X/3T	102
65-21Y2SC-ARIS2B/2T	102
65-21Y2SC-FR2S1B/2T	102
65-21B1C-A1H2K1A1C-2T8-AM	102
65-21B3T-A0S1T1A7E-2T8-AM	102
65-21G6C-Y2P2R1B7E-2T8-AM	102
65-21R7C-A6Q2S1B0E-2T8-AM	102
65-21S2SC-B2S1T1B7E-2T8-AM	102
67-03/BHG-R6W-11/2T	107
67-03/RSGH-BHC-B06/1T	107

67-03A/R6GH-BHW-A01/2T/MS	154
67-11/BHC-FQ2S1F/2T	103
67-11/GHC-AT2V1/2T	103
67-11/W1C-EST12N/2T	103
67-11/W1C-FV1W2F/2T	103
67-21/B3C-BN1Q2N/2T	104
67-21/B7C-AS2U1N/2T	104
67-21/BHC-FP1Q2F/2T	104
67-21/G4C-BQ1T12N/2T	104
67-21/G6C-FN2P2B/2T	104

67-21/GBC-YV2W2N/2T	104
67-21/GHC-AS2UB17Z/2T	104
67-21/GHC-BV1/2T	104
67-21/KK2C-B5063AC4CB2/2T	58
67-21/KK2C-S3030AC2CB2/2T	58
67-21/KK2C-S4040AC2CB2/2T	58
67-21/LK2C-B28322C4CB2/2T	58
67-21/LK2C-B28324C6CB2/2T	58
67-21/LK2C-B38454C6CB2/2T	58
67-21/LK2C-B45564C6CB2/2T	58

67-21/LK2C-B50634C6CB2/2T	58
67-21/LK2C-B50636C8CB2/2T	58
67-21/LK2C-B56704C6CB2/2T	58
67-21/QK2C-B28322C4CB2/2T	58
67-21/QK2C-B38452C4CB2/2T	58
67-21/QK2C-B45562C4CB2/2T	58
67-21/QK2C-B50632C4CB2/2T	58
67-21/QK2C-B56702C4CB2/2T	58
67-21/R6C-AP2RB/2T	104
67-21/R6C-FN2QBZ/2T	104

67-21/R6C-FR2T1B/2T	104
67-21/R6C-FS1UB/2T	104
67-21/RSC-FT2V1B/2T	104
67-21/RSC-T1V1/2T	104
67-21/S2C-FQ2R2B/2T	104
67-21/S3C-AS1T1/2T	104
67-21/T2C-YV2W2B22/2A0	104
67-21/T2C-ZV1W2E/2T	104
67-21/T3C-EU1V2W/2A0	104
67-21/Y2C-AP1QB/2T	104

67-21/Y2C-AS1T1/2T	104
67-21/Y2C-BR2T1B/2T	104
67-21/YSC-FU1UB/2T	104
67-21/YSC-FU1VB/2T	104
67-21B1C-R3K1M06C-2T8-AM	103
67-21B3T-Q8R1S2M0E-2T8-AM	103
67-21/GHC-Z1T2J2A6C-2T8-AM	103
67-21R7C-F3K1L1B6A-2T8-AM	103
67-21S2C-B2K2L2B7A-2T8-AM	103
67-21SUBC/S400-X9/TR8	104

67-21SURC/S530-A7/TR8	104
67-21UBC/C430/TR8	104
67-21UYC/S530-A6/TR8	104
67-22/G3G3C-B45/2T	98
67-22/R6BHC-B07/2T	98
67-22/R6G6C-B09/2T	98
67-22/R6Y2C-B31/2T	98
67-22SURSYGC/S530-A2/TR8	98
67-22UYSYGC/S530-A5/TR8	98
67-23/R6GHBHC-B05/2T	97

67-23/T2C-EY2Z0/2T	97
67-235UWC/TR8	97
67-23SDRSYGUBC/TR8	97
67-31A/B7C-AT1U2M23/2T	105
67-31A/GHC-YV1W2EZ3/2T	105
67-31A/SAC-AW1X2B9Z5/2T	105
67-31E/RSC-AV1W2B9Z5/2T	105
67-31E-GPSC-U8P2R1B7G-2T8-AM	106
67-31E-S3SC-M1U2V2C1G-2T8-AM	106
67-31E-Y9NC-E9V1AAC1G-2T8-AM	106

67-31EZ-BLT-2AV2ABC2F-2T8-AM	106
69-23BUMD/TR8	64
7343/BAD5-AGJA/X/MS	156
7343/GAD5-ANQA/X/MS	156
7343/R7C2-AQSB/X/MS	156
7343/R7D5-AHKB/X/MS	156
7343/Y7C2-AQSB/X/MS	156
7343-2SURC/S400-A9	123
7343-2SURD/S530-A3	123
7343-2SYGD/S530-E3	123

7343-2USRC/S1060	123
7343-2UYC/H2/S400-A9	123
7343-2UYC/S1060	123
7343-2UYC/S400-A9	123
7343-2UYC/S530-A3	123
7344/V7C2-ASVA/X/MS	156
7344-15SUBC/C470/S400-A6	124
7344-15SUGC/S400-A5	124
7344-15SUGC/S400-X6	124
7383/BAC3-ANQA/X/MS	156

7383/G1C3-ATVA/X/MS	156
7383/R2C3-AMQB/P	124
7383/R7C3-AQSB/X/MS	156
7383/R7C3-ARUB/X/MS	156
7383/V7C3-ARTA/X/MS	156
7383/Y7C3-AQSB/X/MS	156
7383/Y7C3-ARUB/X/MS	156
7383USRW/S1089-2	124
91-21SUBC/S400-A4/TR7	65
91-21SUGC/S400-A4/TR7	65

91-21SURC/S530-A6/TR7	65
91-21SYGC/S530-E4/TR7	65
91-21UBC/C430/TR7	65
91-21USRC/S530-A4/TR7	65
93-22SURSYGC/S530-A3/TR8	98
94-22SUBC/S400-A4/S2	109
95-21SDRC/S530-A3/TR10	66
95-21SUBC/S400-A5/TR10	66
95-21SUGC/S400-A4/TR7	66
95-21SYGC/S530-E2/TR7	66

95-21USRD/S357/TR7	66
95-21UYC/S530-A5/TR7	66
99-616LM2C/L6570SGS/TR8-T	110
99-616LM2C/L6772SG6/TR8-T	110
99-713LM2C/L6772T3U6FO/TR8-T	110
A1394B/3SYG/S530-E2	131
A1479-1B/SURSYGW/S530-A3	133
A1844B/4SYG/S530-E2	132
A203B/SUR/S530-A3	133
A203B/SYG/S530-E2	133

A203B/UY/S530-A3	133
A214B/SUR/S530-A3	130
A214B/SYG/S530-E2	130
A214B/UY/S530-A3	130
A253B/SUR/S530-A3	134
A253B/SYG/S530-E2	134
A264B/SUB/S400-A4	130
A264B/SUR/S530-A3	130
A264B/SYG/S530-E2	130
A264B/UY/S530-A3	130

A274B/SYG/S530-E2	130
A2774B/SYG/S530-E2	132
A2784B/2SYGSDRW/S530-A3	132
A694B/2SUR/S530-A3	131
A694B/2SYG/S530-E2	131
A694B/2UY/S530-A3	131
A694B/SURSYG/S530-A3	131
A694B/SYGUY/S530-A3	131
A93B/SUR/S530-A3	134
B1001SDRWB/S530-A3	152

B1001SURWB/S530-A3	152
B1001SYGWA/S530-E2	152
B1001USOWA/S530-A4	152
B1010SURD/S530-A3	152
B1010SYGD/S530-E2	152
D305SURWA/S530-A3	138
D306SURWA/S530-A3	138
D425SURWA/S530-A3	138
D425SYGWA/S530-E2	138
D425USOWA/S530-A4	138

D426SURWB/S530-A3	139
D426SYGWA/S530-E2	139
D426USOWA/S530-A3	139
D426UYOWB/S530-A3	139
D511SURWB/S530-A3	139
D512SURWB/S530-A3	139
D512UBWA/C470	139
D515SURWA/S530-A3	140
D525SURWA/S530-A3	140
D525SYGWA/S530-E2	140

D525USOWA/S530-A3	140
D526SURWA/S530-A3	140
EHP-69/GT01C-P01/TR	63
EHP-A09K-BRTT-5670HDBED9K-1T8-AM	54
EHP-A09K-S5TC-S3000CADAE1K-1T8-AM	54
EHP-A09K-Y8TC-E9000BBDAE1K-1T8-AM	54
EHP-B05MLG/GT04H-P05/50K/R11/TR	56
EHP-B05MLG/GT04H-P05/57K/R11/TR	56
EHP-B05MLG/GT04H-P05/65K/R11/TR	56
EHP-B05MLG/KM04H-P05/27K/N42/TR	56

ALPHANUMERIC INDEX

VISIBLE LED

EHP-B05MLG/KM04H-P05/30K/N42/TR	56	ELSH-F91N1-0CPGS-C4000	48	ELSW-E91B3-0LPNM-DB6B8	52
EHP-B05MLG/KM04H-P05/35K/N51/TR	56	ELSH-F91N1-0CPGS-C4500	48	ELSW-F41Y1-0LPNM-AA3A5	52
EHP-B05MLG/KM04H-P05/40K/N51/TR	56	ELSH-F91N1-0CPHS-C4000	48	ELSW-F51O1-0LPNM-AR3R4	52
EHP-B05MLG/KM04H-P05/45K/N52/TR	56	ELSH-F91R3-0LPNM-BR4R6	49	ELSW-F51R1-0LPNM-AR5R6	52
EHP-C04/NT01A-P01/TR	62	ELSH-F91Y3-0LPNM-BA3A5	49	ELSW-F61M1-0CPHS-C2700	51
EHP-C04/NT01H-P01/TR	61	ELSH-J11C1-0CPGS-C5700	48	ELSW-F61M1-0LPGS-C2700	51
ELCH06/BJ4J6Z10-N0	62	ELSH-J11C1-0CPGS-C6500	48	ELSW-F61O1-0PPNM-AR3R4	52
ELCH07-5070J5J7293910-N0	63	ELSH-J11C1-0VPGS-C5000	48	ELSW-F61R1-0PPNM-AR5R6	52
ELCOB-N40C6-0LTGE-C5000	47	ELSH-J11C1-0VPHS-C5700	48	ELSW-F71G1-0LPNM-CG1G2	52
ELCOB-N50M6-0LTJE-C2700	47	ELSH-J11C1-0VPHS-C6500	48	ELSW-F71G1-0LPNM-CG2G3	52
ELCOB-N70C8-0LTGE-C5000	47	ELSH-J11C1-1LPGS-C5700	48	ELSW-F71M1-0CPGS-C2700	51
ELCOB-N70M8-0LTJE-C2700	47	ELSH-J11G3-0LPNM-DG1G3	49	ELSW-F71M1-0CPHS-C2700	51
ELSH-E71B1-0LPNM-CB7B8	49	ELSH-J11N1-0VPGS-C4000	48	ELSW-F71M1-0CPHS-C3000	51
ELSH-E81B1-0LPNM-CB7B8	49	ELSH-J11N1-0VPGS-C4500	48	ELSW-F71M1-0CPHS-C3500	51
ELSH-E81B3-0LPNM-DB6B8	49	ELSH-J21C1-0CPGS-C5000	48	ELSW-F71M1-0LPGS-C3000	51
ELSH-E91B3-0LPNM-DB6B8	49	ELSH-J21C1-0VPGS-C5700	48	ELSW-F71M1-0LPGS-C3500	51
ELSH-F31Y1-0LPNM-AA3A5	49	ELSH-J21C1-0VPGS-C6500	48	ELSW-F71M1-1LPHS-C3000	51
ELSH-F31Y1-0LPNM-AA4A6	49	ELSH-J21C1-1LPGS-C5700	48	ELSW-F81C1-0LPGS-C5000	51
ELSH-F41O1-0LPNM-AR3R4	49	ELSH-J21M3-0CPHS-D2700	50	ELSW-F81G1-0GPNM-CG1G2	52
ELSH-F41R1-0LPNM-AR5R6	49	ELSH-J21M3-0CPHS-D3000	50	ELSW-F81M1-0CPGS-C2700	51
ELSH-F41Y1-0LPNM-AA3A5	49	ELSH-J21M3-0LPGS-D2700	50	ELSW-F81M1-0CPGS-C3000	51
ELSH-F41Y1-0LPNM-AA4A6	49	ELSH-J21M3-0LPGS-D3000	50	ELSW-F81M1-0CPGS-C3500	51
ELSH-F51O1-0LPNM-AR3R4	49	ELSH-J21M3-0LPGS-D3500	50	ELSW-F81M1-0VPHS-C2700	51
ELSH-F51R1-0LPNM-AR5R6	49	ELSH-J31M3-0CPGS-D2700	50	ELSW-F81M1-0VPHS-C3000	51
ELSH-F61M1-0CPHS-C2700	48	ELSH-J31M3-0CPGS-D3000	50	ELSW-F81M1-1LPHS-C3000	51
ELSH-F61M1-0LPGS-C2700	48	ELSH-J31M3-0CPGS-D3500	50	ELSW-F81N1-0LPGS-C4000	51
ELSH-F61O1-0PPNM-AR3R4	49	ELSH-J31N3-0LPGS-D4000	50	ELSW-F81N1-0LPGS-C4500	51
ELSH-F61R1-0PPNM-AR5R6	49	ELSH-J41M3-0CPHS-D2700	50	ELSW-F81N1-0VPHS-C4000	51
ELSH-F71G1-0LPNM-CG1G2	49	ELSH-J41M3-0CPHS-D3000	50	ELSW-F81R3-0LPNM-BR4R6	52
ELSH-F71G1-0LPNM-CG2G3	49	ELSH-J41M3-0CPHS-D3500	50	ELSW-F81Y3-0LPNM-BA3A5	52
ELSH-F71M1-0CPGS-C2700	48	ELSH-J41N3-0CPGS-D4000	50	ELSW-F91C1-0CPGS-C5000	51
ELSH-F71M1-0CPHS-C2700	48	ELSH-J41N3-0LPGS-D4500	50	ELSW-F91C1-0CPHS-C5000	51
ELSH-F71M1-0CPHS-C3000	48	ELSH-J51C3-0LPGS-D5000	50	ELSW-F91C1-0LPGS-C5700	51
ELSH-F71M1-0CPHS-C3500	48	ELSH-J51M3-0CPGS-D2700	50	ELSW-F91C1-0LPGS-C6500	51
ELSH-F71M1-0LPGS-C3000	48	ELSH-J51M3-0CPGS-D3000	50	ELSW-F91G3-0LPNM-DG1G3	52
ELSH-F71M1-0LPGS-C3500	48	ELSH-J51M3-0CPGS-D3500	50	ELSW-F91M1-0VPGS-C2700	51
ELSH-F71M1-1LPHS-C3000	48	ELSH-J51N3-0CPGS-D4500	50	ELSW-F91M1-0VPGS-C3000	51
ELSH-F81C1-0LPGS-C5000	48	ELSH-J51N3-0CPHS-D4000	50	ELSW-F91M1-0VPGS-C3500	51
ELSH-F81G1-0GPNM-CG1G2	49	ELSH-J51N3-0CPHS-D4500	50	ELSW-F91M1-1LPGS-C3000	51
ELSH-F81G1-0GPNM-CG2G3	49	ELSH-J61C3-0CPGS-D5000	50	ELSW-F91N1-0CPGS-C4000	51
ELSH-F81M1-0CPGS-C2700	48	ELSH-J61C3-0CPHS-D5000	50	ELSW-F91N1-0CPGS-C4500	51
ELSH-F81M1-0CPGS-C3000	48	ELSH-J61C3-0LPGS-D5700	50	ELSW-F91N1-0CPHS-C4000	51
ELSH-F81M1-0CPGS-C3500	48	ELSH-J61C3-0LPGS-D6500	50	ELSW-F91R3-0LPNM-BR4R6	52
ELSH-F81M1-0VPHS-C2700	48	ELSH-J61N3-0CPGS-D4000	50	ELSW-F91Y3-0LPNM-BA3A5	52
ELSH-F81M1-0VPHS-C3000	48	ELSH-J61N3-0CPGS-D4500	50	ELSW-J11C1-0CPGS-C5700	51
ELSH-F81M1-1LPHS-C3000	48	ELSH-J71C3-0CPGS-D5000	50	ELSW-J11C1-0CPGS-C6500	51
ELSH-F81N1-0LPGS-C4000	48	ELSH-J71C3-0CPGS-D5700	50	ELSW-J11C1-0VPGS-C5000	51
ELSH-F81N1-0LPGS-C4500	48	ELSH-J71C3-0CPGS-D6500	50	ELSW-J11C1-0VPHS-C5700	51
ELSH-F81N1-0VPHS-C4000	48	ELSH-J71C3-0CPHS-D5700	50	ELSW-J11C1-0VPHS-C6500	51
ELSH-F81R3-0LPNM-BR4R6	49	ELSH-J71C3-0CPHS-D6500	50	ELSW-J11C1-1LPGS-C5700	51
ELSH-F81Y3-0LPNM-BA3A5	49	ELSH-J81C3-0CPGS-D5700	50	ELSW-J11G3-0LPNM-DG1G3	52
ELSH-F91C1-0CPGS-C5000	48	ELSH-J81C3-0CPGS-D6500	50	ELSW-J11N1-0VPGS-C4000	51
ELSH-F91C1-0CPHS-C5000	48	ELSH-Q61F1-0LPNM-JF3F8	49	ELSW-J11N1-0VPGS-C4500	51
ELSH-F91C1-0LPGS-C5700	48	ELSH-Q91E1-0LPNM-JD3D8	49	ELSW-J21C1-0CPGS-C5000	51
ELSH-F91C1-0LPGS-C6500	48	ELSH-Q91L1-0LPNM-CB4B6	49	ELSW-J21C1-0VPGS-C5700	51
ELSH-F91G3-0LPNM-DG1G3	49	ELSWD-F81M1-0LPHE-C3000	54	ELSW-J21C1-0VPGS-C6500	51
ELSH-F91M1-0VPGS-C2700	48	ELSWD-J21C1-0LPGE-C5700	54	ELSW-J21C1-1LPGS-C5700	51
ELSH-F91M1-0VPGS-C3000	48	ELSW-E71B1-0LPNM-CB7B8	52	ELSW-J21M3-0CPHS-D2700	53
ELSH-F91M1-0VPGS-C3500	48	ELSW-E81B1-0LPNM-CB7B8	52	ELSW-J21M3-0CPHS-D3000	53
ELSH-F91M1-1LPGS-C3000	48	ELSW-E81B3-0LPNM-DB6B8	52	ELSW-J21M3-0LPGS-D2700	53

ELSW-J21M3-0LPGS-D3000	53	S321SURWA/S530-A3	135	
ELSW-J21M3-0LPGS-D3500	53	S321SYGWA/S530-E2	135	
ELSW-J31M3-0CPGS-D2700	53	S321USOWA/S530-A4	135	
ELSW-J31M3-0CPGS-D3000	53	S322SURWA/S530-A3	135	
ELSW-J31M3-0CPGS-D3500	53	S322SYGWA/S530-E2	135	
ELSW-J31N3-0LPGS-D4000	53	S322UBWA/C470	135	
ELSW-J41M3-0CPHS-D2700	53	S322USOWA/S530-A4	135	
ELSW-J41M3-0CPHS-D3000	53	S4005SYGWA/S530-E2	137	
ELSW-J41M3-0CPHS-D3500	53	S4005USOWA/S530-A3	137	
ELSW-J41N3-0CPGS-D4000	53	S4006SURWA/S530-A3	137	
ELSW-J41N3-0LPGS-D4500	53	S4006USOWA/S530-A4	137	
ELSW-J51C3-0LPGS-D5000	53	S506SYGWA/S530-E2	145	
ELSW-J51M3-0CPGS-D2700	53	SD405SURWA/S530-A3/S290	146	
ELSW-J51M3-0CPGS-D3000	53	SD406SURWA/S530-A4/S290	146	
ELSW-J51M3-0CPGS-D3500	53	SD406SYGWA/S530-E2/S290	146	
ELSW-J51N3-0CPGS-D4500	53	SD506SURWA/S530-A4/S290	147	
ELSW-J51N3-0CPHS-D4000	53	SD511SYGWA/S530-E2/S290	147	
ELSW-J51N3-0CPHS-D4500	53	SD512SYGWA/S530-E2/S290	147	
ELSW-J61C3-0CPGS-D5000	53	SF405SURWA/S530-A3/S290	150	
ELSW-J61C3-0CPHS-D5000	53	SF405SYGWA/S530-E2/S290	150	
ELSW-J61C3-0LPGS-D5700	53	SF511SURWA/S530-A3/S290	150	
ELSW-J61C3-0LPGS-D6500	53	SF512SURWA/S530-A3/S290	150	
ELSW-J61N3-0CPGS-D4000	53	SF512SYGWA/S530-E2/S290	150	
ELSW-J61N3-0CPGS-D4500	53	SS205SURWA/S530-A3/S290	144	
ELSW-J71C3-0CPGS-D5000	53	SS205SYGWA/S530-E2/S290	144	
ELSW-J71C3-0CPGS-D5700	53	SS205UYOWA/S530-A3/S290	144	
ELSW-J71C3-0CPGS-D6500	53	SS205UYWA/S530-A3/S290	144	
ELSW-J71C3-0CPHS-D5700	53	SS206SURWA/S530-A3/S290	144	
ELSW-J71C3-0CPHS-D6500	53	SS206UYWA/S530-A3/S290	144	
ELSW-J81C3-0CPGS-D5700	53	SS405SURWB/S530-A3/S290	144	
ELSW-J81C3-0CPGS-D6500	53	SS406SURWA/S530-A3/S290	145	
ELYU03-5070J4J6294310-N0	61	SS511SURWA/S530-A3/S290	145	
EZHV-F61M1-1LPHS-F3000	46	SS511SYGWA/S530-E2/S290	145	
EZHV-F81C1-1LPGS-F5700	46	SS512SURWA/S530-A3/S290	146	
EZHV-F81C1-1LPGS-F6500	46	SS512UBWA/C470/S290	146	
EZHV-J31M2-2LPHS-F2700	46	ST405SURWA/S530-A3/S290	148	
EZHV-J31M2-2LPHS-F3000	46	ST406SURWA/S530-A3/S290	148	
EZHV-K21M4-2LPHS-F3000	46	ST505SYGWA/S530-E2/S290	148	
EZHV-K51C4-2LPGS-F5700	46	ST511SYGWA/S530-E2/S290	149	
EZHV-K51C4-2LPGS-F6500	46	ST512SURWA/S530-A3/S290	149	
F415SURWA/S530-A3	142	ST512SYGWA/S530-E2/S290	149	
F416SURWA/S530-A3/S685	143	T315SYGWA/S530-E2	141	
F416SYGWA/S530-E3	143	T316SURWA/S530-A3	141	
F511SURWA/S530-A3	143	T316SYGWA/S530-E2	141	
F511SYGWA/S530-E2	143	T511SURWA/S530-A3	141	
F512SURWA/S530-A3	143	T511SYGWA/S530-E2	141	
F512SYGWA/S530-E2	143	T511UYOWA/S530-A3	141	
HN0325	155	T512SURWA/S530-A3	142	
M2881SURWA/S530-A3	151	T512SYGWA/S530-E2	142	
M2881SYGWA/S530-E2	151	T512UYOWA/S530-A3	142	
M2881UYWA/S530-A3	151			
M2882SYGWA/S530-E2	151			
S1006SURWA/S530-A3	136			
S2325SURWA/S530-A3	136			
S2326SURWA/S530-A3	136			
S2326SYGWA/S530-E2	136			
S2326UBWA/C470	136			
S2326USOWA/S530-A4	136			
S315SURWA/S530-A3	135			
S315SYGWA/S530-E2	135			

ALPHANUMERIC INDEX

INFRARED LED, SENSORS, COUPLERS

4N25	241	EL1010-G	240	EL431CA	247
4N26	241	EL1012-G	240	EL431CN	247
4N27	241	EL1013-G	240	EL431DA	247
4N28	241	EL1014-G	240	EL431DN	247
4N29	229	EL1017-G	240	EL4502	232
4N30	229	EL1018-G	240	EL4503	232
4N31	229	EL1019-G	240	EL452-G	228
4N32	229	EL1110-G	240	EL814	237
4N33	229	EL1112-G	240	EL815	228
4N35	241	EL1113-G	240	EL816	237
4N36	241	EL1114-G	240	EL817	237
4N37	241	EL1116-G	240	EL817-G	237
4N38	241	EL1117-G	240	EL825	229
6N135	232	EL1118-G	240	EL827	242
6N136	232	EL1119-G	240	EL851	237
6N137	233	EL205	242	EL852	228
6N138	233	EL206	242	ELD205	242
6N139	233	EL207	242	ELD206	242
ALS-PD70-01C/TR7	213	EL208	242	ELD207	242
ALS-PDIC144-6C/L378	210	EL211	242	ELD211	242
ALS-PDIC15-21B/TR8	212	EL212	242	ELD213	242
ALS-PDIC15-21C/L230/TR8	212	EL213	242	ELD217	242
ALS-PDIC17-55C/TR8	212	EL215	242	ELM3022	244
ALS-PDIC17-57B/TR8	215	EL216	242	ELM3023	244
ALS-PDIC17-77B/TR8	213	EL217	242	ELM3024	244
ALS-PDIC17-77C/TR8	213	EL2530	232	ELM3042	244
ALS-PDIC17-79NB/TR8	215	EL2531	232	ELM3043	244
ALS-PDIC243-3B	211	EL2601	233	ELM3044	244
ALS-PDIC243-3C	211	EL2611	233	ELM3052	244
ALS-PT17-51C/L177/TR8	214	EL2630	233	ELM3053	244
ALS-PT17-51NB/L369/TR8	214	EL2631	233	ELM3054	244
ALS-PT19-315C/L177/TR8	214	EL3010	246	ELM3062	244
ALS-PT204-6C/L177	210	EL3011	246	ELM3063	244
ALS-PT243-3C/L177	211	EL3012	246	ELM3064	244
APS-12D-1-02/TR8	216	EL3021	246	ELM3082	244
APS-16D25-11-DF8/TR8	216	EL3022	246	ELM3083	244
CLS15-22C/L213B/TR8	217	EL3023	246	ELM3084	244
CLS15-22C/L213G/TR8	217	EL3031	246	ELM452	230
CLS15-22C/L213R/TR8	217	EL3032	246	ELM453	230
CNY17-1	241	EL3033	246	ELM600	230
CNY17-2	241	EL3041	246	ELM601	230
CNY17-3	241	EL3042	246	ELM611	230
CNY17-4	241	EL3043	246	ELT3021	245
CNY17F-1	241	EL3051	246	ELT3022	245
CNY17F-2	241	EL3052	246	ELT3023	245
CNY17F-3	241	EL3053	246	ELT3041	245
CNY17F-4	241	EL3061	246	ELT3042	245
CNY64	238	EL3062	246	ELT3043	245
CNY65	238	EL3063	246	ELT3051	245
EL0452	231	EL3081	246	ELT3052	245
EL0453	231	EL3082	246	ELT3053	245
EL0500	231	EL3083	246	ELT3061	245
EL0501	231	EL354N-G	238	ELT3062	245
EL0530	231	EL357N-G	239	ELT3063	245
EL0531	231	EL3H4-G	239	ELT3081	245
EL0600	231	EL3H7-G	239	ELT3082	245
EL0601	231	EL431AA	247	ELT3083	245
EL0611	231	EL431AN	247	ELW135	234
EL0630	231	EL431BA	247	ELW136	234
EL0631	231	EL431BN	247	ELW137	234

ELW2601	234
ELW2611	234
ELW4503	234
H11A1	241
H11A2	241
H11A3	241
H11A4	241
H11A5	241
H11AA1	241
H11AA2	241
H11AA3	241
H11AA4	241
H11B1	229
H11B2	229
H11B255	229
H11B3	229
H11L1	236
HIR11-21C/L11/TR8	168
HIR12-21C/TR8	168
HIR17-21C/L289/TR8	169
HIR19-21C/L289/TR8	169
HIR204	162
HIR204/H0	162
HIR204C	162
HIR204C/H0	162
HIR234C	162
HIR25-21C/L423/TR8	170
HIR26-21B/L423/CT	170
HIR30-01C/S16	166
HIR323C	163
HIR323C/H0	163
HIR333/H0	163
HIR333C/H0	163
HIR36-01C/S32	166
HIR38-01C	166
HIR383C/L289	163
HIR42-21C/L290/TR8	172
HIR7373B/L289	164
HIR7373C	164
HIR7393B/L289	164
HIR7393C	164
HIR83-01B/TR8	172
HIR8323/C16	165
HIR89-01C/1R	173
HIR928-6C-F	167
IR11-21C/L302/TR8	168
IR11-21C/TR8	168
IR12-21C/TR8	168
IR15-21C/TR8	168
IR17-21C/TR8	169
IR19-21C/TR8	169
IR19-315C/TR8	169
IR204/H16/L10	162
IR204/H60	162
IR204-A	162
IR204C/H16/L10	162
IR204C-A	162
IR25-21C/TR8	170
IR26-21C/L110/TR8	170
IR26-51C/L110/TR8	170

IR26-61C/L302/TR8	171
IR26-71C/L302/TR8	171
IR323	163
IR323/H0-A	163
IR333/H0	163
IR333/H0/L10	163
IR333-A	163
IR333C	163
IR333C/H0/L10	163
IR333C/H2	163
IR383	163
IR42-21C/TR8	172
IR533C	164
IR7373C	164
IR7393C	164
IR8353-14C	165
IR908-7C-F	167
IR91-21C	173
IR91-21C/TR10	173
IR91-21C/TR7	173
IR928-6C-F	167
IR95-21C/TR7	173
IRM-3636M	187
IRM-3636M3	189
IRM-3636M-X	187
IRM-3636T	189
IRM-3636T-X	189
IRM-3638C	189
IRM-3638C-X	189
IRM-3638M	187
IRM-3638M2	189
IRM-3638M2-X	189
IRM-3638M3	189
IRM-3638M3-X	189
IRM-3638M-X	187
IRM-3638T	189
IRM-3638T-X	189
IRM-3640C	189
IRM-3640M2	189
IRM-3640M3	189
IRM-3640T	189
IRM-3640T-X	189
IRM-3656M	187
IRM-3656M3	189
IRM-3656M3-X	189
IRM-3656M-X	187
IRM-3656T	189
IRM-3736M	187
IRM-3736M3	195
IRM-3738M	187
IRM-3738M3	195
IRM-3738T	195
IRM-3740M2	195
IRM-3740T	195
IRM-3756M3	195
IRM-3756T	195
IRM-6638M3	189
IRM-6638T	189
IRM-6640M2	189
IRM-6738M3S47F61	195

IRM-8601M2	190
IRM-8601M2-2	190
IRM-8601M2-M	190
IRM-8602M2	190
IRM-8602M2-2	190
IRM-8607M2	191
IRM-8608M2	191
IRM-8609M2-4-M	191
IRM-8751M2	192
IRM-8752M2	192
IRM-8753M2	192
IRM-8755M2	193
IRM-8861M2	193
IRM-8871M2	193
IRM-8871M2-F72	194
IRM-8881M2	194
IRM-H236T/TR2	197
IRM-H238M3/TR2	197
IRM-H238T/TR2	197
IRM-H240M2/TR2	197
IRM-H536M/TR2	188
IRM-H538T/TR2	197
IRM-H636M/TR2	188
IRM-H636M3/TR2	197
IRM-H636T/TR2	197
IRM-H638M3/TR2	197
IRM-H638T/TR2	197
IRM-H656T/TR2	197
IRM-H936M3/TR2	196
IRM-H938M3/TR2	196
IRM-V536M/TR1	188
IRM-V538M3/TR1	196
IRM-V538T/TR1	196
IRM-V540M2/TR1	196
ITR20001/T	220
ITR20002	220
ITR20005-F	227
ITR20402	227
ITR20403	227
ITR20501	221
ITR20510/TR8	221
ITR20904	221
ITR8010	222
ITR8102	223
ITR8104	223
ITR8105	224
ITR8307	218
ITR8307/F43	218
ITR8307/L24	218
ITR8307/L24/F43	218
ITR8307/L24/TR8	218
ITR8307/TR8	218
ITR8402-F-A	224
ITR9606-F	224
ITR9608-F	225
ITR9702-F	225
ITR9707	225
ITR9803	226
ITR9809-F/T	226
ITR9813	226

CONDITIONS OF RoHS

INFRARED LED, SENSORS, COUPLERS

ITR9904	219	PT15-21B/TR8	183	
ITR9908	219	PT15-21C/TR8	183	
ITR9909	219	PT17-21B/L41/TR8	184	
MCT2E	241	PT17-21C/L41/TR8	184	
PD12-21B/L458/TR8	176	PT19-21B/L41/TR8	184	
PD15-21B/TR8	176	PT19-21C/L41/TR8	184	
PD15-22C/L1/TR8	176	PT204-6B	179	
PD204-6B	174	PT204-6C	179	
PD204-6C/L3	174	PT2559B/L2/H2-F	182	
PD333-3B/H0/L2	174	PT2559B/L2-F	182	
PD333-3C/H0/L2	174	PT2559B-F	182	
PD42-21B/TR8	177	PT26-21B/TR8	184	
PD42-21C/TR8	177	PT26-21C/TR8	184	
PD438B	175	PT26-51B/TR8	185	
PD438B/L1	175	PT333-3B	180	
PD438B/S46	175	PT333-3C	179	
PD438C	175	PT334-6B	180	
PD438C/S46	175	PT334-6C	180	
PD638B	175	PT42-21B/TR8	185	
PD70-01B/TR10	178	PT534-6B	181	
PD70-01B/TR7	177	PT5529B/L2/H2-F	182	
PD70-01C/TR10	178	PT5529B/L2-F	182	
PD70-01C/TR7	177	PT67-21B/C14/TR8	185	
PD95-21B/TR10	178	PT67-21C/L41/TR8	186	
PLR135	198	PT908-7B-F	182	
PLR135/T	200	PT908-7C-F	182	
PLR135/T1	200	PT91-21B	186	
PLR135/T10	203	PT91-21B/TR10	186	
PLR135/T2	200	PT91-21B/TR7	186	
PLR135/T5A	201	PT91-21B/TR9	186	
PLR135/T5P	201	PT91-21C	186	
PLR135/T6	201	PT91-21C/TR10	186	
PLR135/T7	202	PT91-21C/TR7	186	
PLR135/T8	202	PT928-6B-F	182	
PLR135/T9	203	PT928-6C-F	182	
PLR137	198	SIR12-21C/TR8	168	
PLR155	198	SIR19-21C/TR8	169	
PLR233	199	SIR19-315/TR8	169	
PLR253	199	SIR204-A	162	
PLT132	204	SIR204C	162	
PLT133	204	SIR234	162	
PLT133/T	206	SIR323-5	163	
PLT133/T1	206	SIR333-A	163	
PLT133/T1	206	SIR383C	163	
PLT133/T10W	209	SIR928-6C-F	167	
PLT133/T5A	207	TIL111	241	
PLT133/T5P	207	TIL113	229	
PLT133/T6	207	TIL117	241	
PLT133/T6A	208			
PLT133/T7	208			
PLT133/T8	208			
PLT133/T9	209			
PLT137	205			
PLT232/L5	205			
PLT237	205			
PLT262	204			
PT11-21C/L41/TR8	183			
PT12-21B/TR8	183			
PT12-21C/TR8	183			
PT1504-6B	181			

CONDITIONS OF RoHS

From July 1st, 2006, RoHS requires that all electrical equipment should not contain lead, mercury, cadmium, hexavalent chromium, polybrominated biphenyls (PBBs) or poly brominated diphenyl ethers (PBDEs), and the elements are restricted to certain amount (such as mercury in a wound lighting tube <5 mg, lead in CRT glass, soldering tin, etc.). Before the date every member of European Union must obey of environment on chemical regulation.



- According to RoHS part, the norm of restrict and limit used substance adopted by EVERLIGHT.

Name	Description	Criteria
Cadmium	Cadmium and its compounds must not be present in parts, components, materials or products. Cadmium and its compounds must not be used as stabilizers, coloring agent or as a surface coating treatment in parts, components, materials or products.	< 5 ppm (Plastics) < 75 ppm (Metals)
Lead restrictions	Lead and/or lead compounds shall not be present in hardware components or parts, however, except solder, electrical components and interconnect materials. Lead carbonates and sulfates must not be used in any paint applied to parts, component, or products.	< 100 ppm (Plastics) < 1000 ppm (Others)
Mercury restrictions	Mercury must not be contained in any part, material, components or product, including, but not limited to switches, relays or electrical contacts. This restriction does not apply to lamps with less than 10 mg if mercury.	< 5 ppm
Hexavalent chromium (chromium VI) and hexavalent chromium compounds	Hexavalent chromium (chromium VI) and hexavalent chromium compounds must not be present in parts, components, materials or products.	< 2 ppm
Polybrominated Biphenyls (PBBs)	Plastics parts, components, materials and products must not contain Polybrominated Biphenyls as flame retardants, specific PBBs, but are not limited to those listed in attachment item.	< 5 ppm
Polybrominated Diphenyl Ethers (PBDEs)	Plastic parts, components, materials and products must not contain Polybrominated Diphenyl Ethers, known as flame retardants, specific PBBEs, including, but are not limited to, those listed in attachment item.	< 5 ppm

Compliant with the following condition :

- RoHS for SGS report.

Div	Product P/N & Type	Catagory	RoHS & SGS report file
Visible Product Group	High Power LED	High Power LED	ELSH, ELSW, ELSWD, HV, A22, B05 Series
	SMD For Lead Frame Type	SMD A	SMD A TYPE
	SMD For PCB Type	SMD B	SMD B TYPE
	SMD For Reflector Type	SMD C	SMD C TYPE
	Lead Lamp / Super Bright Lamp LED	Lamp	Lamp Lead Frame – Iron
	Super Bright Lamp LED Outdoor Application Super Oval Type	Lamp	Lamp Lead Frame – Copper
	Super Flux LED (Power LED)	Lamp	Super Flux LED (Power LED) Series
	LED Assembly / Lamp Injection-Assembly	Array	Array Series
	Digit Display / Dot Matrix Display	Display	Display Series
	SMD Display	SMD-Display	SMD-Display
Infrared Product Group	Lamp Infrared Emitting Diode Lamp Photo Transistor / Lamp Photo Diode	IR, PT, PD, 2PT	Lamp Series
	Side Looking Phototransistor Side Looking Dual Phototransistor Side Looking Infrared Emitting Diode	IR, PT, PD, 2PT	Side Looking Series
	SMD For Lead Frame Type	IR/PT/PD	SMD A TYPE
	SMD For PCB Type	IR/PT/PD	SMD B TYPE
	SMD For Reflector Type	IR/PT/PD	SMD C TYPE
	Transmissive ITR without Line	ITR	Transmissive ITR without Line Series
	Reflective ITR	ITR	ITR8307
	IRM SMD Type	IRM	IRM-2XXX, 3XXX Series
	IRM DIP Type	IRM	IRM-VXXX, HXXX Series
	IRM 8XXX-P Series	IRM	IRM-8XXX-P Series
Integrated Circuit Application	EL-81X Series	Photo Coupler	EL-817
Communication Product Group	PLT Series	Photo Link	PLT Series
	PLR Series	Photo Link	PLR Series
Ambient Light Sensor Group	Lamp Ambient Light Sensor SMD Ambient Light Sensor	ALS	ALS Lamp Series ALS SMD Series

APPLICATION NOTICE

Since we are continuously improving all of our products, the information listed in this Catalogue, which includes specifications, characteristics, data, materials used, structure, etc., are subject to change without prior notice. It is necessary that you request the newest specification sheet from EVERLIGHT when you place any inquiry or purchase order.

Please carefully read the specification sheet, and confirm your acceptance of the content. EVERLIGHT does not accept any liabilities for damages occurred due to the customer's lack of confirming the newest product specification.

It is important to strictly follow the maximum limit and other important instructions listed on the specifications sheet when using EVERLIGHT's products. The following is a list of special notes for products used in specific applications. It is recommended that customers read the instructions carefully before installing the products. Again, EVERLIGHT does not accept any liabilities for any improper use of EVERLIGHT's product or failure to follow the instructions listed herein:

Special Instruction:

1. Products listed in this Catalogue are designed primarily for the application listed below:
A : Calculators
B : Measurement equipment
C : AV machines
D : QA machines
E : Operating machines
F : Consumer electronics
G : Telecommunications

While products meet the application listed above, additional attention is required when products are to be utilized in the instruments listed under Special Instruction Notes 2 and 3.

2. When high reliability and safety concerns are required, it is very important that the design be made to focus on safety and long term reliability. Special care should be given to assure that EVERLIGHT's products integrate and function properly with all other parts of the instrument. Instruments fall into these categories include:

- A : Instruments attached to transportation tools
(aircraft, train, automobile)
- B : Traffic signs
- C : Gas leaking detectors and gas shutters
- D : Fire detectors
- E : Other safety detectors

3. When extremely high reliability and safety concerns are required, it is necessary that you contact EVERLIGHT for additional information before use. Instruments fall into these categories include:

- A : Aerospace instruments
- B : Telecommunication tools (main line)
- C : Nuclear weapon controls
- D : Medical instruments

4. Should you have any additional questions, please contact EVERLIGHT for details.

本資料所記載之製品的規格、特性、DATA、使用原料、構造...等，有時為了改良製品，無法事前通知，而逕行與予變更。因此請務必使用最新的規格書，並請針對內容加以確認。若因未確認規格書，導致使用次製品之機器或其他應用產品發生瑕疵時，敝公司將不負此責任。

使用本資料所記載之製品時，請遵守規格書所記載之絕對最大定格、使用上之注意事項，以及下列之注意點，若因不遵守規格書所記載之絕對最大定格、使用上之注意事項，以及下述之注意點，而導致發生損害問題時，敝公司將不負此責任。

注意項目：

1. 本資料所記載之製品，原則上是為了下述之用途而製造出來的產品
A: 電算機
B: OA機器
C: 通信機器
D: 計測機器
E: 工作機器
F: AV機器
G: 家電製品

若雖合乎上述用途，但是屬於下述2或3所記載之機器時，則需遵守個別產品之使用注意事項。

2. 若本資料所記載之製品用於下述講求高信賴性與安全性之用途時，因牽涉到機能與精度方面，為了維持這類機器的信賴性與安全性，請務必注重安全設計與長期性設計，並且需考慮整體機構間的關係，依機器整體之安全設計來使用。
A: 運送機器(飛機、火車、汽車)與控制安全性等相關之產品
B: 交通信號機
C: 瓦斯漏氣檢測關閉機
D: 防災裝置
E: 各種安全裝置
3. 若本資料所記載之製品用於下述講求高信賴性與安全性之用途時，因牽涉到機能與精度方面，請事先與敝公司聯絡。
A: 太空機器(航太儀器)
B: 通信機器(幹線)
C: 原子彈控制機器
D: 醫療機器
4. 涉及上述注意事項之任何一項時，如有疑問，請和敝公司業務人員聯絡。

TECHNICAL DATA

HIGH POWER LED (SHUEN 炫, SHWO 爍, SHWO (D) 爍 (D), HV, COB, A22, A30, B05)
CIE BINNING RANKS

White Color


Cool-White Bin Coordinates

5000K				
Bin	50K-1	50K-2	50K-3	50K-4
Reference Range	4745~5000K	5000~5310K	4745~5000K	5000~5310K
CIE X	0.346	0.338	0.337	0.345
	0.345	0.337	0.337	0.344
	0.353	0.345	0.344	0.352
	0.355	0.346	0.345	0.353
CIE Y	0.369	0.362	0.349	0.356
	0.356	0.349	0.337	0.343
	0.362	0.356	0.343	0.349
	0.376	0.369	0.356	0.362

5700K				
Bin	57K-1	57K-2	57K-3	57K-4
Reference Range	5310~5700K	5700~6020K	5700~6020K	5310~5700K
CIE X	0.329	0.321	0.321	0.329
	0.329	0.321	0.322	0.329
	0.337	0.329	0.329	0.337
	0.338	0.329	0.329	0.337
CIE Y	0.354	0.346	0.335	0.342
	0.342	0.335	0.324	0.331
	0.349	0.342	0.331	0.337
	0.362	0.354	0.342	0.349

6500K				
Bin	65K-1	65K-2	65K-3	65K-4
Reference Range	6020~6500K	6500~7050K	6500~7050K	6020~6500K
CIE X	0.312	0.303	0.305	0.313
	0.313	0.305	0.307	0.315
	0.321	0.313	0.315	0.322
	0.321	0.312	0.313	0.321
CIE Y	0.339	0.330	0.321	0.329
	0.329	0.321	0.311	0.319
	0.337	0.329	0.319	0.326
	0.348	0.339	0.329	0.337

White Color Bin Structure

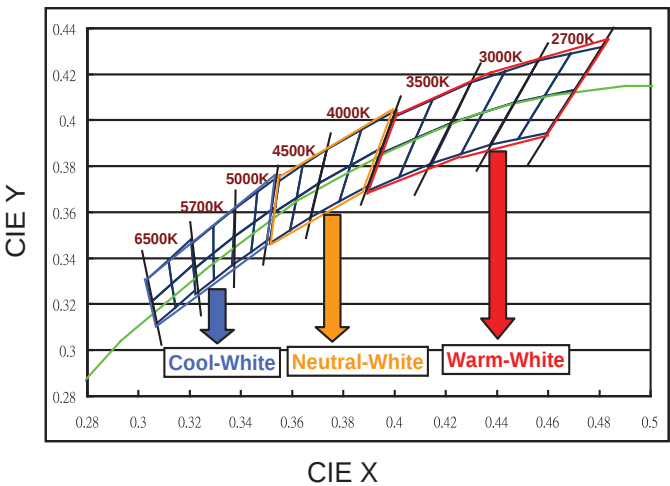

Chromaticity specification defined by ANSI

Natural-White Bin Coordinates

4000K				
Bin	40K-1	40K-2	40K-3	40K-4
Reference Range	3710~4000K	4000~4260K	4000~4260K	3710~4000K
CIE X	0.387	0.374	0.370	0.383
	0.383	0.370	0.367	0.378
	0.395	0.383	0.378	0.390
	0.401	0.387	0.383	0.395
CIE Y	0.396	0.387	0.373	0.380
	0.380	0.373	0.358	0.365
	0.388	0.380	0.365	0.372
	0.404	0.396	0.380	0.388

4500K				
Bin	45K-1	45K-2	45K-3	45K-4
Reference Range	4260~4500K	4500~4745K	4500~4745K	4260~4500K
CIE X	0.364	0.355	0.353	0.362
	0.362	0.353	0.351	0.359
	0.370	0.362	0.359	0.367
	0.374	0.364	0.362	0.370
CIE Y	0.381	0.374	0.360	0.366
	0.366	0.360	0.347	0.352
	0.373	0.366	0.352	0.358
	0.387	0.381	0.366	0.373

Warm-White Bin Coordinates

2700K				
Bin	27K-1	27K-2	27K-3	27K-4
Reference Range	2580~2700K	2700~2870K	2700~2870K	2580~2700K
CIE X	0.469	0.456	0.447	0.459
	0.459	0.447	0.437	0.448
	0.470	0.459	0.448	0.459
	0.481	0.469	0.459	0.470
CIE Y	0.429	0.426	0.408	0.410
	0.410	0.408	0.389	0.392
	0.413	0.410	0.392	0.394
	0.432	0.429	0.410	0.413

3000K				
Bin	30K-1	30K-2	30K-3	30K-4
Reference Range	2870~3000K	3000~3220K	3000~3220K	2870~3000K
CIE X	0.443	0.430	0.422	0.435
	0.435	0.422	0.415	0.426
	0.447	0.435	0.426	0.437
	0.456	0.443	0.435	0.447
CIE Y	0.421	0.417	0.399	0.403
	0.403	0.399	0.381	0.385
	0.408	0.403	0.385	0.389
	0.426	0.421	0.403	0.408

3500K				
Bin	35K-1	35K-2	35K-3	35K-4
Reference Range	3220~3500K	3500~3710K	3500~3710K	3220~3500K
CIE X	0.415	0.400	0.394	0.408
	0.408	0.394	0.389	0.402
	0.422	0.408	0.402	0.415
	0.430	0.415	0.408	0.422
CIE Y	0.409	0.402	0.385	0.392
	0.392	0.385	0.369	0.375
	0.399	0.392	0.375	0.381
	0.417	0.409	0.392	0.399

TECHNICAL DATA

HIGH POWER LED (SHUEN炫, SHWO爍, SHWO(D)爍(D), HV, COB, A22 , A30, B05)
BRIGHTNESS BINNING RANKS

Shuen, Shwo, Shwo (D), HV
Brightness (lm)
Luminous Flux Bins

Group	Binning	Minimum Photometric Flux (lm)	Maximum Photometric Flux (lm)
E	1	4	5
	2	5	6
	3	6	8
	4	8	10
	5	10	13
	6	13	17
	7	17	20
	8	20	23
	9	23	27
F	1	27	33
	2	33	39
	3	39	45
	4	45	52
	5	52	60
	6	60	70
	7	70	80
	8	80	90
	9	90	100
J	1	100	110
	2	110	120
	3	120	130
	4	130	140
	5	140	150
	6	150	160
	7	160	180
	8	180	200
	9	200	225
K	1	225	250
	2	250	275
	3	275	300
	4	300	325
	5	325	350
	6	350	375
	7	375	400
	8	400	425
	9	425	450
N	1	450	475
	2	475	500
	3	500	525
	4	525	550

Shuen, Shwo
Wavelength (nm)

Group	Binning	Minimum Dominant Wavelength (nm)	Maximum Dominant Wavelength (nm)
B Blue/Royal-Blue	1	430	435
	2	435	440
	3	440	445
	4	445	450
	5	450	455
	6	455	460
	7	460	465
	8	465	470
G Green	1	520	525
	2	525	530
	3	530	535
	4	535	540
	5	540	545
	6	545	550
A Amber	1	580	582.5
	2	582.5	585
	3	585	587.5
	4	587.5	590
	5	590	592.5
R Red	6	592.5	595
	3	610	615
	4	615	620
	5	620	625
	6	625	630
	7	630	635
	1	635	640
D Deep-Red	2	640	645
	3	645	650
	4	650	655
	5	655	660
	6	660	665
	7	665	670
	8	670	675
	1	700	710
F Far-Red	2	710	715
	3	715	720
	4	720	725
	5	725	730
	6	730	735
	7	735	740
	8	740	745

COB
Brightness (lm)
Luminous Flux Bins

Group	Binning	Minimum Photometric Flux (lm)	Maximum Photometric Flux (lm)
E	1	4	5
	2	5	6
	3	6	8
	4	8	10
	5	10	13
	6	13	17
	7	17	20
	8	20	23
	9	23	27
F	1	27	33
	2	33	39
	3	39	45
	4	45	52
	5	52	60
	6	60	70
	7	70	80
	8	80	90
	9	90	100
J	1	100	110
	2	110	120
	3	120	130
	4	130	140
	5	140	150
	6	150	160
	7	160	180
	8	180	200
	9	200	225
K	1	225	250
	2	250	275
	3	275	300
	4	300	325
	5	325	350
	6	350	375
	7	375	400
	8	400	425
	9	425	450
N	1	450	475
	2	475	500
	3	500	550
	4	550	600
	5	600	650
	6	650	700
	7	700	750
	8	750	800
	1	800	900
P	2	900	1000
	3	1000	1100
	4	1100	1200
	5	1200	1300
	6	1300	1400
	1	1400	1600
S	2	1600	1800
	3	1800	2000
	4	2000	2200
	5	2200	2400

A22, A30, B05
Brightness (lm)
Luminous Flux Bins

Group	Binning	Minimum Photometric Flux (lm)	Maximum Photometric Flux (lm)
E	1	1.5	3
	2	3	4
	3	4	5
	4	5	6
	5	6	8
F	1	8	10
	2	10	13
	3	13	17
	4	17	20
	5	20	23
J	1	23	27
	2	27	33
	3	33	39
	4	39	45
	5	45	52
K	1	52	60
	2	60	70
	31	70	75
	32	75	80
	33	80	85
	41	85	90
	42	90	95
	43	95	100
	51	100	110
	52	110	120
	53	120	130
	11	130	140
N	12	140	150
	13	150	160
	21	160	180
	22	180	200
	31	200	225
	32	225	250
	41	250	275
	42	275	300
	51	300	350
	52	350	400
	11	400	450
	12	450	500
R	21	500	550
	22	550	600
	31	600	650
	32	650	700
	33	700	750
	4	750	1000
	5	1000	1300

HIGH POWER LED (SHUEN炫, SHWO爍, SHWO(D)爍(D), HV, COB, A22 , A30, B05) FORWARD VOLTAGE BINNING RANKS

Shuen & Shwo Forward Voltage Bins

Group Name	Bins	
A	U1+U2+U3	
B	U2+U3+U4	
C	V1+V2+V3	
D	V2+V3+V4	
E	V3+V4+V5	
F	V1+V2	
G	V1	
Bin	Minimum Forward Voltage (V)	Maximum Forward Voltage (V)
U1	1.75	2.05
U2	2.05	2.35
U3	2.35	2.65
U4	2.65	2.95
V1	2.95	3.25
V2	3.25	3.55
V3	3.55	3.85
V4	3.85	4.15
V5	4.15	4.45

Shwo (D) Forward Voltage Bins

Group Name	Bins	
A	U1+U2+U3+U4	
B	U2+U3+U4+V1	
C	V1+V2+V3	
D	V1+V2+V3+V4	
Bin	Minimum Forward Voltage (V)	Maximum Forward Voltage (V)
U1	1.75	2.05
U2	2.05	2.35
U3	2.35	2.65
U4	2.65	2.95
V1	2.95	3.25
V2	3.25	3.55
V3	3.55	3.85
V4	3.85	4.15

A22 (0.5W) Forward Voltage Bins

Bin	Minimum Forward Voltage (V)	Maximum Forward Voltage (V)
V1	2.95	3.25
V2	3.25	3.55
V3	3.55	3.85
V4	3.85	4.15

A22 (1W), A30 Forward Voltage Bins

Bin	Minimum Forward Voltage (V)	Maximum Forward Voltage (V)
VD	13.5	14.7
VE	14.7	15.9
VF	VF-1	15.9
	VF-2	16.2
	VF-3	16.5
	VF-4	16.8
VG	VG-1	16.8
	VG-2	17.1
	VG-3	17.4
	VG-4	17.7

B05 Forward Voltage Bins

Bin	Minimum Forward Voltage (V)	Maximum Forward Voltage (V)
O1	4.5	5.0
O2	5.0	5.5
O3	5.5	6.0
O4	6.0	6.5
O5	6.5	7.0
O6	7.0	7.5
O7	7.5	8.0
R1	8.0	9.0
R2	9.0	10.0
R3	10.0	11.0
R4	11.0	12.0

TECHNICAL DATA

HIGH POWER LED (HV, COB SERIES) FORWARD VOLTAGE BINNING RANKS

HV (1W)

Forward Voltage Bins For 110V

Group Name	Bins
A	A3+A4
B	A4+A5
C	A5+A6
D	A3+A4+A5
E	A4+A5+A6
F	A3+A4+A5+A6

Bin	Production Line	
	Minimum Voltage (V)	Maximum Voltage (V)
A1	43	45
A2	45	47
A3	47	49
A4	49	51
A5	51	53
A6	53	55
A7	55	57
A8	57	59
A9	59	61

HV (2W, 4W)

Forward Voltage Bins For 110V

Group Name	Bins
A	B3+B4
B	B4+B5
C	B5+B6
D	B3+B4+B5
E	B4+B5+B6
F	B3+B4+B5+B6

Bin	Production Line	
	Minimum Voltage (V)	Maximum Voltage (V)
B1	87	91
B2	91	95
B3	95	99
B4	99	103
B5	103	107
B6	107	111
B7	111	115
B8	115	119
B9	119	123

COB (6.4W, 8W, 12W)

Forward Voltage Bins

Group Name	Bins	
A	T1+T2+T3	
B	T2+T3+T4	
C	T4+T5+T6	
D	T5+T6+T7	
Bin	Production Line	
	Minimum Voltage (V)	Maximum Voltage (V)
T1	15.0	16.5
T2	16.5	18.0
T3	18.0	19.5
T4	19.5	21.0
T5	21.0	22.5
T6	22.5	24.0
T7	24.0	24.5

HIGH POWER LED (EHP-A09K) BINNING RANKS

Color Bins

Group	Bin	Minimum Dominant Wavelength (nm)	Maximum Dominant Wavelength (nm)	Condition
Red	1	616	619	$I_F = 150\text{mA}$
	2	619	622	
	3	622	625	
	4	625	628	
Yellow	1	583	586	
	2	586	589	
	3	589	592	
	4	592	595	
Green	1	516	519	
	2	519	522	
	3	522	525	
	4	525	528	
Blue	1	448	451	
	2	451	454	
	3	454	457	
	4	457	460	
	5	460	464	
	6	464	467	

Bin Range of Forward Voltage

Group	Min.	Max.	Unit	Condition
1	1.70	1.85	V	$I_F = 150\text{mA}$
2	1.85	2.00		
3	2.00	2.15		
4	2.15	2.30		
5	2.30	2.45		
6	2.45	2.60		
7	2.60	2.75		
8	2.75	2.90		
9	2.90	3.05		
10	3.05	3.20		
11	3.20	3.35		
12	3.35	3.50		
13	3.50	3.65		
14	3.65	3.80		
15	3.80	3.95		
16	3.95	4.10		
17	4.10	4.25		

Bin Code of Luminous Intensity

Group	Min.	Max.	Unit	Condition
V2	900	1120	V	$I_F = 150\text{mA}$
AA	1120	1400		
AB	1400	1800		
BA	1800	2240		
BB	2240	2800		
CA	2800	3550		
CB	3550	4500		
DA	4500	5600		
DB	5600	7100		
EA	7100	9000		

Note:

1. The standard shipping format for serial types includes a family bin of 3 individual brightness bins. Individual brightness bins cannot be ordered.
2. Only one bin will be shipped on each reel (there will be no mixing of two bins on each reel).

Cool White & Warm White Bin Code of Luminous Intensity

Group	Min.	Max.	Unit	Condition
CB	3550	4500	mcd	$I_F = 150\text{mA}$
DA	4500	5600		
DB	5600	7100		
EA	7100	9000		

Note:

1. The standard shipping format for serial types includes a family bin of 3 individual brightness bins. Individual brightness bins cannot be ordered.
2. Only one bin will be shipped on each reel (there will be no mixing of two bin on each reel).

TECHNICAL DATA

HIGH POWER LED (EHP-A09K) CIE BINNING RANKS

Cool White (Production Spec)

4500~5000K

Rank	CIE_x	CIE_y	Rank	CIE_x	CIE_y	Condition
U4	0.364	0.383	U7	0.344	0.344	I _F = 150mA
	0.367	0.400		0.343	0.331	
	0.348	0.385		0.357	0.343	
	0.347	0.372		0.360	0.357	
U5	0.364	0.383	U8	0.342	0.320	
	0.362	0.372		0.343	0.331	
	0.346	0.359		0.357	0.343	
	0.347	0.372		0.355	0.330	
U6	0.362	0.372	U9	0.342	0.320	
	0.360	0.357		0.355	0.330	
	0.344	0.344		0.353	0.315	
	0.346	0.359		0.341	0.305	

4500~5000K

Rank	CIE_x	CIE_y	Rank	CIE_x	CIE_y	Condition
V4	0.329	0.357	V7	0.329	0.331	I _F = 150mA
	0.329	0.369		0.344	0.344	
	0.348	0.385		0.343	0.331	
	0.347	0.372		0.329	0.320	
V5	0.329	0.345	V8	0.343	0.331	
	0.329	0.357		0.329	0.320	
	0.347	0.372		0.329	0.310	
	0.346	0.359		0.342	0.320	
V6	0.329	0.331	V9	0.329	0.310	
	0.329	0.345		0.342	0.320	
	0.346	0.359		0.341	0.305	
	0.344	0.344		0.330	0.300	

5650~6300K

Rank	CIE_x	CIE_y	Rank	CIE_x	CIE_y	Condition
W4	0.329	0.369	W7	0.329	0.331	I _F = 150mA
	0.329	0.357		0.329	0.320	
	0.315	0.344		0.318	0.310	
	0.314	0.355		0.317	0.320	
W5	0.329	0.345	W8	0.329	0.321	
	0.316	0.333		0.329	0.310	
	0.315	0.344		0.319	0.300	
	0.329	0.357		0.318	0.310	
W6	0.329	0.345	W9	0.321	0.290	
	0.329	0.331		0.330	0.300	
	0.317	0.320		0.329	0.310	
	0.316	0.333		0.319	0.300	

6300~7000K

Rank	CIE_x	CIE_y	Rank	CIE_x	CIE_y	Condition
X4	0.301	0.342	X7	0.308	0.311	I _F = 150mA
	0.314	0.355		0.317	0.320	
	0.315	0.344		0.319	0.300	
	0.303	0.333		0.311	0.293	
X5	0.305	0.322	X8	0.321	0.290	
	0.303	0.333		0.319	0.300	
	0.315	0.344		0.311	0.293	
	0.316	0.333		0.313	0.285	
X6	0.308	0.311				
	0.305	0.322				
	0.316	0.333				
	0.317	0.320				

7000~8000K

Rank	CIE_x	CIE_y	Rank	CIE_x	CIE_y	Condition
Y3-3	0.290	0.318	Y9-3	0.308	0.311	I _F = 150mA
	0.303	0.333		0.311	0.293	
	0.301	0.342		0.290	0.270	
	0.286	0.333		0.283	0.284	
Y6-3	0.308	0.311	Y1-3	0.302	0.283	
	0.283	0.284		0.311	0.293	
	0.274	0.301		0.313	0.285	
	0.303	0.333		0.305	0.273	

8000~9000K


Rank	CIE_x	CIE_y	Rank	CIE_x	CIE_y	Condition
Y3-2	0.281	0.309	Y9-2	0.308	0.311	I _F = 150mA
	0.290	0.318		0.283	0.284	
	0.286	0.333		0.274	0.301	
	0.276	0.321		0.303	0.333	
Y6-2	0.302	0.283	Y1-2	0.299	0.265	
	0.311	0.293		0.295	0.276	
	0.313	0.285		0.302	0.283	
	0.305	0.273		0.305	0.273	

9000~10000K

Rank	CIE_x	CIE_y	Rank	CIE_x	CIE_y	Condition
Y3-1	0.274	0.301	Y9-1	0.290	0.270	I _F = 150mA
	0.281	0.309		0.283	0.284	
	0.276	0.321		0.289	0.291	
	0.269	0.309		0.295	0.276	
Y6-1	0.283	0.284	Y1-1	0.295	0.276	
	0.274	0.301		0.299	0.265	
	0.281	0.309		0.295	0.259	
	0.289	0.291		0.290	0.270	

10000~14000K

Rank	CIE_x	CIE_y	Rank	CIE_x	CIE_y	Condition
S3-1	0.259	0.270	S9-1	0.270	0.260	I _F = 150mA
	0.274	0.301		0.283	0.284	
	0.269	0.309		0.290	0.270	
	0.251	0.280		0.280	0.248	
S6-1	0.274	0.301	S1-1	0.280	0.248	
	0.283	0.284		0.290	0.270	
	0.270	0.260		0.295	0.259	
	0.259	0.270		0.286	0.240	

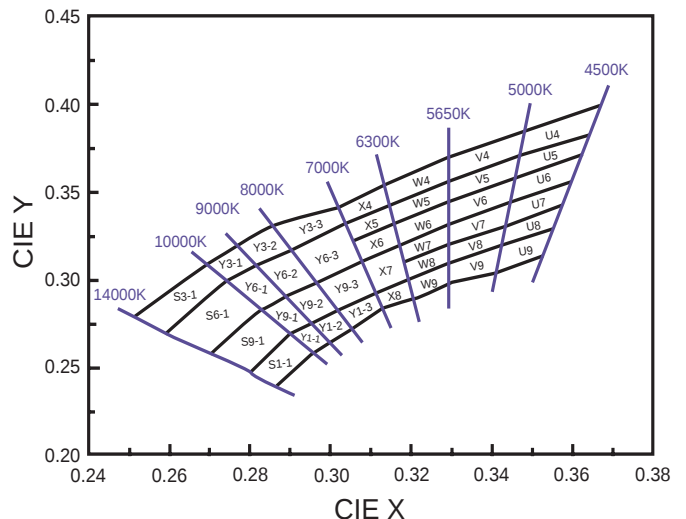

Warm White (Production Spec)

2760~2850K

Rank	CIE_x	CIE_y	Rank	CIE_x	CIE_y	Condition
M4	0.471	0.451	M7	0.444	0.399	I _F = 150mA
	0.487	0.454		0.458	0.403	
	0.477	0.437		0.449	0.388	
	0.461	0.433		0.436	0.384	
M5	0.461	0.433	M8	0.423	0.358	
	0.477	0.437		0.435	0.383	
	0.467	0.420		0.449	0.388	
	0.453	0.416		0.434	0.359	
M6	0.453	0.416	M9	0.411	0.334	
	0.467	0.420		0.423	0.358	
	0.458	0.403		0.434	0.359	
	0.444	0.399		0.421	0.334	

2850~3050K

Rank	CIE_x	CIE_y	Rank	CIE_x	CIE_y	Condition
N4	0.454	0.446	N7	0.429	0.394	I _F = 150mA
	0.471	0.451		0.444	0.399	
	0.461	0.433		0.436	0.384	
	0.446	0.429		0.422	0.379	
N5	0.446	0.429	N8	0.412	0.356	
	0.461	0.433		0.422	0.379	
	0.453	0.416		0.435	0.383	
	0.438	0.412		0.423	0.358	
N6	0.438	0.412	N9	0.402	0.334	
	0.453	0.416		0.412	0.356	
	0.444	0.399		0.423	0.358	
	0.429	0.394		0.411	0.334	

3050~3250K

Rank	CIE_x	CIE_y	Rank	CIE_x	CIE_y	Condition
P4	0.438	0.440	P7	0.416	0.389	I _F = 150mA
	0.454	0.446		0.429	0.394	
	0.446	0.429		0.422	0.379	
	0.431	0.423		0.410	0.374	
P5	0.431	0.423	P8	0.401	0.353	
	0.446	0.429		0.410	0.373	
	0.438	0.412		0.422	0.379	
	0.424	0.406		0.412	0.356	
P6	0.424	0.406	P9	0.393	0.333	
	0.438	0.412		0.401	0.353	
	0.429	0.394		0.412	0.356	
	0.416	0.389		0.402	0.334	

3250~3500K

Rank	CIE_x	CIE_y	Rank	CIE_x	CIE_y	Condition
Q4	0.421	0.433	Q7	0.402	0.382	I _F = 150mA
	0.438	0.440		0.416	0.389	
	0.431	0.423		0.410	0.374	
	0.415	0.416		0.397	0.367	
Q5	0.415	0.416	Q8	0.390	0.349	
	0.431	0.423		0.396	0.367	
	0.424	0.406		0.410	0.373	
	0.409	0.400		0.401	0.353	
Q6	0.409	0.400	Q9	0.384	0.331	
	0.424	0.406		0.390	0.349	
	0.416	0.389		0.401	0.353	
	0.402	0.382		0.393	0.333	

3500~3800K


Rank	CIE_x	CIE_y	Rank	CIE_x	CIE_y	Condition
R4	0.402	0.423	R7	0.387	0.374	I _F = 150mA
	0.421	0.433		0.402	0.382	
	0.415	0.416		0.397	0.367	
	0.396	0.404		0.383	0.360	
R5	0.396	0.404	R8	0.378	0.343	
	0.415	0.416		0.382	0.359	
	0.409	0.400		0.396	0.367	
	0.392	0.391		0.390	0.349	
R6	0.392	0.391	R9	0.373	0.327	
	0.409	0.400		0.378	0.343	
	0.402	0.382		0.390	0.349	
	0.387	0.374		0.384	0.331	

3800~4100K

Rank	CIE_x	CIE_y	Rank	CIE_x	CIE_y	Condition
S4	0.386	0.413	S7	0.374	0.366	I _F = 150mA
	0.402	0.423		0.387	0.374	
	0.396	0.404		0.383	0.360	
	0.381	0.394		0.371	0.352	
S5	0.381	0.394	S8	0.368	0.337	
	0.396	0.404		0.370	0.351	
	0.392	0.391		0.382	0.359	
	0.378	0.382		0.378	0.343	
S6	0.378	0.382	S9	0.364	0.322	
	0.392	0.391		0.368	0.337	
	0.387	0.374		0.378	0.343	
	0.374	0.366		0.373	0.327	

4100~4500K

Rank	CIE_x	CIE_y	Rank	CIE_x	CIE_y	Condition
T4	0.367	0.400	T7	0.359	0.356	I _F = 150mA
	0.386	0.413		0.374	0.366	
	0.381	0.394		0.371	0.352	
	0.364	0.383		0.357	0.343	
T5	0.364	0.383	T8	0.355	0.330	
	0.381	0.394		0.357	0.343	
	0.378	0.382		0.370	0.351	
	0.362	0.372		0.368	0.337	
T6	0.362	0.372	T9	0.353	0.315	
	0.378	0.382		0.355	0.330	
	0.374	0.366		0.368	0.337	
	0.359	0.356		0.364	0.322	

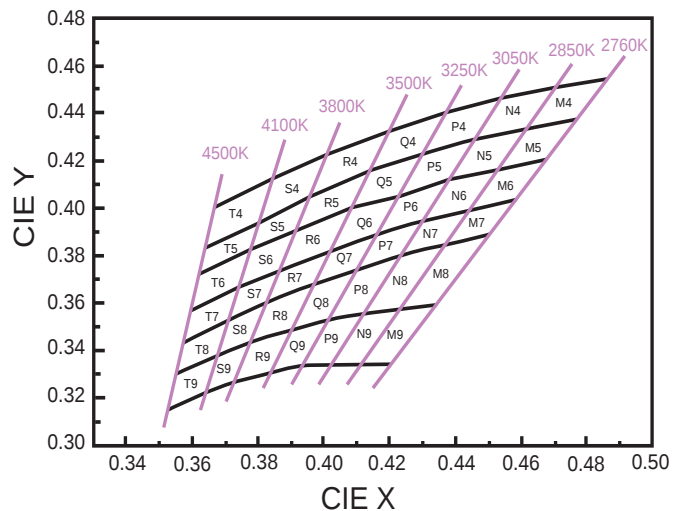

TECHNICAL DATA

For Lighting Application Only

MIDDLE POWER LED - SMD TYPE (62 SERIES / 5630 PACKAGE) CIE BINNING RANKS

White Color Bin Coordinates

6500K				
Bin	65K-1	65K-2	65K-3	65K-4
CIE X	0.3205	0.3117	0.3131	0.3213
	0.3117	0.3028	0.3048	0.3131
	0.3131	0.3048	0.3068	0.3145
	0.3213	0.3131	0.3145	0.3221
CIE Y	0.3481	0.3393	0.3290	0.3371
	0.3393	0.3304	0.3209	0.3290
	0.3290	0.3209	0.3113	0.3187
	0.3371	0.3290	0.3187	0.3261

5700K				
Bin	57K-1	57K-2	57K-3	57K-4
CIE X	0.3376	0.3292	0.3293	0.3371
	0.3292	0.3207	0.3215	0.3293
	0.3293	0.3215	0.3222	0.3294
	0.3371	0.3293	0.3294	0.3366
CIE Y	0.3616	0.3539	0.3423	0.3493
	0.3539	0.3462	0.3353	0.3423
	0.3423	0.3353	0.3243	0.3306
	0.3493	0.3423	0.3306	0.3369

5000K				
Bin	50K-1	50K-2	50K-3	50K-4
CIE X	0.3551	0.3464	0.3452	0.3533
	0.3464	0.3376	0.3371	0.3452
	0.3452	0.3371	0.3366	0.3441
	0.3533	0.3452	0.3441	0.3515
CIE Y	0.3760	0.3688	0.3558	0.3624
	0.3688	0.3616	0.3493	0.3558
	0.3558	0.3493	0.3369	0.3428
	0.3624	0.3558	0.3428	0.3487

4500K				
Bin	45K-1	45K-2	45K-3	45K-4
CIE X	0.3736	0.3642	0.3617	0.3703
	0.3642	0.3548	0.3530	0.3617
	0.3617	0.3530	0.3512	0.3591
	0.3703	0.3617	0.3591	0.3670
CIE Y	0.3874	0.3805	0.3663	0.3726
	0.3805	0.3736	0.3601	0.3663
	0.3663	0.3601	0.3465	0.3522
	0.3726	0.3663	0.3522	0.3578


4000K				
Bin	40K-1	40K-2	40K-3	40K-4
CIE X	0.4006	0.3871	0.3828	0.3952
	0.3871	0.3736	0.3703	0.3828
	0.3828	0.3703	0.3670	0.3784
	0.3952	0.3828	0.3784	0.3898
CIE Y	0.4044	0.3959	0.3803	0.3880
	0.3959	0.3874	0.3726	0.3803
	0.3803	0.3726	0.3578	0.3647
	0.3880	0.3803	0.3647	0.3716

3500K				
Bin	35K-1	35K-2	35K-3	35K-4
CIE X	0.4299	0.4148	0.4083	0.4223
	0.4148	0.3996	0.3943	0.4083
	0.4083	0.3943	0.3889	0.4018
	0.4223	0.4083	0.4018	0.4147
CIE Y	0.4165	0.4090	0.3921	0.3990
	0.4090	0.4015	0.3853	0.3921
	0.3921	0.3853	0.3690	0.3752
	0.3990	0.3921	0.3752	0.3814

3000K				
Bin	30K-1	30K-2	30K-3	30K-4
CIE X	0.4562	0.4431	0.4345	0.4468
	0.4431	0.4299	0.4223	0.4345
	0.4345	0.4223	0.4147	0.4260
	0.4468	0.4345	0.4260	0.4373
CIE Y	0.4260	0.4213	0.4033	0.4077
	0.4213	0.4165	0.3990	0.4033
	0.4033	0.3990	0.3814	0.3854
	0.4077	0.4033	0.3854	0.3893

2700K				
Bin	27K-1	27K-2	27K-3	27K-4
CIE X	0.4813	0.4688	0.4585	0.4703
	0.4688	0.4562	0.4468	0.4585
	0.4585	0.4468	0.4373	0.4483
	0.4703	0.4585	0.4483	0.4593
CIE Y	0.4319	0.4290	0.4104	0.4132
	0.4290	0.4260	0.4077	0.4104
	0.4104	0.4077	0.3893	0.3919
	0.4132	0.4104	0.3919	0.3944

White Color Bin Structure

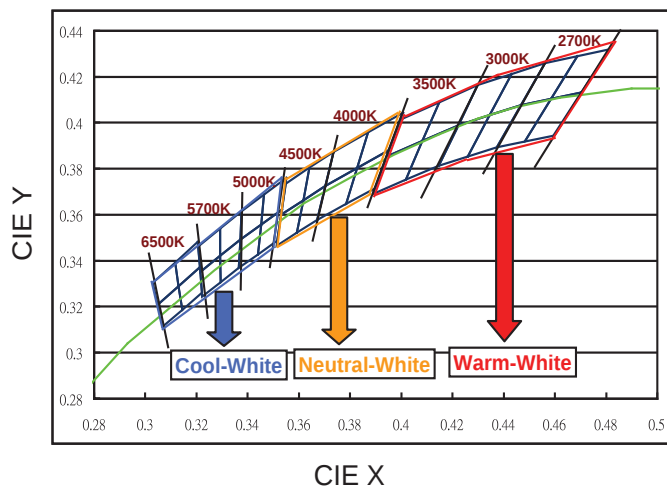

For Lighting Application Only

LOW MIDDLE POWER LED - SURFACE MOUNT PLCC TYPE LED BRIGHTNESS BINNING RANKS

Luminous Flux Bins

Unit : lm

Bin code	Range	
	Min.	Max.
D1	0.5	1.0
D2	1.0	1.5
D3	1.5	2.0
D4	2.0	2.5
D5	2.5	3.0
D6	3.0	3.5
D7	3.5	4.0
D8	4.0	4.5
D9	4.5	5.0
BA	5.0	5.5
B1	5.5	6.0
B2	6.0	6.5
B3	6.5	7.0
B4	7.0	7.5
B5	7.5	8.0
B6	8.0	8.5
B7	8.5	9.0
B8	9.0	9.5
B9	9.5	10.0
L1	10.0	11.0
L2	11.0	12.0
L3	12.0	13.0
L4	13.0	14.0
L5	14.0	15.0
L6	15.0	16.0
L7	16.0	17.0
L8	17.0	18.0
L9	18.0	19.0
M3	19.0	21.0
M4	21.0	24.0
N3	24.0	27.0
N4	27.0	33.0
P3	33.0	39.0
P4	39.0	45.0
Q3	45.0	52.0
NB	32.0	36.0
PA	36.0	40.0
PB	40.0	45.0
QA	45.0	50.0
R1	50.0	55.0
R2	55.0	60.0
R3	60.0	65.0
R4	65.0	70.0
R5	70.0	76.0
R6	76.0	83.0
R7	83.0	90.0
R8	90.0	100.0
S1	100.0	110.0
S2	110.0	120.0
S3	120.0	130.0

Luminous Flux Bins

Unit : mcd

Bin code	Range	
	Min.	Max.
2A	0	200
4A	200	400
6A	400	600
8A	600	800
AB	800	1000
2B	1000	1200
4B	1200	1400
6B	1400	1600
8B	1600	1800
AC	1800	2000
2C	2000	2200
4C	2200	2400
6C	2400	2600
8C	2600	2800
AD	2800	3000
A3	3000	3400
A4	3400	3800
A5	3800	4200
A6	4200	4600
A7	4600	5000
A8	5000	5500
A9	5500	6000
C1	6000	6500
C2	6500	7000
C3	7000	7600
C4	7600	8200
C5	8200	8800
C6	8800	9400
C7	9400	10000

VF Group Bin Code

Unit : V

Group	Bin	Min.	Max.
B2	34	2.70	2.80
	35	2.80	2.90
	36	2.90	3.00
	37	3.00	3.10
	38	3.10	3.20
	39	3.20	3.30
	40	3.30	3.40
	41	3.40	3.50
	42	3.50	3.60
	43	3.60	3.70

TECHNICAL DATA

For Lighting Application Only

LOW MIDDLE POWER LED - SURFACE MOUNT PLCC TYPE LED BRIGHTNESS BINNING RANKS


White Color Bin Coordinates

EVERLIGHT Standard Binning

10000K~9000K			9000K~8000K			8000K~7000K			7000K~6300K			6300K~5650K			5650K~5000K			5000K~4500K		
Bin	CIE X	CIE Y	Bin	CIE X	CIE Y	Bin	CIE X	CIE Y	Bin	CIE X	CIE Y	Bin	CIE X	CIE Y	Bin	CIE X	CIE Y	Bin	CIE X	CIE Y
Y6-1	0.2740	0.3010	Y6-2	0.2810	0.3090	Y6-3	0.2900	0.3180	X4	0.3010	0.3420	W4	0.3290	0.3690	V4	0.3286	0.3690	U4	0.3481	0.3856
	0.2810	0.3090		0.2900	0.3180		0.3031	0.3327		0.3140	0.3550		0.3290	0.3570		0.3481	0.3856		0.3673	0.4003
	0.2890	0.2910		0.2970	0.3000		0.3076	0.3108		0.3150	0.3440		0.3150	0.3440		0.3469	0.3717		0.3642	0.3829
	0.2830	0.2840		0.2890	0.2910		0.2970	0.3000		0.3030	0.3330		0.3140	0.3550		0.3288	0.3569		0.3469	0.3717
Y9-1	0.2830	0.2840	Y9-2	0.2890	0.2910	Y9-3	0.2970	0.3000	X5	0.3050	0.3220	W5	0.3290	0.3450	V5	0.3288	0.3569	U5	0.3469	0.3717
	0.2890	0.2910		0.2970	0.3000		0.3076	0.3108		0.3030	0.3330		0.3160	0.3330		0.3469	0.3717		0.3642	0.3829
	0.2950	0.2760		0.3020	0.2830		0.3112	0.2932		0.3150	0.3440		0.3150	0.3440		0.3458	0.3592		0.3622	0.3716
	0.2900	0.2700		0.2950	0.2760		0.3020	0.2830		0.3160	0.3330		0.3290	0.3570		0.3290	0.3451		0.3458	0.3592
									X6	0.3080	0.3110	W6	0.3290	0.3450	V6	0.3290	0.3451	U6	0.3458	0.3592
										0.3050	0.3220		0.3290	0.3310		0.3458	0.3592		0.3622	0.3716
										0.3160	0.3330		0.3170	0.3200		0.3444	0.3442		0.3594	0.3557
										0.3170	0.3200		0.3160	0.3330		0.3292	0.3313		0.3444	0.3442
									X7	0.3080	0.3110	W7	0.3290	0.3310	V7	0.3292	0.3313	U7	0.3444	0.3442
										0.3170	0.3200		0.3290	0.3200		0.3444	0.3442		0.3594	0.3557
										0.3190	0.3000		0.3180	0.3100		0.3434	0.3320		0.3571	0.3426
										0.3110	0.2930		0.3170	0.3200		0.3294	0.3202		0.3434	0.3320
												W8	0.3290	0.3200						
													0.3290	0.3100						
													0.3190	0.3000						
													0.3180	0.3100						

4500K~4100K			4100K~3800K			3800K~3500K			3500K~3250K			3250K~3050K			3050K~2850K			2850K~2670K			2670K~2500K		
Bin	CIE X	CIE Y	Bin	CIE X	CIE Y	Bin	CIE X	CIE Y	Bin	CIE X	CIE Y	Bin	CIE X	CIE Y	Bin	CIE X	CIE Y	Bin	CIE X	CIE Y	Bin	CIE X	CIE Y
T4	0.3673	0.4003	S4	0.3860	0.4130	R4	0.4023	0.4228	Q4	0.4209	0.4326	P4	0.4385	0.4404	N4	0.4538	0.4460	M4	0.4705	0.4508	K4	0.4866	0.4542
	0.3860	0.4130		0.4023	0.4228		0.4209	0.4326		0.4385	0.4404		0.4538	0.4460		0.4705	0.4508		0.4866	0.4542		0.5060	0.4579
	0.3811	0.3937		0.3963	0.4035		0.4148	0.4161		0.4312	0.4234		0.4456	0.4287		0.4614	0.4333		0.4767	0.4366		0.4945	0.4395
	0.3642	0.3829		0.3811	0.3937		0.3963	0.4035		0.4148	0.4161		0.4312	0.4234		0.4456	0.4287		0.4614	0.4333		0.4767	0.4366
T5	0.3642	0.3829	S5	0.3811	0.3937	R5	0.3963	0.4035	Q5	0.4148	0.4161	P5	0.4312	0.4234	N5	0.4456	0.4287	M5	0.4614	0.4333	K5	0.4767	0.4366
	0.3811	0.3937		0.3963	0.4035		0.4148	0.4161		0.4312	0.4234		0.4456	0.4287		0.4614	0.4333		0.4767	0.4366		0.4945	0.4395
	0.3783	0.3825		0.3924	0.3909		0.4086	0.3995		0.4240	0.4065		0.4376	0.4116		0.4525	0.4162		0.4671	0.4196		0.4840	0.4235
	0.3622	0.3716		0.3783	0.3825		0.3924	0.3909		0.4086	0.3995		0.4240	0.4065		0.4376	0.4116		0.4525	0.4162		0.4671	0.4196
T6	0.3622	0.3716	S6	0.3783	0.3825	R6	0.3924	0.3909	Q6	0.4086	0.3995	P6	0.4240	0.4065	N6	0.4376	0.4116	M6	0.4525	0.4162	K6	0.4671	0.4196
	0.3783	0.3825		0.3924	0.3909		0.4086	0.3995		0.4240	0.4065		0.4376	0.4116		0.4525	0.4162		0.4671	0.4196		0.4840	0.4235
	0.3741	0.3658		0.3871	0.3739		0.4021	0.3822		0.4165	0.3890		0.4294	0.3943		0.4436	0.3991		0.4577	0.4029		0.4740	0.4070
	0.3594	0.3557		0.3741	0.3658		0.3871	0.3739		0.4021	0.3822		0.4165	0.3890		0.4294	0.3943		0.4436	0.3991		0.4577	0.4029
T7	0.3594	0.3557	S7	0.3741	0.3658	R7	0.3871	0.3739	Q7	0.4021	0.3822	P7	0.4165	0.3890	N7	0.4294	0.3943	M7	0.4436	0.3991	K7	0.4577	0.4029
	0.3741	0.3658		0.3871	0.3739		0.4021	0.3822		0.4165	0.3890		0.4294	0.3943		0.4436	0.3991		0.4577	0.4029		0.4740	0.4070
	0.3706	0.3520		0.3826	0.3595		0.3966	0.3673		0.4100	0.3738		0.4221	0.3790		0.4356	0.3837		0.4490	0.3875		0.4640	0.3912
	0.3571	0.3426		0.3706	0.3520		0.3826	0.3595		0.3966	0.3673		0.4100	0.3738		0.4221	0.3790		0.4356	0.3837		0.4490	0.3875

White Color Bin Structure

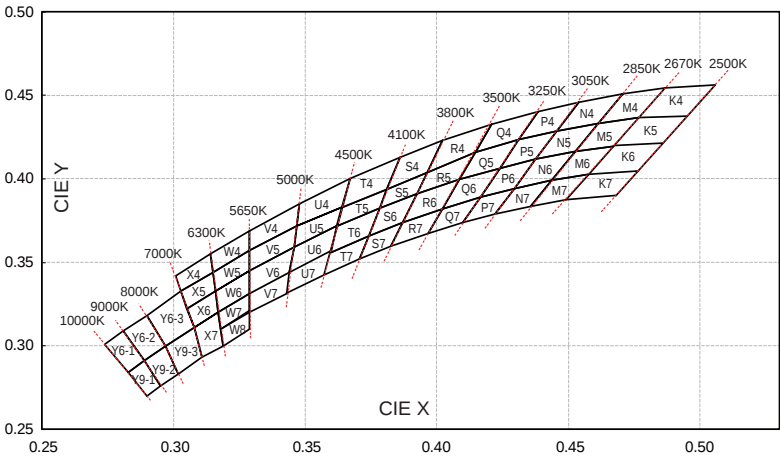


White Color Bin Coordinates

Energy Star ANSI Binning

6500K			5700K			5000K			4500K		
Bin	CIE X	CIE Y	Bin	CIE X	CIE Y	Bin	CIE X	CIE Y	Bin	CIE X	CIE Y
65K-1	0.3205	0.3481	57K-1	0.3376	0.3616	50K-1	0.3551	0.3760	45K-1	0.3736	0.3874
	0.3117	0.3393		0.3292	0.3539		0.3464	0.3688		0.3642	0.3805
	0.3131	0.3290		0.3293	0.3423		0.3452	0.3558		0.3617	0.3663
	0.3213	0.3371		0.3371	0.3493		0.3533	0.3624		0.3703	0.3726
65K-2	0.3117	0.3393	57K-2	0.3292	0.3539	50K-2	0.3464	0.3688	45K-2	0.3642	0.3805
	0.3028	0.3304		0.3207	0.3462		0.3376	0.3616		0.3548	0.3736
	0.3048	0.3209		0.3215	0.3353		0.3371	0.3493		0.3530	0.3601
	0.3131	0.3290		0.3293	0.3423		0.3452	0.3558		0.3617	0.3663
65K-3	0.3131	0.3290	57K-3	0.3293	0.3423	50K-3	0.3452	0.3558	45K-3	0.3617	0.3663
	0.3048	0.3209		0.3215	0.3353		0.3371	0.3493		0.3530	0.3601
	0.3068	0.3113		0.3222	0.3243		0.3366	0.3369		0.3512	0.3465
	0.3145	0.3187		0.3294	0.3306		0.3441	0.3428		0.3591	0.3522
65K-4	0.3213	0.3371	57K-4	0.3371	0.3493	50K-4	0.3533	0.3624	45K-4	0.3703	0.3726
	0.3131	0.3290		0.3293	0.3423		0.3452	0.3558		0.3617	0.3663
	0.3145	0.3187		0.3294	0.3306		0.3441	0.3428		0.3591	0.3522
	0.3221	0.3261		0.3366	0.3369		0.3515	0.3487		0.3670	0.3578

4000K			3500K			3000K			2700K		
Bin	CIE X	CIE Y	Bin	CIE X	CIE Y	Bin	CIE X	CIE Y	Bin	CIE X	CIE Y
40K-1	0.4006	0.4044	35K-1	0.4299	0.4165	30K-1	0.4562	0.4260	27K-1	0.4813	0.4319
	0.3871	0.3959		0.4148	0.4090		0.4431	0.4213		0.4688	0.4290
	0.3828	0.3803		0.4083	0.3921		0.4345	0.4033		0.4585	0.4104
	0.3952	0.3880		0.4223	0.3990		0.4468	0.4077		0.4703	0.4132
40K-2	0.3871	0.3959	35K-2	0.4148	0.4090	30K-2	0.4431	0.4213	27K-2	0.4688	0.4290
	0.3736	0.3874		0.3996	0.4015		0.4299	0.4165		0.4562	0.4260
	0.3703	0.3726		0.3943	0.3853		0.4223	0.3990		0.4468	0.4077
	0.3828	0.3803		0.4083	0.3921		0.4345	0.4033		0.4585	0.4104
40K-3	0.3828	0.3803	35K-3	0.4083	0.3921	30K-3	0.4345	0.4033	27K-3	0.4585	0.4104
	0.3703	0.3726		0.3943	0.3853		0.4223	0.3990		0.4468	0.4077
	0.3670	0.3578		0.3889	0.3690		0.4147	0.3814		0.4373	0.3893
	0.3784	0.3647		0.4018	0.3752		0.4260	0.3854		0.4483	0.3919
40K-4	0.3952	0.3880	35K-4	0.4223	0.3990	30K-4	0.4468	0.4077	27K-4	0.4703	0.4132
	0.3828	0.3803		0.4083	0.3921		0.4345	0.4033		0.4585	0.4104
	0.3784	0.3647		0.4018	0.3752		0.4260	0.3854		0.4483	0.3919
	0.3898	0.3716		0.4147	0.3814		0.4373	0.3893		0.4593	0.3944

White Color Bin Structure

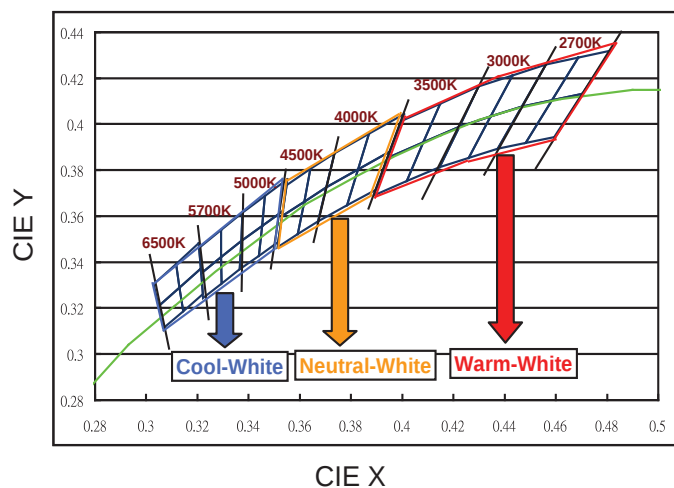

TECHNICAL DATA

SMD LED : SURFACE MOUNT CHIP LED (PCB TYPE) BRIGHTNESS BIN SELECTION

Luminous Intensity Groups

Unit : mcd

	C0: 0.28 ... 0.45	Q ▶	Q1: 72.0 ... 90.0
	D0: 0.45 ... 0.70		Q2: 90.0 ... 112
	E0: 0.70 ... 1.1	R ▶	R1: 112 ... 140
	F0: 1.1 ... 1.8		R2: 140 ... 180
	G0: 1.8 ... 2.8	S ▶	S1: 180 ... 225
	H0: 2.8 ... 4.5		S2: 225 ... 285
	J0: 4.5 ... 7.2	T ▶	T1: 285 ... 360
	K0: 7.2 ... 11.5		T2: 360 ... 450
L ▶	L1: 11.5 ... 14.5	U ▶	U1: 450 ... 565
	L2: 14.5 ... 18.0		U2: 565 ... 715
M ▶	M1: 18.0 ... 22.5		V0: 715 ... 1120
	M2: 22.5 ... 28.5		W0: 1120 ... 1800
N ▶	N1: 28.5 ... 36.0		X0: 1800 ... 2850
	N2: 36.0 ... 45.0		Y0: 2850 ... 4500
P ▶	P1: 45.0 ... 57.0		
	P2: 57.0 ... 72.0		

Note: The luminous intensity data did not include $\pm 15\%$ testing tolerance.

V_F (Forward Voltage Spec. Setup)

Unit : V

Forward Voltage Groups		Bin	Min.	Max.
	A	00	1.55	1.75
		0	1.75	1.95
		1	1.95	2.15
	B	2	2.15	2.35
		3	2.35	2.55
		4	2.55	2.75
	C	5	2.75	3.05
		6	3.05	3.35
		7	3.35	3.65
		8	3.65	3.95
	D	10	2.70	2.90
		11	2.90	3.10
		12	3.10	3.30
		13	3.30	3.50
		14	3.50	3.70
	E	15	2.70	2.85
		16	2.85	3.00
		17	3.00	3.15
		18	3.15	3.30

Note: The forward voltage data did not include $\pm 0.1V$ testing tolerance.

For Lighting Application Only

SMD LED : SURFACE MOUNT PLCC LED (REFLECTOR) / LOW POWER LED BRIGHTNESS BIN SELECTION

Luminous Intensity Groups

Unit : mcd


Bin code	Range		Bin code	Range		Bin code	Range		Bin code	Range		Bin code	Range		Bin code	Range	
	Min.	Max.		Min.	Max.		Min.	Max.		Min.	Max.		Min.	Max.		Min.	Max.
2A	0	200	2C	2000	2200	2E	4000	4200	2G	6000	6200	2J	8000	8200	8K	9600	9800
4A	200	400	4C	2200	2400	4E	4200	4400	4G	6200	6400	4J	8200	8400	AL	9800	10000
6A	400	600	6C	2400	2600	6E	4400	4600	6G	6400	6600	2J	8000	8200	2L	10000	10200
8A	600	800	8C	2600	2800	8E	4600	4800	8G	6600	6800	4J	8200	8400	4L	10200	10400
AB	800	1000	AD	2800	3000	AF	4800	5000	AH	6800	7000	6J	8400	8600	6L	10400	10600
2B	1000	1200	2D	3000	3200	2F	5000	5200	2H	7000	7200	8J	8600	8800	8L	10600	10800
4B	1200	1400	4D	3200	3400	4F	5200	5400	4H	7200	7400	AK	8800	9000	AM	10800	11000
6B	1400	1600	6D	3400	3600	6F	5400	5600	6H	7400	7600	2K	9000	9200			
8B	1600	1800	8D	3600	3800	8F	5600	5800	8H	7600	7800	4K	9200	9400			
AC	1800	2000	AE	3800	4000	AG	5800	6000	AJ	7800	8000	6K	9400	9600			

V_F (Forward Voltage Spec. Setup)

Unit : V

Forward Voltage Groups	Bin	Min.	Max.
G	34	2.7	2.8
	35	2.8	2.9
	36	2.9	3
	37	3	3.1
	38	3.1	3.2
	39	3.2	3.3
	40	3.3	3.4
	41	3.4	3.5
	42	3.5	3.6
	43	3.6	3.7

Bin Structure

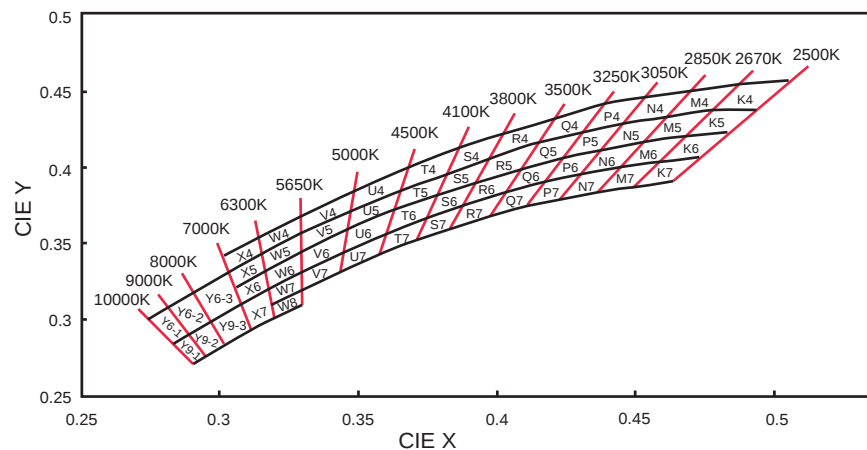

Bin Coordinate


10000K~9000K			9000K~8000K			8000K~7000K			7000K~6300K			6300K~5650K			5650K~5000K		
Rank	CIE_x	CIE_y	Rank	CIE_x	CIE_y	Rank	CIE_x	CIE_y	Rank	CIE_x	CIE_y	Rank	CIE_x	CIE_y	Rank	CIE_x	CIE_y
Y6-1	0.2740	0.3010	Y6-2	0.2810	0.3090	Y6-3	0.2900	0.3180	X4	0.3011	0.3422	W4	0.3136	0.3550	V4	0.3286	0.3690
	0.2810	0.3090		0.2900	0.3180		0.3031	0.3327		0.3136	0.3550		0.3286	0.3690		0.3481	0.3856
	0.2890	0.2910		0.2970	0.3000		0.3076	0.3108		0.3148	0.3444		0.3288	0.3569		0.3469	0.3717
	0.2830	0.2840		0.2890	0.2910		0.2970	0.3000		0.3031	0.3327		0.3148	0.3444		0.3288	0.3569
Y9-1	0.2830	0.2840	Y9-2	0.2890	0.2910	Y9-3	0.2970	0.3000	X5	0.3031	0.3327	W5	0.3148	0.3444	V5	0.3288	0.3569
	0.2890	0.2910		0.2970	0.3000		0.3076	0.3108		0.3148	0.3444		0.3288	0.3569		0.3469	0.3717
	0.2950	0.2760		0.3020	0.2830		0.3112	0.2932		0.3160	0.3332		0.3290	0.3451		0.3458	0.3592
	0.2900	0.2700		0.2950	0.2760		0.3020	0.2830		0.3052	0.3224		0.3160	0.3332		0.3290	0.3451
									X6	0.3052	0.3224	W6	0.3160	0.3332	V6	0.3290	0.3451
										0.3160	0.3332		0.3290	0.3451		0.3458	0.3592
										0.3175	0.3204		0.3292	0.3313		0.3444	0.3442
										0.3076	0.3108		0.3175	0.3204		0.3292	0.3313
									X7	0.3076	0.3108	W7	0.3175	0.3204	V7	0.3292	0.3313
										0.3175	0.3204		0.3292	0.3313		0.3444	0.3442
										0.3196	0.3013		0.3294	0.3202		0.3434	0.3320
										0.3112	0.2932		0.3186	0.3102		0.3294	0.3202
												W8	0.3186	0.3102			
													0.3294	0.3202			
													0.3295	0.3105			
													0.3196	0.3013			

TECHNICAL DATA

For Lighting Application Only

SMD LED : SURFACE MOUNT PLCC LED (REFLECTOR) / LOW POWER LED
BRIGHTNESS BIN SELECTION

Bin Structure

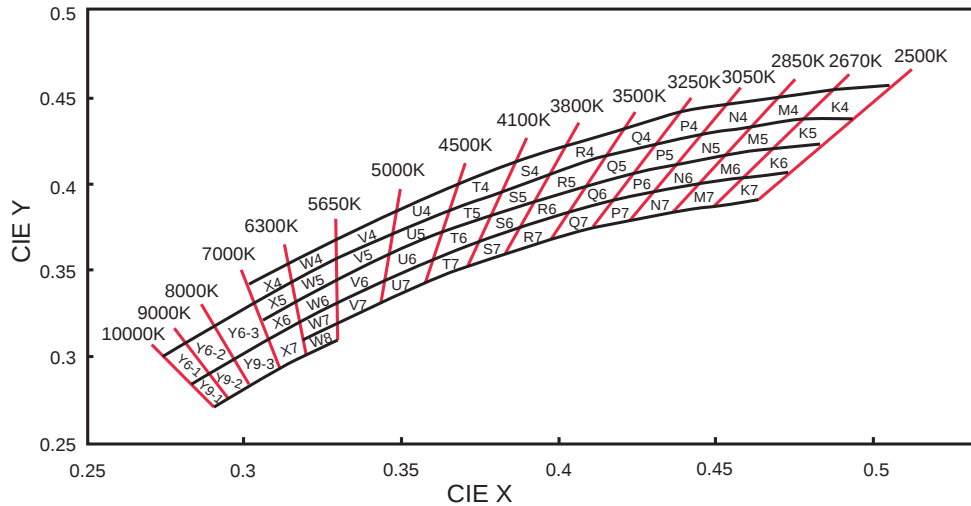

Bin Coordinate

5000K~4500K			4500K~4100K			4100K~3800K			3800K~3500K			3500K~3250K			3250K~3050K		
Rank	CIE_x	CIE_y	Rank	CIE_x	CIE_y	Rank	CIE_x	CIE_y	Rank	CIE_x	CIE_y	Rank	CIE_x	CIE_y	Rank	CIE_x	CIE_y
U4	0.3481	0.3856	T4	0.3673	0.4003	S4	0.3860	0.4130	R4	0.4023	0.4228	Q4	0.4209	0.4326	P4	0.4385	0.4404
	0.3673	0.4003		0.3860	0.4130		0.4023	0.4228		0.4209	0.4326		0.4385	0.4404			
	0.3642	0.3829		0.3811	0.3937		0.3963	0.4035		0.4148	0.4161		0.4312	0.4234		0.4456	0.4287
	0.3469	0.3717		0.3642	0.3829		0.3811	0.3937		0.3963	0.4035		0.4148	0.4161		0.4312	0.4234
U5	0.3469	0.3717	T5	0.3642	0.3829	S5	0.3811	0.3937	R5	0.3963	0.4035	Q5	0.4148	0.4161	P5	0.4312	0.4234
	0.3642	0.3829		0.3811	0.3937		0.3963	0.4035		0.4148	0.4161		0.4312	0.4234		0.4456	0.4287
	0.3622	0.3716		0.3783	0.3825		0.3924	0.3909		0.4086	0.3995		0.4240	0.4065		0.4376	0.4116
	0.3458	0.3592		0.3622	0.3716		0.3783	0.3825		0.3924	0.3909		0.4086	0.3995		0.4240	0.4065
U6	0.3458	0.3592	T6	0.3622	0.3716	S6	0.3783	0.3825	R6	0.3924	0.3909	Q6	0.4086	0.3995	P6	0.4240	0.4065
	0.3622	0.3716		0.3783	0.3825		0.3924	0.3909		0.4086	0.3995		0.4240	0.4065		0.4376	0.4116
	0.3594	0.3557		0.3741	0.3658		0.3871	0.3739		0.4021	0.3822		0.4165	0.3890		0.4294	0.3943
	0.3444	0.3442		0.3594	0.3557		0.3741	0.3658		0.3871	0.3739		0.4021	0.3822		0.4165	0.3890
U7	0.3444	0.3442	T7	0.3594	0.3557	S7	0.3741	0.3658	R7	0.3871	0.3739	Q7	0.4021	0.3822	P7	0.4165	0.3890
	0.3594	0.3557		0.3741	0.3658		0.3871	0.3739		0.4021	0.3822		0.4165	0.3890		0.4294	0.3943
	0.3571	0.3426		0.3706	0.3520		0.3826	0.3595		0.3966	0.3673		0.4100	0.3738		0.4221	0.3790
	0.3434	0.3320		0.3571	0.3426		0.3706	0.3520		0.3826	0.3595		0.3966	0.3673		0.4100	0.3738
3050K~2850K			2850K~2670K			2670K~2500K											
Rank	CIE_x	CIE_y	Rank	CIE_x	CIE_y	Rank	CIE_x	CIE_y									
N4	0.4538	0.4460	M4	0.4705	0.4508	K4	0.4866	0.4542									
	0.4705	0.4508		0.4866	0.4542		0.5060	0.4579									
	0.4614	0.4333		0.4767	0.4366		0.4945	0.4395									
	0.4456	0.4287		0.4614	0.4333		0.4767	0.4366									
N5	0.4456	0.4287	M5	0.4614	0.4333	K5	0.4767	0.4366									
	0.4614	0.4333		0.4767	0.4366		0.4945	0.4395									
	0.4525	0.4162		0.4671	0.4196		0.4840	0.4235									
	0.4376	0.4116		0.4525	0.4162		0.4671	0.4196									
N6	0.4376	0.4116	M6	0.4525	0.4162	K6	0.4671	0.4196									
	0.4525	0.4162		0.4671	0.4196		0.4840	0.4235									
	0.4436	0.3991		0.4577	0.4029		0.4740	0.4070									
	0.4294	0.3943		0.4436	0.3991		0.4577	0.4029									
N7	0.4294	0.3943	M7	0.4436	0.3991	K7	0.4577	0.4029									
	0.4436	0.3991		0.4577	0.4029		0.4740	0.4070									
	0.4356	0.3837		0.4490	0.3875		0.4640	0.3912									
	0.4221	0.3790		0.4356	0.3837		0.4490	0.3875									

For Lighting Application Only

SMD LED MID-POWER (62-227B SERIES) BRIGHTNESS BIN SELECTION

Luminous Flux Characteristics

Unit : lm

Group	Bin	Min	Max
F	F3	0.2	0.5
	F4	0.5	1
G	G3	1	2
	G4	2	3
H	H3	3	4
	H4	4	5
J	J3	5	6
	J4	6	8
K	K3	8	10
	K4	10	13
L	L3	13	16
	L4	16	19
M	M3	19	21
	M4	21	24
N	N3	24	27
	N4	27	33
P	P3	33	39
	P4	39	45
Q	Q3	45	52
	Q4	52	60
R	R3	60	70
	R4	70	80
S	S3	80	90
	S4	90	100


V_F Group Bin Code

Unit : V

Group	Bin	Min.	Max
G	34	2.70	2.80
	35	2.80	2.90
	36	2.90	3.00
	37	3.00	3.10
	38	3.10	3.20
	39	3.20	3.30
	40	3.30	3.40
	41	3.40	3.50
	42	3.50	3.60
	43	3.60	3.70
S2	5#8	5.80	5.90
	5#9	5.90	6.00
	6#0	6.00	6.10
	6#1	6.10	6.20
	6#2	6.20	6.30
	6#3	6.30	6.40
	6#4	6.40	6.50
	6#5	6.50	6.60
	6#6	6.60	6.70
	6#7	6.70	6.80
	6#8	6.80	6.90
	6#9	6.90	7.00

SMD LED (99-616, 45-21, 50-215 SERIES)
BRIGHTNESS BIN SELECTION

Chromaticity Diagram

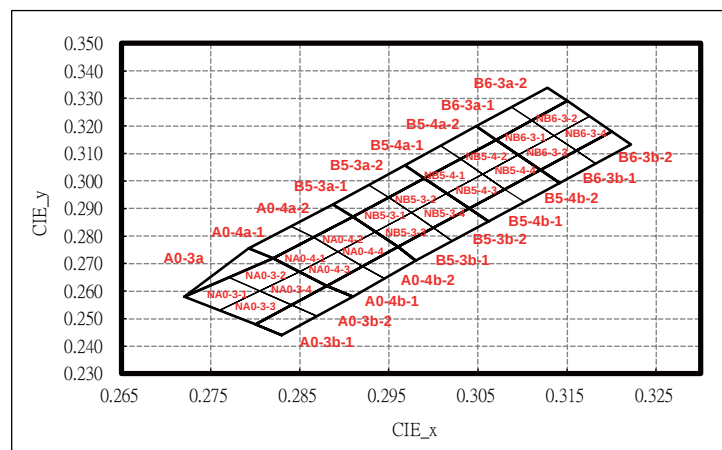

Bin Code of Chromaticity Coordinates

Bin Code	CIE_x	CIE_y	Bin Code	CIE_x	CIE_y	Bin Code	CIE_x	CIE_y	Bin Code	CIE_x	CIE_y
NA0-3-1	0.2760	0.2530	NA0-3-2	0.2805	0.2600	NA0-4-1	0.2850	0.2670	NA0-4-2	0.2893	0.2743
	0.2720	0.2580		0.2770	0.2650		0.2820	0.2720		0.2865	0.2795
	0.2770	0.2650		0.2820	0.2720		0.2865	0.2795		0.2910	0.2870
	0.2805	0.2600		0.2850	0.2670		0.2893	0.2743		0.2935	0.2815
NA0-3-3	0.2800	0.2480	NA0-3-4	0.2840	0.2550	NA0-4-3	0.2880	0.2620	NA0-4-4	0.2920	0.2690
	0.2760	0.2530		0.2805	0.2600		0.2850	0.2670		0.2893	0.2743
	0.2805	0.2600		0.2850	0.2670		0.2893	0.2743		0.2935	0.2815
	0.2840	0.2550		0.2880	0.2620		0.2920	0.2690		0.2960	0.2760
A0-3b-1	0.2830	0.2440	A0-3b-2	0.2870	0.2510	A0-4b-1	0.2910	0.2580	A0-4b-2	0.2945	0.2645
	0.2800	0.2480		0.2840	0.2550		0.2880	0.2620		0.2920	0.2690
	0.2840	0.2550		0.2880	0.2620		0.2920	0.2690		0.2960	0.2760
	0.2870	0.2510		0.2910	0.2580		0.2945	0.2645		0.2980	0.2710
A0-4a-1	0.2820	0.2720	A0-4a-2	0.2865	0.2795	B5-3a-1	0.2910	0.2870	B5-3a-2	0.2950	0.2940
	0.2793	0.2755		0.2840	0.2836		0.2887	0.2916		0.2928	0.2987
	0.2840	0.2836		0.2887	0.2916		0.2928	0.2987		0.2968	0.3058
	0.2865	0.2795		0.2910	0.2870		0.2950	0.2940		0.2990	0.3010
A0-3a	0.2720	0.2580			NB5-3-1	0.2935	0.2815	NB5-3-2	0.2975	0.2885	
	0.2793	0.2755				0.2910	0.2870		0.2950	0.2940	
	0.2820	0.2720				0.2950	0.2940		0.2990	0.3010	
	0.2720	0.2580				0.2975	0.2885		0.3015	0.2955	
Bin Code	CIE_x	CIE_y	Bin Code	CIE_x	CIE_y	Bin Code	CIE_x	CIE_y	Bin Code	CIE_x	CIE_y
NB5-3-3	0.2960	0.2760	NB5-3-4	0.3000	0.2830	B5-4b-1	0.3062	0.2853	B5-4b-2	0.3102	0.2923
	0.2935	0.2815		0.2975	0.2885		0.3040	0.2900		0.3080	0.2970
	0.2975	0.2885		0.3015	0.2955		0.3080	0.2970		0.3120	0.3040
	0.3000	0.2830		0.3040	0.2900		0.3102	0.2923		0.3142	0.2993
B5-3b-1	0.2980	0.2710	B5-3b-2	0.3021	0.2782	B6-3a-1	0.3070	0.3150	B6-3a-2	0.3110	0.3220
	0.2960	0.2760		0.3000	0.2830		0.3048	0.3198		0.3088	0.3268
	0.3000	0.2830		0.3040	0.2900		0.3088	0.3268		0.3128	0.3338
	0.3021	0.2782		0.3062	0.2853		0.3110	0.3220		0.3150	0.3290
B5-4a-1	0.2990	0.3010	B5-4a-2	0.3030	0.3080	NB6-3-1	0.3095	0.3095	NB6-3-2	0.3135	0.3165
	0.2968	0.3058		0.3008	0.3128		0.3070	0.3150		0.3110	0.3220
	0.3008	0.3128		0.3048	0.3198		0.3110	0.3220		0.3150	0.3290
	0.3030	0.3080		0.3070	0.3150		0.3135	0.3165		0.3175	0.3235
NB5-4-1	0.3015	0.2955	NB5-4-2	0.3055	0.3025	NB6-3-3	0.3120	0.3040	NB6-3-4	0.3160	0.3110
	0.2990	0.3010		0.3030	0.3080		0.3095	0.3095		0.3135	0.3165
	0.3030	0.3080		0.3070	0.3150		0.3135	0.3165		0.3175	0.3235
	0.3055	0.3025		0.3095	0.3095		0.3160	0.3110		0.3200	0.3180
NB5-4-3	0.3040	0.2900	NB5-4-4	0.3080	0.2970	B6-3b-1	0.3142	0.2993	B6-3b-2	0.3182	0.3063
	0.3015	0.2955		0.3055	0.3025		0.3120	0.3040		0.3160	0.3110
	0.3055	0.3025		0.3095	0.3095		0.3160	0.3110		0.3200	0.3180
	0.3080	0.2970		0.3120	0.3040		0.3182	0.3063		0.3222	0.3133

Luminous Intensity Groups

Unit : mcd

Bin	Min.	Max.	Bin	Min.	Max.	Bin	Min.	Max.
01	500	600	23	1250	1300	45	2500	2600
02	600	630	24	1300	1350	46	2600	2700
03	630	660	25	1350	1400	47	2700	2800
04	660	690	26	1400	1450	48	2800	2900
05	690	720	27	1450	1500	49	2900	3000
06	720	750	28	1500	1550	50	3000	3100
07	750	780	29	1550	1600	51	3100	3200
08	780	810	30	1600	1650			
09	810	840	31	1650	1700			
10	840	870	32	1700	1750			
11	870	900	33	1750	1800			
12	900	930	34	1800	1850			
13	930	960	35	1850	1900	H42	2200	2250
14	960	990	36	1900	1950	H43	2250	2300
15	990	1020	37	1950	2000	H44	2300	2350
16	1020	1050	38	2000	2050	H45	2350	2400
17	1050	1080	39	2050	2100	H46	2400	2450
18	1080	1110	40	2100	2150	H47	2450	2500
19	1110	1140	41	2150	2200	H48	2500	2550
20	1140	1170	42	2200	2300	H49	2550	2600
21	1170	1200	43	2300	2400	H50	2600	2650
22	1200	1250	44	2400	2500	H51	2650	2700

Note: Tolerance of Luminous Intensity: $\pm 7\%$

Luminous Flux

Unit : lm

Bin	Min.	Max.
40	4.00	4.25
42	4.25	4.50
45	4.50	4.75
47	4.75	5.00
50	5.00	5.25
52	5.25	5.50
55	5.50	5.75
57	5.75	6.00
60	6.00	6.25
62	6.25	6.50
65	6.50	6.75
67	6.75	7.00
70	7.00	7.25
72	7.25	7.50
75	7.50	7.75
77	7.75	8.00

V_F (Forward Voltage Spec. Setup)

Unit : V

Groups										Bin	Min.	Max.	Groups		Bin	Min.	Max.	Groups	Bin	Min.	Max.					
0	1						8	D	P	6-1	2.95	3.05	A	G	6-1-1	2.95	3.00	9	6-11	3.00	3.05					
										6-2	3.05	3.15			6-1-2	3.00	3.05		6-2	3.05	3.15					
		2	3	4	5	6				7		7-1			3.15	3.25	6-2-1		3.05	3.10	7-1	3.15	3.25			
												7-2			3.25	3.35	6-2-2		3.10	3.15	7-2	3.25	3.35			
												8-1			3.35	3.45	7-1-1		3.15	3.20	8-1	3.35	3.45			
									8-2	3.45	3.55	7-1-2			3.20	3.25	8-11		3.45	3.50						
											9-1	3.55			3.65	7-2-1	3.25		3.30							
											9-2	3.65			3.75	7-2-2	3.30		3.35							


Groups												Bin	Min.	Max.
W	S										Y	4-2-3	2.7	2.8
												5-1-3	2.8	2.9
												5-2-3	2.9	3.0
												6-1-3	3.0	3.1
	R	L	N	B	C	K	H	E	Q	F		6-2-3	3.1	3.2
												7-1-3	3.2	3.3
												7-2-3	3.3	3.4
												8-1-3	3.4	3.5

Note: Tolerance of Forward Voltage: $\pm 0.05V$

TECHNICAL DATA

SMD LED (99-713 SERIES) BRIGHTNESS BIN SELECTION

Chromaticity Diagram

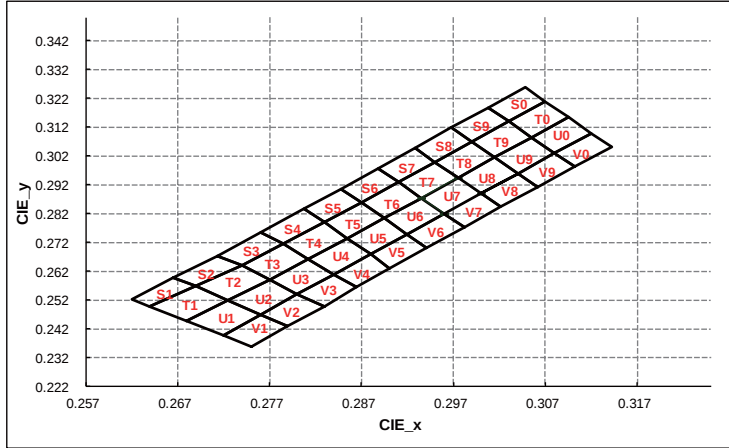

Bin Code of Chromaticity Coordinates

Bin	CIE_x	CIE_y	Bin	CIE_x	CIE_y	Bin	CIE_x	CIE_y	Bin	CIE_x	CIE_y	Bin	CIE_x	CIE_y
S1	0.2665	0.2600	S2	0.2713	0.2675	S3	0.2740	0.2640	S4	0.2785	0.2715	S5	0.2830	0.2790
	0.2690	0.2570		0.2740	0.2640		0.2713	0.2675		0.2760	0.2756		0.2807	0.2836
	0.2640	0.2500		0.2690	0.2570		0.2760	0.2756		0.2807	0.2836		0.2848	0.2907
	0.2620	0.2525		0.2665	0.2600		0.2785	0.2715		0.2830	0.2790		0.2870	0.2860
T1	0.2680	0.2450	T2	0.2725	0.2520	T3	0.2770	0.2590	T4	0.2813	0.2663	T5	0.2855	0.2735
	0.2640	0.2500		0.2690	0.2570		0.2740	0.2640		0.2785	0.2715		0.2830	0.2790
	0.2690	0.2570		0.2740	0.2640		0.2785	0.2715		0.2830	0.2790		0.2870	0.2860
	0.2725	0.2520		0.2770	0.2590		0.2813	0.2663		0.2855	0.2735		0.2895	0.2805
U1	0.2720	0.2400	U2	0.2760	0.2470	U3	0.2800	0.2540	U4	0.2840	0.2610	U5	0.2880	0.2680
	0.2680	0.2450		0.2725	0.2520		0.2770	0.2590		0.2813	0.2663		0.2855	0.2735
	0.2725	0.2520		0.2770	0.2590		0.2813	0.2663		0.2855	0.2735		0.2895	0.2805
	0.2760	0.2470		0.2800	0.2540		0.2840	0.2610		0.2880	0.2680		0.2920	0.2750
V1	0.2750	0.2360	V2	0.2790	0.2430	V3	0.2830	0.2500	V4	0.2865	0.2565	V5	0.2900	0.2630
	0.2720	0.2400		0.2760	0.2470		0.2800	0.2540		0.2840	0.2610		0.2880	0.2680
	0.2760	0.2470		0.2800	0.2540		0.2840	0.2610		0.2880	0.2680		0.2920	0.2750
	0.2790	0.2430		0.2830	0.2500		0.2865	0.2565		0.2900	0.2630		0.2941	0.2702
Bin	CIE_x	CIE_y	Bin	CIE_x	CIE_y	Bin	CIE_x	CIE_y	Bin	CIE_x	CIE_y	Bin	CIE_x	CIE_y
S6	0.2870	0.2860	S7	0.2910	0.2930	S8	0.2950	0.3000	S9	0.2990	0.3070	S0	0.3030	0.3140
	0.2848	0.2907		0.2888	0.2978		0.2928	0.3048		0.2968	0.3118		0.3008	0.3188
	0.2888	0.2978		0.2928	0.3048		0.2968	0.3118		0.3008	0.3188		0.3048	0.3258
	0.2910	0.2930		0.2950	0.3000		0.2990	0.3070		0.3030	0.3140		0.3070	0.3210
T6	0.2895	0.2805	T7	0.2935	0.2875	T8	0.2975	0.2945	T9	0.3015	0.3015	T0	0.3055	0.3085
	0.2870	0.2860		0.2910	0.2930		0.2950	0.3000		0.2990	0.3070		0.3030	0.3140
	0.2910	0.2930		0.2950	0.3000		0.2990	0.3070		0.3030	0.3140		0.3070	0.3210
	0.2935	0.2875		0.2975	0.2945		0.3015	0.3015		0.3055	0.3085		0.3095	0.3155
U6	0.2920	0.2750	U7	0.2960	0.2820	U8	0.3000	0.2890	U9	0.3040	0.2960	U0	0.3080	0.3030
	0.2895	0.2805		0.2935	0.2875		0.2975	0.2945		0.3015	0.3015		0.3055	0.3085
	0.2935	0.2875		0.2975	0.2945		0.3015	0.3015		0.3055	0.3085		0.3095	0.3155
	0.2960	0.2820		0.3000	0.2890		0.3040	0.2960		0.3080	0.3030		0.3120	0.3100
V6	0.2941	0.2702	V7	0.2982	0.2773	V8	0.3000	0.2890	V9	0.3062	0.2913	V0	0.3102	0.2983
	0.2920	0.2750		0.2960	0.2820		0.3040	0.2960		0.3040	0.2960		0.3080	0.3030
	0.2960	0.2820		0.3000	0.2890		0.3062	0.2913		0.3080	0.3030		0.3120	0.3100
	0.2982	0.2773		0.3022	0.2843		0.3022	0.2843		0.3102	0.2983		0.3142	0.3053

Luminous Intensity Groups

Unit : mcd

Bin	Min.	Max.	Bin	Min.	Max.	Bin	Min.	Max.
01	500	600	1	0	50	45	0	100
02	600	630	2	50	100	46	100	200
03	630	660	3	100	150	47	200	300
04	660	690	4	150	200	48	300	400
05	690	720	5	200	250	49	400	500
06	720	750	28	250	300	50	500	600
07	750	780	29	300	350	51	600	700
08	780	810	30	350	400	52	700	800
09	810	840	31	400	450	H40	2100	2150
10	840	870	32	450	500	H41	2150	2200
11	870	900	33	500	550	H42	2200	2250
12	900	930	34	550	600	H43	2250	2300
13	930	960	35	600	650	H44	2300	2350
14	960	990	36	650	700	H45	2350	2400
15	990	1020	37	700	750	H46	2400	2450
16	1020	1050	38	750	800	H47	2450	2500
17	1050	1080	39	800	850	H48	2500	2550
18	1080	1110	40	850	900	H49	2550	2600
19	1110	1140	41	900	950	H50	2600	2650
20	1140	1170	42	950	1050	H51	2650	2700
21	1170	1200	43	1050	1150	H52	2700	2750

Note: Tolerance of Luminous Intensity: $\pm 7\%$

Luminous Flux

Unit : lm

Bin	Min.	Max.
40	4.00	4.25
42	4.25	4.50
45	4.50	4.75
47	4.75	5.00
50	5.00	5.25
52	5.25	5.50
55	5.50	5.75
57	5.75	6.00
60	6.00	6.25
62	6.25	6.50
65	6.50	6.75
67	6.75	7.00
70	7.00	7.25
72	7.25	7.50
75	7.50	7.75
77	7.75	8.00

V_F (Forward Voltage Spec. Setup)

Unit : V


Bin	Min.	Max.
A	2.70	2.75
B	2.75	2.80
C	2.80	2.85
D	2.85	2.90
E	2.90	2.95
F	2.95	3.00
G	3.00	3.05
H	3.05	3.10
I	3.10	3.15
J	3.15	3.20
K	3.20	3.25
L	3.25	3.30
M	3.30	3.35
N	3.35	3.40
O	3.40	3.45
P	3.45	3.50
Q	3.50	3.55
R	3.55	3.60
S	3.60	3.65
T	3.65	3.70
U	3.70	3.75
V	3.75	3.80

Note: Tolerance of Forward Voltage: $\pm 0.05V$

TECHNICAL DATA

SMD LED (50-315 SERIES) BRIGHTNESS BIN SELECTION

Chromaticity Diagram

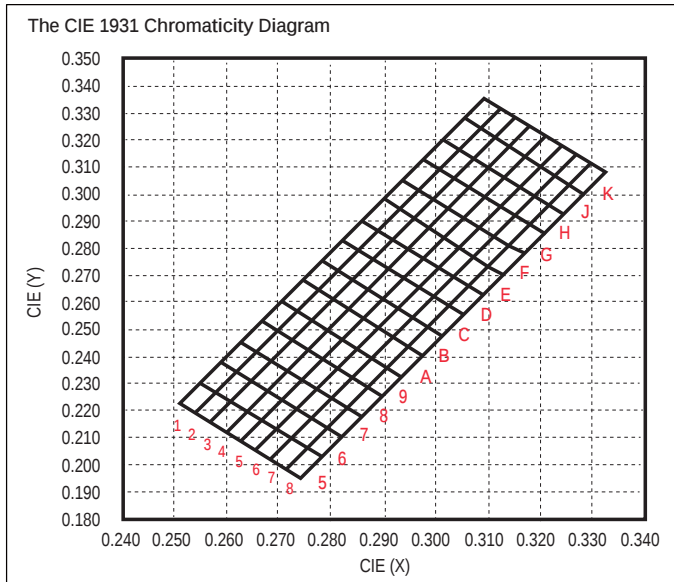

Bin Code of Chromaticity Coordinates

Bin	CIE_x	CIE_y	Bin	CIE_x	CIE_y	Bin	CIE_x	CIE_y
A1	0.2731	0.2569	B1	0.2770	0.2644	C1	0.2809	0.2719
	0.2702	0.2603		0.2741	0.2678		0.2780	0.2753
	0.2741	0.2678		0.2780	0.2753		0.2819	0.2828
	0.2770	0.2644		0.2809	0.2719		0.2848	0.2794
A2	0.2760	0.2535	B2	0.2799	0.2610	C2	0.2838	0.2685
	0.2731	0.2569		0.2770	0.2644		0.2809	0.2719
	0.2770	0.2644		0.2809	0.2719		0.2848	0.2794
	0.2799	0.2610		0.2838	0.2685		0.2877	0.2760
A3	0.2789	0.2501	B3	0.2828	0.2576	C3	0.2867	0.2651
	0.2760	0.2535		0.2799	0.2610		0.2838	0.2685
	0.2799	0.2610		0.2838	0.2685		0.2877	0.2760
	0.2828	0.2576		0.2867	0.2651		0.2906	0.2726
A4	0.2818	0.2467	B4	0.2856	0.2539	C4	0.2895	0.2614
	0.2789	0.2501		0.2828	0.2576		0.2867	0.2651
	0.2828	0.2576		0.2867	0.2651		0.2906	0.2726
	0.2856	0.2539		0.2895	0.2614		0.2934	0.2689
A5	0.2847	0.2433	B5	0.2885	0.2505	C5	0.2924	0.2580
	0.2818	0.2467		0.2856	0.2539		0.2895	0.2614
	0.2856	0.2539		0.2895	0.2614		0.2934	0.2689
	0.2885	0.2505		0.2924	0.2580		0.2963	0.2655
A6	0.2876	0.2399	B6	0.2915	0.2474	C6	0.2954	0.2549
	0.2847	0.2433		0.2885	0.2505		0.2924	0.2580
	0.2885	0.2505		0.2924	0.2580		0.2963	0.2655
	0.2915	0.2474		0.2954	0.2549		0.2992	0.2621
A7	0.2905	0.2365	B7	0.2944	0.2440	C7	0.2983	0.2515
	0.2876	0.2399		0.2915	0.2474		0.2954	0.2549
	0.2915	0.2474		0.2954	0.2549		0.2992	0.2621
	0.2944	0.2440		0.2983	0.2515		0.3021	0.2587
A8	0.2934	0.2331	B8	0.2973	0.2406	C8	0.3012	0.2481
	0.2905	0.2365		0.2944	0.2440		0.2983	0.2515
	0.2944	0.2440		0.2983	0.2515		0.3021	0.2587
	0.2973	0.2406		0.3012	0.2481		0.3051	0.2556

Bin	CIE_x	CIE_y	Bin	CIE_x	CIE_y	Bin	CIE_x	CIE_y	Bin	CIE_x	CIE_y	Bin	CIE_x	CIE_y	Bin	CIE_x	CIE_y
D1	0.2848	0.2794	E1	0.2887	0.2869	F1	0.2926	0.2944	G1	0.2965	0.3019	H1	0.3004	0.3094	J1	0.3043	0.3169
	0.2819	0.2828		0.2858	0.2903		0.2897	0.2978		0.2936	0.3053		0.2975	0.3128		0.3014	0.3203
	0.2858	0.2903		0.2897	0.2978		0.2936	0.3053		0.2975	0.3128		0.3014	0.3203		0.3053	0.3278
	0.2887	0.2869		0.2926	0.2944		0.2965	0.3019		0.3004	0.3094		0.3043	0.3169		0.3082	0.3244
D2	0.2877	0.2760	E2	0.2916	0.2835	F2	0.2955	0.2910	G2	0.2994	0.2985	H2	0.3033	0.3060	J2	0.3072	0.3135
	0.2848	0.2794		0.2887	0.2869		0.2926	0.2944		0.2965	0.3019		0.3004	0.3094		0.3043	0.3169
	0.2887	0.2869		0.2926	0.2944		0.2965	0.3019		0.3004	0.3094		0.3043	0.3169		0.3082	0.3244
	0.2916	0.2835		0.2955	0.2910		0.2994	0.2985		0.3033	0.3060		0.3072	0.3135		0.3111	0.3210
D3	0.2906	0.2726	E3	0.2945	0.2801	F3	0.2984	0.2876	G3	0.3023	0.2951	H3	0.3062	0.3026	J3	0.3101	0.3101
	0.2877	0.2760		0.2916	0.2835		0.2955	0.2910		0.2994	0.2985		0.3033	0.3060		0.3072	0.3135
	0.2916	0.2835		0.2955	0.2910		0.2994	0.2985		0.3033	0.3060		0.3072	0.3135		0.3111	0.3210
	0.2945	0.2801		0.2984	0.2876		0.3023	0.2951		0.3062	0.3026		0.3101	0.3101		0.3140	0.3176
D4	0.2934	0.2689	E4	0.2973	0.2764	F4	0.3012	0.2839	G4	0.3051	0.2914	H4	0.3090	0.2989	J4	0.3129	0.3064
	0.2906	0.2726		0.2945	0.2801		0.2984	0.2876		0.3023	0.2951		0.3062	0.3026		0.3101	0.3101
	0.2945	0.2801		0.2984	0.2876		0.3023	0.2951		0.3062	0.3026		0.3101	0.3101		0.3140	0.3176
	0.2973	0.2764		0.3012	0.2839		0.3051	0.2914		0.3090	0.2989		0.3129	0.3064		0.3168	0.3139
D5	0.2963	0.2655	E5	0.3002	0.2730	F5	0.3041	0.2805	G5	0.3080	0.2880	H5	0.3119	0.2955	J5	0.3158	0.3030
	0.2934	0.2689		0.2973	0.2764		0.3012	0.2839		0.3051	0.2914		0.3090	0.2989		0.3129	0.3064
	0.2973	0.2764		0.3012	0.2839		0.3051	0.2914		0.3090	0.2989		0.3129	0.3064		0.3168	0.3139
	0.3002	0.2730		0.3041	0.2805		0.3080	0.2880		0.3119	0.2955		0.3158	0.3030		0.3197	0.3105
D6	0.2992	0.2621	E6	0.3031	0.2696	F6	0.3070	0.2771	G6	0.3109	0.2846	H6	0.3148	0.2921	J6	0.3187	0.2996
	0.2963	0.2655		0.3002	0.2730		0.3041	0.2805		0.3080	0.2880		0.3119	0.2955		0.3158	0.3030
	0.3002	0.2730		0.3041	0.2805		0.3080	0.2880		0.3119	0.2955		0.3158	0.3030		0.3197	0.3105
	0.3031	0.2696		0.3070	0.2771		0.3109	0.2846		0.3148	0.2921		0.3187	0.2996		0.3226	0.3071
D7	0.3021	0.2587	E7	0.3060	0.2662	F7	0.3099	0.2737	G7	0.3138	0.2812	H7	0.3177	0.2887	J7	0.3216	0.2962
	0.2992	0.2621		0.3031	0.2696		0.3070	0.2771		0.3109	0.2846		0.3148	0.2921		0.3187	0.2996
	0.3031	0.2696		0.3070	0.2771		0.3109	0.2846		0.3148	0.2921		0.3187	0.2996		0.3226	0.3071
	0.3060	0.2662		0.3099	0.2737		0.3138	0.2812		0.3177	0.2887		0.3216	0.2962		0.3255	0.3037
D8	0.3051	0.2556	E8	0.3090	0.2631	F8	0.3129	0.2706	G8	0.3168	0.2781	H8	0.3207	0.2856	J8	0.3246	0.2931
	0.3021	0.2587		0.3060	0.2662		0.3099	0.2737		0.3138	0.2812		0.3177	0.2887		0.3216	0.2962
	0.3060	0.2662		0.3099	0.2737		0.3138	0.2812		0.3177	0.2887		0.3216	0.2962		0.3255	0.3037
	0.3090	0.2631		0.3129	0.2706		0.3168	0.2781		0.3207	0.2856		0.3246	0.2931		0.3285	0.3006

Bin Code of Chromaticity Coordinates

Bin	CIE_x	CIE_y	Bin	CIE_x	CIE_y	Bin	CIE_x	CIE_y	Bin	CIE_x	CIE_y	Bin	CIE_x	CIE_y
51	0.2507	0.2228	61	0.2575	0.2269	71	0.2585	0.2378	81	0.2653	0.2419	91	0.2692	0.2494
	0.2536	0.2194		0.2546	0.2303		0.2614	0.2344		0.2624	0.2453		0.2663	0.2528
	0.2575	0.2269		0.2585	0.2378		0.2653	0.2419		0.2663	0.2528		0.2702	0.2603
	0.2546	0.2303		0.2614	0.2344		0.2624	0.2453		0.2692	0.2494		0.2731	0.2569
52	0.2536	0.2194	62	0.2604	0.2235	72	0.2614	0.2344	82	0.2682	0.2385	92	0.2721	0.2460
	0.2565	0.2160		0.2575	0.2269		0.2643	0.2310		0.2653	0.2419		0.2692	0.2494
	0.2604	0.2235		0.2614	0.2344		0.2682	0.2385		0.2692	0.2494		0.2731	0.2569
	0.2575	0.2269		0.2643	0.2310		0.2653	0.2419		0.2721	0.2460		0.2760	0.2535
53	0.2565	0.2160	63	0.2633	0.2201	73	0.2643	0.2310	83	0.2711	0.2351	93	0.2750	0.2426
	0.2594	0.2126		0.2604	0.2235		0.2672	0.2276		0.2682	0.2385		0.2721	0.2460
	0.2633	0.2201		0.2643	0.2310		0.2711	0.2351		0.2721	0.2460		0.2760	0.2535
	0.2604	0.2235		0.2672	0.2276		0.2682	0.2385		0.2750	0.2426		0.2789	0.2501
54	0.2594	0.2126	64	0.2662	0.2167	74	0.2672	0.2276	84	0.2740	0.2317	94	0.2779	0.2392
	0.2623	0.2092		0.2633	0.2201		0.2701	0.2242		0.2711	0.2351		0.2750	0.2426
	0.2662	0.2167		0.2672	0.2276		0.2740	0.2317		0.2750	0.2426		0.2789	0.2501
	0.2633	0.2201		0.2701	0.2242		0.2711	0.2351		0.2779	0.2392		0.2818	0.2467
55	0.2623	0.2092	65	0.2691	0.2133	75	0.2701	0.2242	85	0.2769	0.2283	95	0.2808	0.2358
	0.2652	0.2058		0.2662	0.2167		0.2730	0.2208		0.2740	0.2317		0.2779	0.2392
	0.2691	0.2133		0.2701	0.2242		0.2769	0.2283		0.2779	0.2392		0.2818	0.2467
	0.2662	0.2167		0.2730	0.2208		0.2740	0.2317		0.2808	0.2358		0.2847	0.2433
56	0.2652	0.2058	66	0.2720	0.2099	76	0.2730	0.2208	86	0.2798	0.2249	96	0.2837	0.2324
	0.2681	0.2024		0.2691	0.2133		0.2759	0.2174		0.2769	0.2283		0.2808	0.2358
	0.2720	0.2099		0.2730	0.2208		0.2798	0.2249		0.2808	0.2358		0.2847	0.2433
	0.2691	0.2133		0.2759	0.2174		0.2769	0.2283		0.2837	0.2324		0.2876	0.2399
57	0.2681	0.2024	67	0.2749	0.2065	77	0.2759	0.2174	87	0.2827	0.2215	97	0.2866	0.2290
	0.2710	0.1990		0.2720	0.2099		0.2788	0.2140		0.2798	0.2249		0.2837	0.2324
	0.2749	0.2065		0.2759	0.2174		0.2827	0.2215		0.2837	0.2324		0.2876	0.2399
	0.2720	0.2099		0.2788	0.2140		0.2798	0.2249		0.2866	0.2290		0.2905	0.2365
58	0.2710	0.1990	68	0.2778	0.2031	78	0.2788	0.2140	88	0.2856	0.2181	98	0.2895	0.2256
	0.2739	0.1956		0.2749	0.2065		0.2817	0.2106		0.2827	0.2215		0.2866	0.2290
	0.2778	0.2031		0.2788	0.2140		0.2856	0.2181		0.2866	0.2290		0.2905	0.2365
	0.2749	0.2065		0.2817	0.2106		0.2827	0.2215		0.2895	0.2256		0.2934	0.2331

Luminous Flux

Unit : lm

Bin	Min.	Max.
L11	11.00	12.00
L12	12.00	13.00
L13	13.00	14.00
L14	14.00	15.00
L15	15.00	16.00
L16	16.00	17.00
L17	17.00	18.00
L18	18.00	19.00
L19	19.00	20.00
L20	20.00	21.00
L21	21.00	22.00

Note: Tolerance of Luminous Intensity: ±7%

V_F (Forward Voltage Spec. Setup)


Unit : V

Groups					Bin	Min.	Max.	
					Y	4-2-3	2.7	2.8
						5-1-3	2.8	2.9
K	H	E				5-2-3	2.9	3.0
						6-1-3	3.0	3.1
			Q	F		6-2-3	3.1	3.2
						7-1-3	3.2	3.3
						7-2-3	3.3	3.4

TECHNICAL DATA

SMD LED (62 SERIES) BRIGHTNESS BIN SELECTION

Chromaticity Diagram

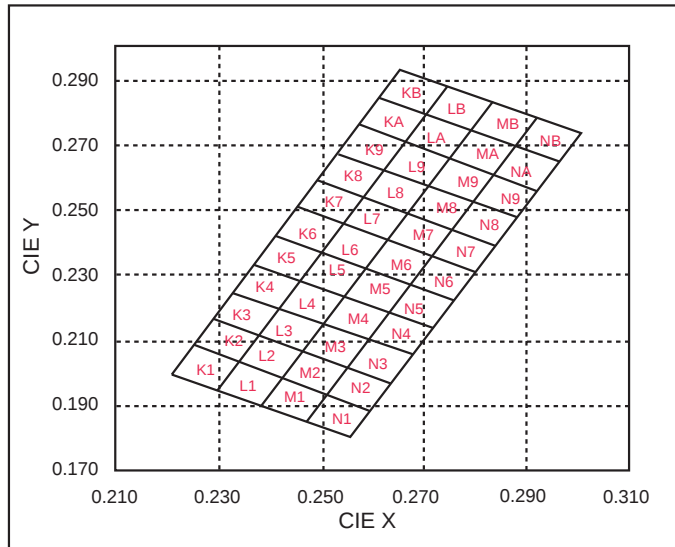

Bin Code of Chromaticity Coordinates

Bin	CIE_x	CIE_y	Bin	CIE_x	CIE_y	Bin	CIE_x	CIE_y	Bin	CIE_x	CIE_y	Bin	CIE_x	CIE_y	Bin	CIE_x	CIE_y	Bin	CIE_x	CIE_y
KY	0.2165	0.1914	KZ	0.2206	0.1998	K1	0.2247	0.2082	K2	0.2288	0.2166	K3	0.2329	0.2250	K4	0.2457	0.2287	K5	0.2410	0.2419
	0.2124	0.1829		0.2165	0.1913		0.2206	0.1997		0.2247	0.2082		0.2288	0.2166		0.2416	0.2202		0.2370	0.2335
	0.2211	0.1781		0.2252	0.1865		0.2293	0.1949		0.2334	0.2034		0.2375	0.2118		0.2329	0.2250		0.2457	0.2288
	0.2252	0.1866		0.2293	0.1950		0.2334	0.2034		0.2375	0.2118		0.2416	0.2202		0.2370	0.2335		0.2497	0.2371
LY	0.2252	0.1866	LZ	0.2293	0.1950	L1	0.2334	0.2034	L2	0.2375	0.2118	L3	0.2416	0.2202	L4	0.2544	0.2239	L5	0.2497	0.2371
	0.2211	0.1781		0.2252	0.1865		0.2293	0.1949		0.2334	0.2034		0.2375	0.2118		0.2503	0.2154		0.2457	0.2287
	0.2298	0.1733		0.2339	0.1817		0.2380	0.1901		0.2421	0.1986		0.2462	0.2070		0.2416	0.2202		0.2544	0.2239
	0.2339	0.1818		0.2380	0.1902		0.2421	0.1986		0.2462	0.2070		0.2503	0.2154		0.2457	0.2287		0.2584	0.2323
MY	0.2339	0.1818	MZ	0.2380	0.1902	M1	0.2421	0.1986	M2	0.2462	0.2070	M3	0.2503	0.2154	M4	0.2631	0.2191	M5	0.2584	0.2323
	0.2298	0.1733		0.2339	0.1817		0.2380	0.1901		0.2421	0.1986		0.2462	0.2070		0.2590	0.2106		0.2544	0.2239
	0.2385	0.1685		0.2426	0.1769		0.2467	0.1853		0.2508	0.1938		0.2549	0.2022		0.2503	0.2154		0.2631	0.2191
	0.2426	0.1770		0.2467	0.1854		0.2508	0.1938		0.2549	0.2022		0.2590	0.2106		0.2544	0.2239		0.2671	0.2275
NY	0.2426	0.1770	NZ	0.2467	0.1854	N1	0.2508	0.1938	N2	0.2549	0.2022	N3	0.2590	0.2106	N4	0.2718	0.2143	N5	0.2671	0.2275
	0.2385	0.1685		0.2426	0.1769		0.2467	0.1853		0.2508	0.1938		0.2549	0.2022		0.2677	0.2058		0.2631	0.2191
	0.2472	0.1637		0.2513	0.1721		0.2554	0.1805		0.2595	0.1890		0.2636	0.1974		0.2590	0.2106		0.2718	0.2143
	0.2513	0.1722		0.2554	0.1806		0.2595	0.1890		0.2636	0.1974		0.2677	0.2058		0.2631	0.2191		0.2758	0.2227
K6	0.2451	0.2504	K7	0.2492	0.2588	K8	0.2533	0.2672	K9	0.2574	0.2757	KA	0.2615	0.2842	KB	0.2656	0.2927	KC	0.2697	0.3012
	0.2410	0.2419		0.2451	0.2504		0.2492	0.2588		0.2533	0.2672		0.2574	0.2757		0.2615	0.2842		0.2656	0.2927
	0.2497	0.2371		0.2538	0.2456		0.2579	0.2540		0.2620	0.2624		0.2661	0.2709		0.2702	0.2794		0.2743	0.2879
	0.2538	0.2456		0.2579	0.2540		0.2620	0.2624		0.2661	0.2709		0.2702	0.2794		0.2743	0.2879		0.2784	0.2964
L6	0.2538	0.2456	L7	0.2579	0.2540	L8	0.2620	0.2624	L9	0.2661	0.2709	LA	0.2702	0.2794	LB	0.2743	0.2879	LC	0.2784	0.2964
	0.2497	0.2371		0.2538	0.2456		0.2579	0.2540		0.2620	0.2624		0.2661	0.2709		0.2702	0.2794		0.2743	0.2879
	0.2584	0.2323		0.2625	0.2408		0.2666	0.2492		0.2707	0.2576		0.2748	0.2661		0.2789	0.2746		0.2830	0.2831
	0.2625	0.2408		0.2666	0.2492		0.2707	0.2576		0.2748	0.2661		0.2789	0.2746		0.2830	0.2831		0.2871	0.2946
M6	0.2625	0.2408	M7	0.2666	0.2492	M8	0.2707	0.2576	M9	0.2748	0.2661	MA	0.2789	0.2746	MB	0.2830	0.2831	MC	0.2871	0.2946
	0.2584	0.2323		0.2625	0.2408		0.2666	0.2492		0.2707	0.2576		0.2748	0.2661		0.2789	0.2746		0.2830	0.2831
	0.2671	0.2275		0.2712	0.2360		0.2753	0.2444		0.2794	0.2528		0.2835	0.2613		0.2876	0.2698		0.2917	0.2783
	0.2712	0.2360		0.2753	0.2444		0.2794	0.2528		0.2835	0.2613		0.2876	0.2698		0.2917	0.2783		0.2958	0.2868
N6	0.2712	0.2360	N7	0.2753	0.2444	N8	0.2794	0.2528	N9	0.2835	0.2613	NA	0.2876	0.2698	NB	0.2917	0.2783	NC	0.2958	0.2868
	0.2671	0.2275		0.2712	0.2360		0.2753	0.2444		0.2794	0.2528		0.2835	0.2613		0.2876	0.2698		0.2917	0.2783
	0.2758	0.2227		0.2799	0.2312		0.2840	0.2396		0.2881	0.2480		0.2922	0.2565		0.2963	0.2650		0.3004	0.2735
	0.2799	0.2312		0.2840	0.2396		0.2881	0.2480		0.2922	0.2565		0.2963	0.2650		0.3004	0.2735			

Luminous Flux

Unit : lm

1 lm / Bin									2 lm / Bin					
Bin	CIE_x	CIE_y	Bin	CIE_x	CIE_y	Bin	CIE_x	CIE_y	Bin	CIE_x	CIE_y	Bin	CIE_x	CIE_y
18	18	19	18	18	19	18	18	19	T18	18	20	T50	50	52
19	19	20	19	19	20	19	19	20	T20	20	22	T52	52	54
20	20	21	20	20	21	20	20	21	T22	22	24	T54	54	56
21	21	22	21	21	22	21	21	22	T24	24	26	T56	56	58
22	22	23	22	22	23	22	22	23	T26	26	28	T58	58	60
23	23	24	23	23	24	23	23	24	T28	28	30	T60	60	62
24	24	25	24	24	25	24	24	25	T30	30	32	T62	62	64
25	25	26	25	25	26	25	25	26	T32	32	34	T64	64	66
26	26	27	26	26	27	26	26	27	T34	34	36	T66	66	68
27	27	28	27	27	28	27	27	28	T36	36	38	T68	68	70
28	28	29	28	28	29	28	28	29	T38	38	40	T70	70	72
29	29	30	29	29	30	29	29	30	T40	40	42	T72	72	74
30	30	31	30	30	31	30	30	31	T42	42	44	T74	74	76
31	31	32	31	31	32	31	31	32	T44	44	46	T76	76	78
32	32	33	32	32	33	32	32	33	T46	46	48	T78	78	80
33	33	34	33	33	34	33	33	34	T48	48	50	T80	80	82

Note: Tolerance of Luminous Intensity: $\pm 7\%$

V_F (Forward Voltage Spec. Setup)

Unit : V

Single Chip			Two Chips					
			Parallel			Serial		
Bin	Min.	Max.	Bin	Min.	Max.	Bin	Min.	Max.
A	2.9	3.0	PA	2.9	3.0	S8	5.8	6.0
B	3.0	3.1	PB	3.0	3.1	S9	6.0	6.2
C	3.1	3.2	PC	3.1	3.2	SA	6.2	6.4
D	3.2	3.3	PD	3.2	3.3	SB	6.4	6.6
E	3.3	3.4	PE	3.3	3.4	SC	6.6	6.8
F	3.4	3.5	PF	3.4	3.5	SD	6.8	7.0
G	3.5	3.6	PG	3.5	3.6	SE	7.0	7.2

Note: Tolerance of Forward Voltage: $\pm 0.05V$

TECHNICAL DATA


SMD LED (AUTOMOTIVE APPLICATION) BRIGHTNESS BIN SELECTION

Bin Range of Chromaticity Coordinates

($I_F=20\text{mA}$ / $T_a=25^\circ\text{C}$)

Color Ranks		CIE			
A1	X	0.255	0.264	0.280	0.270
	Y	0.245	0.267	0.248	0.230
A0	X	0.264	0.283	0.296	0.280
	Y	0.267	0.305	0.267	0.248
B3	X	0.283	0.304	0.307	0.287
	Y	0.305	0.330	0.315	0.295
B4	X	0.304	0.330	0.330	0.307
	Y	0.330	0.360	0.339	0.315
B5	X	0.287	0.307	0.311	0.296
	Y	0.295	0.315	0.294	0.276
B6	X	0.307	0.330	0.330	0.311
	Y	0.315	0.339	0.318	0.294
C0	X	0.330	0.361	0.355	0.330
	Y	0.360	0.385	0.350	0.318

Note: Measurement uncertainty of the color coordinates ± 0.01

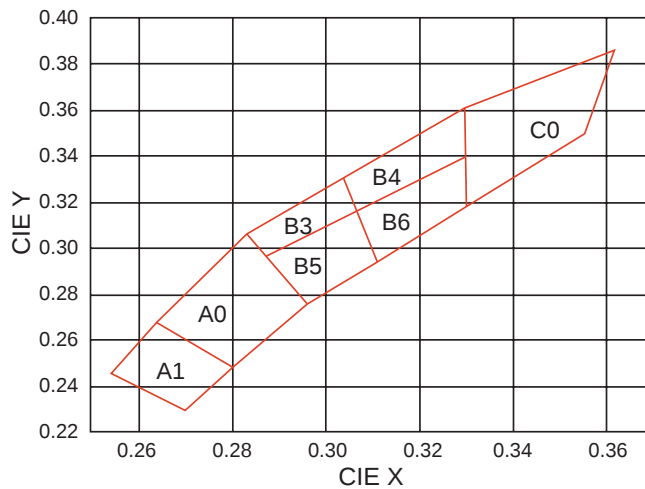

Bin Range of Luminous Intensity

Unit : mcd

Group	Bin	Min	Max
C	C1	0.28	0.36
	C2	0.36	0.45
D	D1	0.45	0.56
	D2	0.56	0.71
E	E1	0.71	0.9
	E2	0.9	1.12
F	F1	1.12	1.4
	F2	1.4	1.8
G	G1	1.8	2.24
	G2	2.24	2.8
H	H1	2.8	3.55
	H2	3.55	4.5
J	J1	4.5	5.6
	J2	5.6	7.1
K	K1	7.1	9
	K2	9	11.2
L	L1	11.2	14
	L2	14	18
M	M1	18	22.4
	M2	22.4	28
N	N1	28	35.5
	N2	35.5	45
P	P1	45	56
	P2	56	71
Q	Q1	71	90
	Q2	90	112
R	R1	112	140
	R2	140	180
S	S1	180	224
	S2	224	280
T	T1	280	355
	T2	355	450
U	U1	450	560
	U2	560	710
V	V1	710	900
	V2	900	1120
AW	AA	1120	1400
	AB	1400	1800
BW	BA	1800	2240
	BB	2240	2800
CW	CA	2800	3550
	CB	3550	4500
DW	DA	4500	5600
	DB	5600	7100
EW	EA	7100	9000
	EB	9000	11200
FW	FA	11200	14000
	FB	14000	18000
GW	GA	18000	22400
	GB	22400	28000
HW	HA	28000	35500
	HB	35500	45000
IW	IA	45000	56000
	IB	56000	71000

SUPER FLUX LED BRIGHTNESS BIN SELECTION

Bin Range of Total Flux

Unit : lm

Group	Bin	Min	Max	Group	Bin	Min	Max
A	A1	6	8	N	N1	715	900
	A2	8	10		N2	900	1125
B	B1	10	12.5	P	P1	1125	1425
	B2	12.5	15		P2	1425	1800
C	C1	15	18	Q	Q1	1800	2250
	C2	18	22		Q2	2250	2850
D	D1	22	28	R	R1	2850	3600
	D2	28	35		R2	3600	4500
E	E1	35	42	S	S1	4500	5650
	E2	42	50		S2	5650	7150
F	F1	50	60	T	T1	7150	9000
	F2	60	70		T2	9000	11250
G	G1	70	85	U	U1	11250	14250
	G2	85	100		U2	14250	18000
H	H1	100	120	V	V1	18000	22500
	H2	120	140		V2	22500	28500
J	J1	140	170	W	W1	28500	36000
	J2	170	200		W2	36000	43200
K	K1	200	240	X	X1	43200	51840
	K2	240	285		X2	51840	62200
L	L1	285	360	Y	Y1	62200	74600
	L2	360	450		Y2	74600	87500
M	M1	450	565				
	M2	565	715				


Note: Tolerance of Forward Voltage: $\pm 0.05V$

Color Ranks

($I_F=20mA$ / $T_a=25^\circ C$)

Color Ranks		CIE			
A1	X	0.255	0.264	0.280	0.270
	Y	0.245	0.267	0.248	0.230
A0	X	0.264	0.283	0.296	0.280
	Y	0.267	0.305	0.267	0.248
B3	X	0.283	0.304	0.307	0.287
	Y	0.305	0.330	0.315	0.295
B4	X	0.304	0.330	0.330	0.307
	Y	0.330	0.360	0.339	0.315
B5	X	0.287	0.307	0.311	0.296
	Y	0.295	0.315	0.294	0.276
B6	X	0.307	0.330	0.330	0.311
	Y	0.315	0.339	0.318	0.294
C0	X	0.330	0.361	0.355	0.330
	Y	0.360	0.385	0.350	0.318

Note: Measurement uncertainty of the color coordinates ± 0.01

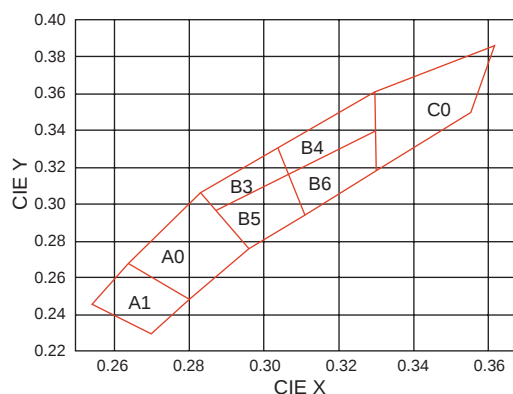

V_F (Forward Voltage Spec. Setup)

Unit : V

Groups											Code	Min.	Max.	Groups				Code	Min.	Max.				
A							J	I	N	K	M	U	0	1.7	1.9	1				9	1.8	2.0		
													1	1.9	2.1					A	2.0	2.2		
													2	2.1	2.3					B	2.2	2.4		
B	C	L	F	D	G	H	J	I	N	K	M	U	3	2.3	2.5					C	2.4	2.6		
													4	2.5	2.7					D	2.6	2.8		
													5	2.7	2.9	2	3		4	5	6	E	2.8	3.0
													6	2.9	3.1							F	3.0	3.2
													7	3.1	3.3				G	3.2		3.4		
													8	3.3	3.5				H	3.4		3.6		
																			J	3.6	3.8			
																			K	3.8	4.0			
																			L	4.0	4.2			

TECHNICAL DATA

LED LAMPS BRIGHTNESS BIN SELECTION

Brightness Bin Selection

Unit : mcd


Item	Intensity Iv (mcd)	
Bin Code	Min.	Max.
a7	6.0	8.0
a6	8.0	10.0
a5	10.0	12.0
a4	12.0	15.0
a3	15.0	18.0
a2	18.0	22.0
a1	22.0	28.0
0	28.0	35.0
1	35.0	42.0
2	42.0	50.0
3	50.0	60.0
4	60.0	70.0
5	70.0	85.0
6	85.0	100
7	100	120
8	120	140
9	140	170
A	170	200
B	200	240
C	240	285
D	285	360
E	360	450
F	450	565
G	565	715
H	715	900
J	900	1,125
K	1,125	1,425
L	1,425	1,800
M	1,800	2,250
N	2,250	2,850
P	2,850	3,600
Q	3,600	4,500
R	4,500	5,650
S	5,650	7,150
T	7,150	9,000
U	9,000	11,250
V	11,250	14,250
W	14,250	18,000
X	18,000	22,500
Y	22,500	28,500
Z	28,500	36,000

Cool White / CIE Chromaticity Diagram

($I_F=20\text{mA}$ / $T_a=25^\circ\text{C}$)

Color Ranks		CIE			
A1	X	0.255	0.264	0.280	0.270
	Y	0.245	0.267	0.248	0.230
A0	X	0.264	0.283	0.296	0.280
	Y	0.267	0.305	0.267	0.248
B3	X	0.283	0.304	0.307	0.287
	Y	0.305	0.330	0.315	0.295
B4	X	0.304	0.330	0.330	0.307
	Y	0.330	0.360	0.339	0.315
B5	X	0.287	0.307	0.311	0.296
	Y	0.295	0.315	0.294	0.276
B6	X	0.307	0.330	0.330	0.311
	Y	0.315	0.339	0.318	0.294
C0	X	0.330	0.361	0.355	0.330
	Y	0.360	0.385	0.350	0.318

Note: Measurement uncertainty of the color coordinates ± 0.01

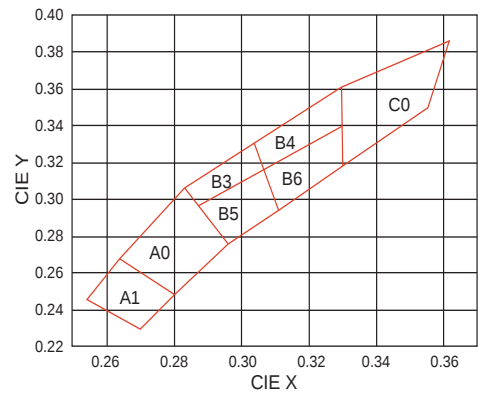


Warm White / CIE Chromaticity Diagram

($I_F=20\text{mA}$ / $T_a=25^\circ\text{C}$)


Color Ranks		CIE			
D1	X	0.357	0.361	0.398	0.389
	Y	0.361	0.385	0.411	0.382
D2	X	0.354	0.357	0.389	0.382
	Y	0.340	0.361	0.382	0.358
E1	X	0.389	0.398	0.439	0.425
	Y	0.382	0.411	0.431	0.400
E2	X	0.382	0.389	0.425	0.412
	Y	0.358	0.382	0.400	0.372
F1	X	0.425	0.439	0.497	0.477
	Y	0.400	0.431	0.466	0.413
F2	X	0.412	0.425	0.477	0.458
	Y	0.372	0.400	0.413	0.383

Note: Measurement uncertainty of the color coordinates ± 0.01

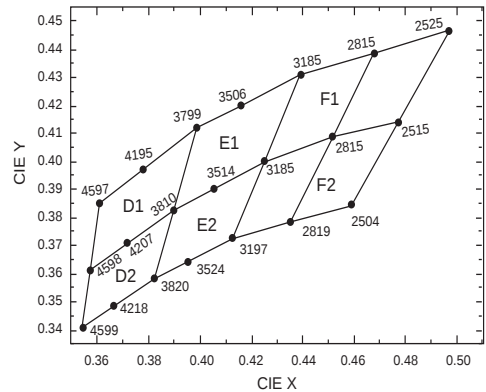

LED LAMPs (AUTOMOTIVE APPLICATION) BRIGHTNESS BIN SELECTION

Cool White / CIE

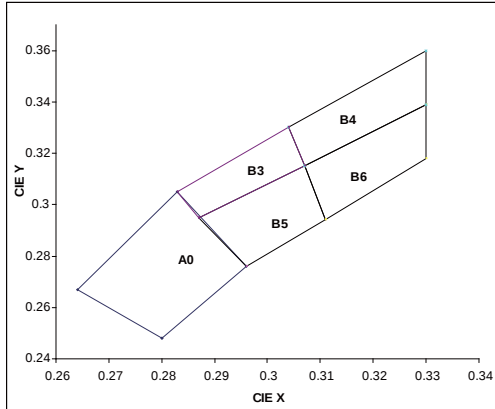


Bin Code of Chromaticity Coordinates

Rank	CIE_x	CIE_y	Rank	CIE_x	CIE_y
A0	0.280	0.248	A1	0.255	0.245
	0.264	0.267		0.264	0.267
	0.283	0.305		0.28	0.248
	0.296	0.276		0.27	0.23
B3	0.287	0.295	B4	0.307	0.315
	0.283	0.305		0.304	0.330
	0.304	0.330		0.330	0.360
	0.307	0.315		0.330	0.339
B5	0.296	0.276	B6	0.311	0.294
	0.287	0.295		0.307	0.315
	0.307	0.315		0.330	0.339
	0.311	0.294		0.330	0.318
C0	0.330	0.318			
	0.330	0.360			
	0.361	0.385			
	0.356	0.351			

Brightness Bin Selection

Item	Intensity Iv (mcd)	
Bin Code	Min.	Max.
a7	6.0	8.0
a6	8.0	10.0
a5	10.0	12.5
a4	12.5	15.0
a3	15.0	18.0
a2	18.0	22.0
a1	22.0	28.0
0	28.0	35.0
1	35.0	42.0
2	42.0	50.0
3	50.0	60.0
4	60.0	70.0
5	70.0	85.0
6	85.0	100
7	100	120
8	120	140
9	140	170
A	170	200
B	200	240
C	240	285
D	285	360
E	360	450
F	450	565
G	565	715
H	715	900
J	900	1,125
K	1,125	1,425
L	1,425	1,800
M	1,800	2,250
N	2,250	2,850
P	2,850	3,600
Q	3,600	4,500
R	4,500	5,650
S	5,650	7,150
T	7,150	9,000
U	9,000	11,250
V	11,250	14,250
W	14,250	18,000
X	18,000	22,500
Y	22,500	28,500
Z	28,500	36,000
Z1	36,000	43,200

Warm White / CIE



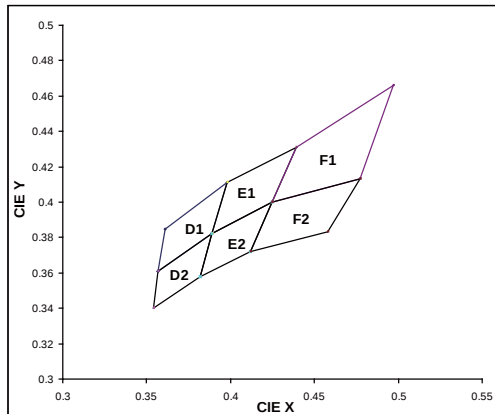


Bin Code of Chromaticity Coordinates

Rough Rank	Detailed Rank	CIE			
D1	D1-1	X	0.3575	0.3610	0.3780
		Y	0.3612	0.3850	0.3970
	D1-2	X	0.3720	0.3780	0.3988
		Y	0.3714	0.3970	0.4116
D2	D2-1	X	0.3545	0.3575	0.3720
		Y	0.3408	0.3612	0.3714
	D2-2	X	0.3667	0.3720	0.3897
		Y	0.3484	0.3714	0.3823
E1	E1-1	X	0.3897	0.3988	0.4162
		Y	0.3823	0.4116	0.4200
	E1-2	X	0.4053	0.4162	0.4390
		Y	0.3907	0.4200	0.4310
E2	E2-1	X	0.3822	0.3897	0.4053
		Y	0.3580	0.3823	0.3907
	E2-2	X	0.3954	0.4053	0.4255
		Y	0.3642	0.3907	0.4000
F1	F1-1	X	0.4250	0.4390	0.4550
		Y	0.4000	0.4310	0.4350
	F1-2	X	0.4400	0.4550	0.4770
		Y	0.4050	0.4350	0.4400
	F1-3	X	0.4600	0.4770	0.4970
		Y	0.4100	0.4400	0.4470
F2	F2-1	X	0.4130	0.4260	0.4400
		Y	0.3730	0.4000	0.4050
	F2-2	X	0.4260	0.4400	0.4600
		Y	0.3770	0.4050	0.4100
	F2-3	X	0.4430	0.4600	0.4770
		Y	0.3800	0.4100	0.4140

TECHNICAL DATA

LED LAMPs (AUTOMOTIVE APPLICATION) BRIGHTNESS BIN SELECTION

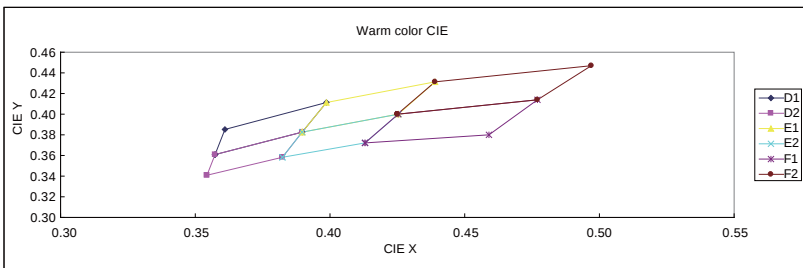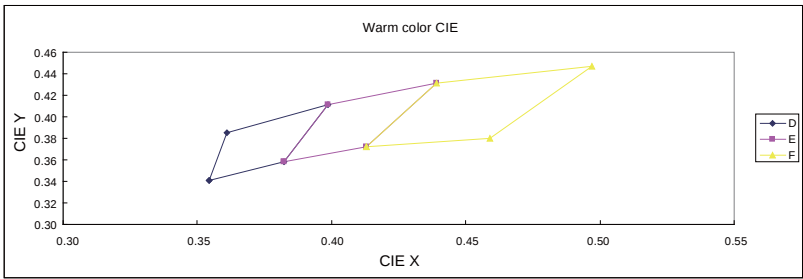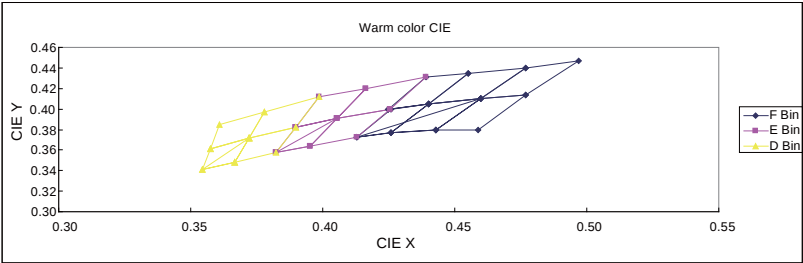

	Rank	CIE_x	CIE_y
D	1	0.3545	0.3408
	2	0.3610	0.3850
	3	0.3988	0.4116
	4	0.3822	0.3580
E	1	0.3822	0.3580
	2	0.3988	0.4116
	3	0.4390	0.4310
	4	0.4129	0.3725
F	1	0.4129	0.3725
	2	0.4390	0.4310
	3	0.4970	0.4470
	4	0.4590	0.3800

	Rank	CIE_x	CIE_y
D1	1	0.3575	0.3612
	2	0.3610	0.3850
	3	0.3988	0.4116
	4	0.3897	0.3823
D2	1	0.3545	0.3408
	2	0.3575	0.3612
	3	0.3897	0.3823
	4	0.3822	0.3580
E1	1	0.3897	0.3823
	2	0.3988	0.4116
	3	0.4390	0.4310
	4	0.4255	0.4000
E2	1	0.3822	0.3580
	2	0.3897	0.3823
	3	0.4255	0.4000
	4	0.4129	0.3725
F1	1	0.4129	0.3725
	2	0.4255	0.4000
	3	0.4770	0.4140
	4	0.4590	0.3800
F2	1	0.4250	0.4000
	2	0.4390	0.4310
	3	0.4970	0.4470
	4	0.4770	0.4140

DIGITAL DISPLAY BRIGHTNESS BIN SELECTION

Bin Code	Brightness Range (μcd)	
	Min.	Max.
C	70	140
D	110	220
E	180	360
F	280	560
G	450	900
H	750	1200
J	1050	1680
K	1400	2300
L	2000	3200
M	2800	4500
N	4000	6400
P	5600	8900
Q	7800	12500
R	11000	17600
S	15000	24000
T	21000	34000
U	30000	48000
V	42000	67000
W	59000	94000
X	83000	133000
Y	116000	186000
Z	158800	254000



VISIBLE LED



46 HIGH POWER LED

57 LOW POWER LED

61 FLASH LED

65 SMD LED

111 SUPER FLUX LED

113 LED LAMPs

135 LED DIGITAL DISPLAYs


153 SIGNAGE LED

High Power LED ■ HV (1W, 2W, 4W)




1W / 20mA

UNIT : mm

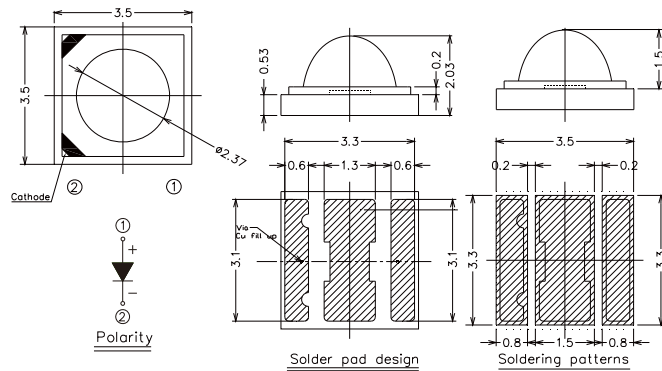


Product	Size (LXWXHmm)	Color	CCT (K)	Typ. Luminous Flux (lm)	CRI (min.)	Forward Voltage (V)
EZHV-F81C1-1LPGS-F6500	3.5x3.5x2.03	○ Cool White	6500	90	70	47 -55 VDC
EZHV-F81C1-1LPGS-F5700	3.5x3.5x2.03	○ Cool White	5700	90	70	47 -55 VDC
EZHV-F61M1-1LPHS-F3000	3.5x3.5x2.03	● Warm White	3000	70	80	47 -55 VDC
*EZHV-F91C1-*****-F6500	3.5x3.5x2.03	○ Cool White	6500	100	70	47 -55 VDC
*EZHV-F91C1-*****-F5700	3.5x3.5x2.03	○ Cool White	5700	100	70	47 -55 VDC
*EZHV-F71M1-*****-F3000	3.5x3.5x2.03	● Warm White	3000	80	80	47 -55 VDC

*Please contact EVERLIGHT sales for more detail product information.

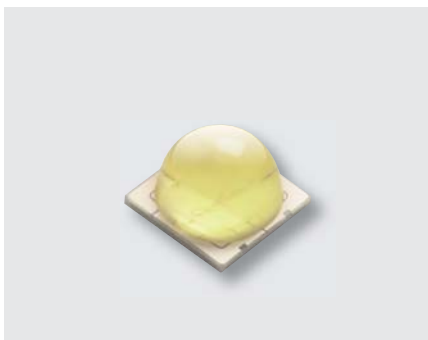

2W / 20mA

UNIT : mm

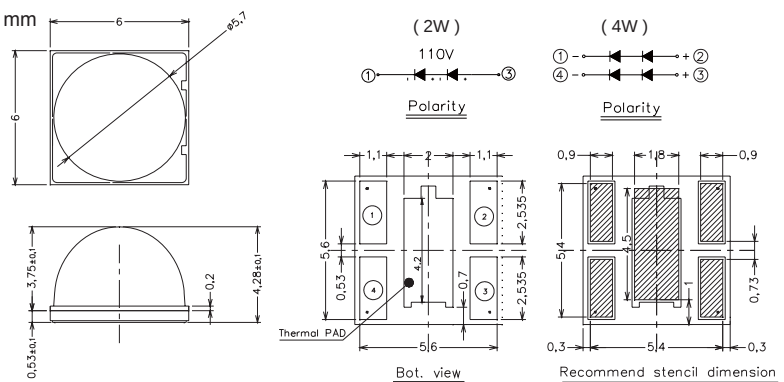

Product	Size (LXWXHmm)	Color	CCT (K)	Typ. Luminous Flux (lm)	CRI (min.)	Forward Voltage (V)
EZHV-J31M2-2LPHS-F3000	6.0x6.0x4.28	● Warm White	3000	130	80	95 -111 VDC
EZHV-J31M2-2LPHS-F2700	6.0x6.0x4.28	● Warm White	2700	130	80	95 -111 VDC
*EZHV-J41M2-*****-F3000	6.0x6.0x4.28	● Warm White	3000	140	80	95 -111 VDC
*EZHV-J41M2-*****-F2700	6.0x6.0x4.28	● Warm White	2700	140	80	95 -111 VDC


*Please contact EVERLIGHT sales for more detail product information.

4W / 40mA


Product	Size (LXWXHmm)	Color	CCT (K)	Typ. Luminous Flux (lm)	CRI (min.)	Forward Voltage (V)
EZHV-K51C4-2LPGS-F6500	6.0x6.0x4.28	○ Cool White	6500	350	70	95 -111 VDC
EZHV-K51C4-2LPGS-F5700	6.0x6.0x4.28	○ Cool White	5700	350	70	95 -111 VDC
EZHV-K21M4-2LPHS-F3000	6.0x6.0x4.28	● Warm White	3000	275	80	95 -111 VDC
*EZHV-K61C4-*****-F6500	6.0x6.0x4.28	○ Cool White	6500	375	70	95 -111 VDC
*EZHV-K61C4-*****-F5700	6.0x6.0x4.28	○ Cool White	5700	375	70	95 -111 VDC
*EZHV-K31M4-*****-F3000	6.0x6.0x4.28	● Warm White	3000	300	80	95 -111 VDC

*Please contact EVERLIGHT sales for more detail product information.

High Power LED ■ COB (6.4W, 8W, 12W)

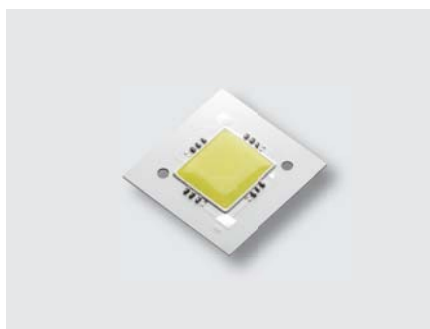

UNIT : mm

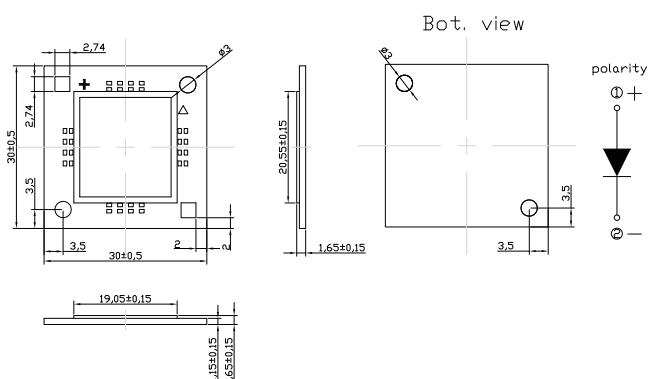

6.4W / 300mA

Product	Size (LXWXHmm)	Color	CCT (K)	Typ. Luminous Flux (lm)	CRI (min.)	Forward Voltage (V)
ELCOB-N40C6-0LTGE-C5000	30x30x1.65	○ Cool White	5000	610	65	19.5 -24 VDC
ELCOB-N50M6-0LTJE-C2700	30x30x1.65	● Warm White	2700	625	80	19.5 -24 VDC

8W / 370mA

Product	Size (LXWXHmm)	Color	CCT (K)	Typ. Luminous Flux (lm)	CRI (min.)	Forward Voltage (V)
ELCOB-N70C8-0LTGE-C5000	30x30x1.65	○ Cool White	5000	760	65	19.5 -24 VDC
ELCOB-N70M8-0LTJE-C2700	30x30x1.65	● Warm White	2700	775	80	19.5 -24 VDC

12W / 560mA


Product	Size (LXWXHmm)	Color	CCT (K)	Typ. Luminous Flux (lm)	CRI (min.)	Forward Voltage (V)
*ELCOB-P30CC-*****-C5000	30x30x1.65	○ Cool White	5000	1100	65	19.5 -24 VDC
*ELCOB-P30MC-*****-C2700	30x30x1.65	● Warm White	2700	1100	80	19.5 -24 VDC

*Please contact EVERLIGHT sales for more detail product information.

High Power LED ■ Shuen炫 (1W, 3W)



UNIT : mm

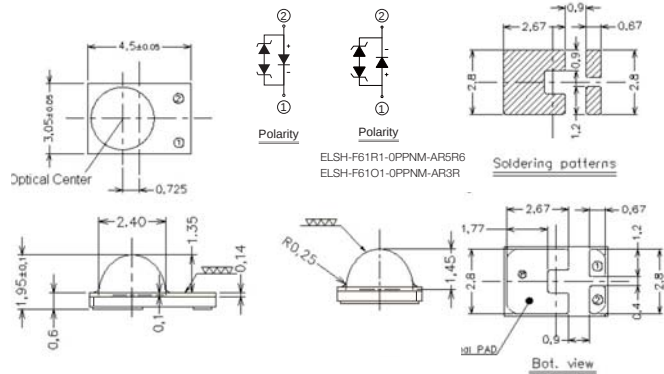

1W / 350mA

Product	Size (LXWXHmm)	Color	CCT (K)	Typ. Luminous Flux (lm)	CRI (min.)	Forward Voltage (V)
ELSH-F91C1-0LPGS-C6500	3.05x4.5x1.95	○ Cool White	6500	95	70	2.95~3.85
ELSH-J11C1-0CPGS-C6500	3.05x4.5x1.95	○ Cool White	6500	105	70	2.65~3.55
ELSH-J21C1-0VPGS-C6500	3.05x4.5x1.95	○ Cool White	6500	115	70	2.65~3.55
ELSH-J11C1-0VPHS-C6500	3.05x4.5x1.95	○ Cool White	6500	105	80	2.65~3.55
ELSH-F91C1-0LPGS-C5700	3.05x4.5x1.95	○ Cool White	5700	95	70	2.95~3.85
ELSH-J11C1-1LPGS-C5700	3.05x4.5x1.95	○ Cool White	5700	105	70	2.95~3.85
ELSH-J21C1-1LPGS-C5700	3.05x4.5x1.95	○ Cool White	5700	115	70	2.95~3.85
ELSH-J11C1-0CPGS-C5700	3.05x4.5x1.95	○ Cool White	5700	105	70	2.65~3.55
ELSH-J21C1-0VPGS-C5700	3.05x4.5x1.95	○ Cool White	5700	115	70	2.65~3.55
ELSH-J11C1-0VPHS-C5700	3.05x4.5x1.95	○ Cool White	5700	105	80	2.65~3.55
ELSH-F81C1-0LPGS-C5000	3.05x4.5x1.95	○ Cool White	5000	85	70	2.95~3.85
ELSH-F91C1-0CPGS-C5000	3.05x4.5x1.95	○ Cool White	5000	95	70	2.65~3.55
ELSH-J11C1-0VPGS-C5000	3.05x4.5x1.95	○ Cool White	5000	105	70	2.65~3.55
ELSH-J21C1-0CPGS-C5000	3.05x4.5x1.95	○ Cool White	5000	115	70	2.65~3.55
ELSH-F91C1-0CPHS-C5000	3.05x4.5x1.95	○ Cool White	5000	95	80	2.65~3.55
ELSH-F81N1-0LPGS-C4500	3.05x4.5x1.95	○ Neutral White	4500	85	75	2.65~3.55
ELSH-F91N1-0CPGS-C4500	3.05x4.5x1.95	○ Neutral White	4500	95	75	2.65~3.55
ELSH-J11N1-0VPGS-C4500	3.05x4.5x1.95	○ Neutral White	4500	105	75	2.65~3.55
ELSH-F81N1-0LPGS-C4000	3.05x4.5x1.95	○ Neutral White	4000	85	75	2.95~3.85
ELSH-F91N1-0CPGS-C4000	3.05x4.5x1.95	○ Neutral White	4000	95	75	2.65~3.55
ELSH-J11N1-0VPGS-C4000	3.05x4.5x1.95	○ Neutral White	4000	105	75	2.65~3.55
ELSH-F81N1-0VPHS-C4000	3.05x4.5x1.95	○ Neutral White	4000	85	80	2.65~3.55
ELSH-F91N1-0CPHS-C4000	3.05x4.5x1.95	○ Neutral White	4000	95	80	2.65~3.55
ELSH-F71M1-0LPGS-C3500	3.05x4.5x1.95	○ Warm White	3500	75	75	2.95~3.85
ELSH-F81M1-0CPGS-C3500	3.05x4.5x1.95	○ Warm White	3500	85	75	2.65~3.55
ELSH-F91M1-0VPGS-C3500	3.05x4.5x1.95	○ Warm White	3500	95	75	2.65~3.55
ELSH-F71M1-0CPHS-C3500	3.05x4.5x1.95	○ Warm White	3500	75	80	2.65~3.55
ELSH-F71M1-0LPGS-C3000	3.05x4.5x1.95	○ Warm White	3000	75	75	2.95~3.85
ELSH-F91M1-1LPGS-C3000	3.05x4.5x1.95	○ Warm White	3000	95	75	2.95~3.85
ELSH-F71M1-1LPHS-C3000	3.05x4.5x1.95	○ Warm White	3000	75	80	2.95~3.85
ELSH-F81M1-1LPHS-C3000	3.05x4.5x1.95	○ Warm White	3000	85	80	2.95~3.85
ELSH-F81M1-0CPGS-C3000	3.05x4.5x1.95	○ Warm White	3000	85	75	2.65~3.55
ELSH-F91M1-0VPGS-C3000	3.05x4.5x1.95	○ Warm White	3000	95	75	2.65~3.55
ELSH-F71M1-0CPHS-C3000	3.05x4.5x1.95	○ Warm White	3000	75	80	2.65~3.55
ELSH-F81M1-0VPHS-C3000	3.05x4.5x1.95	○ Warm White	3000	85	80	2.65~3.55
ELSH-F61M1-0LPGS-C2700	3.05x4.5x1.95	○ Warm White	2700	65	75	2.95~3.85
ELSH-F71M1-0CPGS-C2700	3.05x4.5x1.95	○ Warm White	2700	75	75	2.65~3.55
ELSH-F81M1-0CPGS-C2700	3.05x4.5x1.95	○ Warm White	2700	85	75	2.65~3.55
ELSH-F91M1-0VPGS-C2700	3.05x4.5x1.95	○ Warm White	2700	95	75	2.65~3.55
ELSH-F61M1-0CPHS-C2700	3.05x4.5x1.95	○ Warm White	2700	65	80	2.65~3.55
ELSH-F71M1-0CPHS-C2700	3.05x4.5x1.95	○ Warm White	2700	75	80	2.65~3.55
ELSH-F81M1-0VPHS-C2700	3.05x4.5x1.95	○ Warm White	2700	85	80	2.65~3.55

High Power LED ■ Shuen炫 (1W, 3W)

1W / 350mA

Product	Size (LXWXHmm)	Color	Wavelength (nm)	Typ. Luminous Flux (lm)	CRI (min.)	Forward Voltage (V)
ELSH-F41R1-0LPNM-AR5R6	3.05x4.5x1.95	● Red	620~630	48	--	1.75~2.95
*ELSH-F51R1-0LPNM-AR5R6	3.05x4.5x1.95	● Red	620~630	56	--	1.75~2.95
*ELSH-F61R1-0PPNM-AR5R6	3.05x4.5x1.95	● Red	620~630	65	--	1.75~2.95
ELSH-F41O1-0LPNM-AR3R4	3.05x4.5x1.95	● Orange	610~620	48	--	1.75~2.95
ELSH-F51O1-0LPNM-AR3R4	3.05x4.5x1.95	● Orange	610~620	56	--	1.75~2.95
ELSH-F61O1-0PPNM-AR3R4	3.05x4.5x1.95	● Orange	610~620	65	--	1.75~2.95
ELSH-F31Y1-0LPNM-AA3A5	3.05x4.5x1.95	● Amber	585~592.5	42	--	1.75~2.95
ELSH-F41Y1-0LPNM-AA3A5	3.05x4.5x1.95	● Amber	585~592.5	48	--	1.75~2.95
ELSH-F31Y1-0LPNM-AA4A6	3.05x4.5x1.95	● Amber	587.5~595	42	--	1.75~2.95
ELSH-F41Y1-0LPNM-AA4A6	3.05x4.5x1.95	● Amber	587.5~595	48	--	1.75~2.95
ELSH-F71G1-0LPNM-CG1G2	3.05x4.5x1.95	● Green	520~530	75	--	2.95~3.85
ELSH-F71G1-0LPNM-CG2G3	3.05x4.5x1.95	● Green	525~535	75	--	2.95~3.85
ELSH-F81G1-0GPNM-CG1G2	3.05x4.5x1.95	● Green	520~530	85	--	2.95~3.85
ELSH-F81G1-0GPNM-CG2G3	3.05x4.5x1.95	● Green	525~535	85	--	2.95~3.85
*ELSH-E71B1-0LPNM-CB7B8	3.05x4.5x1.95	● Blue	460~470	18	--	2.95~3.85
*ELSH-E81B1-0LPNM-CB7B8	3.05x4.5x1.95	● Blue	460~470	21	--	2.95~3.85
ELSH-Q91L1-0LPNM-CB4B6	3.05x4.5x1.95	● Royal Blue	Wp 445-460	312mW	--	2.95~3.85
*ELSH-Q91E1-0LPNM-JD3D8	3.05x4.5x1.95	● Deep Red	Wp 645-675	312mW	--	2.05~2.95
*ELSH-Q61F1-0LPNM-JF3F8	3.05x4.5x1.95	● Far Red	Wp 715~745	150mW	--	2.05~2.95

Star mark * : *Product lead time of at least 8 weeks.

3W / 700mA

Product	Size (LXWXHmm)	Color	Wavelength (nm)	Typ. Luminous Flux (lm)	CRI (min.)	Forward Voltage (V)
ELSH-F81R3-0LPNM-BR4R6	3.05x4.5x1.95	● Red	615-630	85	--	2.05~3.25
ELSH-F91R3-0LPNM-BR4R6	3.05x4.5x1.95	● Red	615-630	95	--	2.05~3.25
ELSH-F81Y3-0LPNM-BA3A5	3.05x4.5x1.95	● Amber	585-592.5	85	--	2.05~3.25
ELSH-F91Y3-0LPNM-BA3A5	3.05x4.5x1.95	● Amber	585-592.5	95	--	2.05~3.25
*ELSH-F91G3-0LPNM-DG1G3	3.05x4.5x1.95	● Green	520-535	95	--	3.25-4.15
*ELSH-J11G3-0LPNM-DG1G3	3.05x4.5x1.95	● Green	520-535	105	--	3.25-4.15
*ELSH-E81B3-0LPNM-DB6B8	3.05x4.5x1.95	● Blue	455-470	21	--	3.25-4.15
*ELSH-E91B3-0LPNM-DB6B8	3.05x4.5x1.95	● Blue	455-470	25	--	3.25-4.15

Star mark * : *Product lead time of at least 8 weeks.

High Power LED ■ Shuen炫 (1W, 3W)


3W / 700mA

Product	Size (LXWXHmm)	Color	CCT (K)	Typ. Luminous Flux (lm)	CRI (min.)	Forward Voltage (V)
ELSH-J61C3-0LPGS-D6500	3.05x4.5x1.95	○ Cool White	6500	155	70	3.25~4.15
ELSH-J71C3-0CPGS-D6500	3.05x4.5x1.95	○ Cool White	6500	165	70	2.95~3.85
ELSH-J81C3-0CPGS-D6500	3.05x4.5x1.95	○ Cool White	6500	185	70	2.95~3.85
ELSH-J71C3-0CPHS-D6500	3.05x4.5x1.95	○ Cool White	6500	165	80	2.95~3.85
ELSH-J61C3-0LPGS-D5700	3.05x4.5x1.95	○ Cool White	5700	155	70	3.25~4.15
ELSH-J71C3-0CPGS-D5700	3.05x4.5x1.95	○ Cool White	5700	165	70	2.95~3.85
ELSH-J81C3-0CPGS-D5700	3.05x4.5x1.95	○ Cool White	5700	185	70	2.95~3.85
ELSH-J71C3-0CPHS-D5700	3.05x4.5x1.95	○ Cool White	5700	165	80	2.95~3.85
ELSH-J51C3-0LPGS-D5000	3.05x4.5x1.95	○ Cool White	5000	145	70	3.25~4.15
ELSH-J61C3-0CPGS-D5000	3.05x4.5x1.95	○ Cool White	5000	155	70	2.95~3.85
ELSH-J71C3-0CPGS-D5000	3.05x4.5x1.95	○ Cool White	5000	165	70	2.95~3.85
ELSH-J61C3-0CPHS-D5000	3.05x4.5x1.95	○ Cool White	5000	155	80	2.95~3.85
ELSH-J41N3-0LPGS-D4500	3.05x4.5x1.95	○ Neutral White	4500	135	75	3.25~4.15
ELSH-J51N3-0CPGS-D4500	3.05x4.5x1.95	○ Neutral White	4500	145	75	2.95~3.85
ELSH-J61N3-0CPGS-D4500	3.05x4.5x1.95	○ Neutral White	4500	155	75	2.95~3.85
ELSH-J51N3-0CPHS-D4500	3.05x4.5x1.95	○ Neutral White	4500	145	80	2.95~3.85
ELSH-J31N3-0LPGS-D4000	3.05x4.5x1.95	○ Neutral White	4000	125	75	3.25~4.15
ELSH-J41N3-0CPGS-D4000	3.05x4.5x1.95	○ Neutral White	4000	135	75	2.95~3.85
ELSH-J61N3-0CPGS-D4000	3.05x4.5x1.95	○ Neutral White	4000	155	75	2.95~3.85
ELSH-J51N3-0CPHS-D4000	3.05x4.5x1.95	○ Neutral White	4000	145	80	2.95~3.85
ELSH-J21M3-0LPGS-D3500	3.05x4.5x1.95	● Warm White	3500	115	75	3.25~4.15
ELSH-J31M3-0CPGS-D3500	3.05x4.5x1.95	● Warm White	3500	125	75	2.95~3.85
ELSH-J51M3-0CPGS-D3500	3.05x4.5x1.95	● Warm White	3500	145	75	2.95~3.85
ELSH-J41M3-0CPHS-D3500	3.05x4.5x1.95	● Warm White	3500	135	80	2.95~3.85
ELSH-J21M3-0LPGS-D3000	3.05x4.5x1.95	● Warm White	3000	115	75	3.25~4.15
ELSH-J31M3-0CPGS-D3000	3.05x4.5x1.95	● Warm White	3000	125	75	2.95~3.85
ELSH-J51M3-0CPGS-D3000	3.05x4.5x1.95	● Warm White	3000	145	75	2.95~3.85
ELSH-J21M3-0CPHS-D3000	3.05x4.5x1.95	● Warm White	3000	115	80	2.95~3.85
ELSH-J41M3-0CPHS-D3000	3.05x4.5x1.95	● Warm White	3000	135	80	2.95~3.85
ELSH-J21M3-0LPGS-D2700	3.05x4.5x1.95	● Warm White	2700	115	75	3.25~4.15
ELSH-J31M3-0CPGS-D2700	3.05x4.5x1.95	● Warm White	2700	125	75	2.95~3.85
ELSH-J51M3-0CPGS-D2700	3.05x4.5x1.95	● Warm White	2700	145	75	2.95~3.85
ELSH-J21M3-0CPHS-D2700	3.05x4.5x1.95	● Warm White	2700	115	80	2.95~3.85
ELSH-J41M3-0CPHS-D2700	3.05x4.5x1.95	● Warm White	2700	135	80	2.95~3.85

High Power LED ■ Shwo燦 (1W, 3W)



UNIT : mm

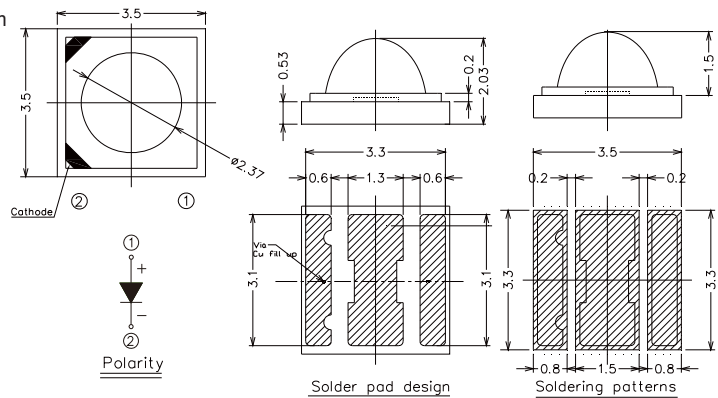

1W / 350mA

Product	Size (LXWXHmm)	Color	CCT (K)	Typ. Luminous Flux (lm)	CRI (min.)	Forward Voltage (V)
ELSW-F91C1-0LPGS-C6500	3.5x3.5x2.03	○ Cool White	6500	95	70	2.95~3.85
ELSW-J11C1-0CPGS-C6500	3.5x3.5x2.03	○ Cool White	6500	105	70	2.65~3.55
ELSW-J21C1-0VPGS-C6500	3.5x3.5x2.03	○ Cool White	6500	115	70	2.65~3.55
ELSW-J11C1-0VPHS-C6500	3.5x3.5x2.03	○ Cool White	6500	105	80	2.65~3.55
ELSW-F91C1-0LPGS-C5700	3.5x3.5x2.03	○ Cool White	5700	95	70	2.95~3.85
ELSW-J11C1-1LPGS-C5700	3.5x3.5x2.03	○ Cool White	5700	105	70	2.95~3.85
ELSW-J21C1-1LPGS-C5700	3.5x3.5x2.03	○ Cool White	5700	115	70	2.95~3.85
ELSW-J11C1-0CPGS-C5700	3.5x3.5x2.03	○ Cool White	5700	105	70	2.65~3.55
ELSW-J21C1-0VPGS-C5700	3.5x3.5x2.03	○ Cool White	5700	115	70	2.65~3.55
ELSW-J11C1-0VPHS-C5700	3.5x3.5x2.03	○ Cool White	5700	105	80	2.65~3.55
ELSW-F81C1-0LPGS-C5000	3.5x3.5x2.03	○ Cool White	5000	85	70	2.95~3.85
ELSW-F91C1-0CPGS-C5000	3.5x3.5x2.03	○ Cool White	5000	95	70	2.65~3.55
ELSW-J11C1-0VPGS-C5000	3.5x3.5x2.03	○ Cool White	5000	105	70	2.65~3.55
ELSW-J21C1-0CPGS-C5000	3.5x3.5x2.03	○ Cool White	5000	115	70	2.65~3.55
ELSW-F91C1-0CPHS-C5000	3.5x3.5x2.03	○ Cool White	5000	95	80	2.65~3.55
ELSW-F81N1-0LPGS-C4500	3.5x3.5x2.03	○ Neutral White	4500	85	75	2.65~3.55
ELSW-F91N1-0CPGS-C4500	3.5x3.5x2.03	○ Neutral White	4500	95	75	2.65~3.55
ELSW-J11N1-0VPGS-C4500	3.5x3.5x2.03	○ Neutral White	4500	105	75	2.65~3.55
ELSW-F81N1-0LPGS-C4000	3.5x3.5x2.03	○ Neutral White	4000	85	75	2.95~3.85
ELSW-F91N1-0CPGS-C4000	3.5x3.5x2.03	○ Neutral White	4000	95	75	2.65~3.55
ELSW-J11N1-0VPGS-C4000	3.5x3.5x2.03	○ Neutral White	4000	105	75	2.65~3.55
ELSW-F81N1-0VPHS-C4000	3.5x3.5x2.03	○ Neutral White	4000	85	80	2.65~3.55
ELSW-F91N1-0CPHS-C4000	3.5x3.5x2.03	○ Neutral White	4000	95	80	2.65~3.55
ELSW-F71M1-0LPGS-C3500	3.5x3.5x2.03	● Warm White	3500	75	75	2.95~3.85
ELSW-F81M1-0CPGS-C3500	3.5x3.5x2.03	● Warm White	3500	85	75	2.65~3.55
ELSW-F91M1-0VPGS-C3500	3.5x3.5x2.03	● Warm White	3500	95	75	2.65~3.55
ELSW-F71M1-0CPHS-C3500	3.5x3.5x2.03	● Warm White	3500	75	80	2.65~3.55
ELSW-F71M1-0LPGS-C3000	3.5x3.5x2.03	● Warm White	3000	75	75	2.95~3.85
ELSW-F91M1-1LPGS-C3000	3.5x3.5x2.03	● Warm White	3000	95	75	2.95~3.85
ELSW-F71M1-1LPHS-C3000	3.5x3.5x2.03	● Warm White	3000	75	80	2.95~3.85
ELSW-F81M1-1LPHS-C3000	3.5x3.5x2.03	● Warm White	3000	85	80	2.95~3.85
ELSW-F81M1-0CPGS-C3000	3.5x3.5x2.03	● Warm White	3000	85	75	2.65~3.55
ELSW-F91M1-0VPGS-C3000	3.5x3.5x2.03	● Warm White	3000	95	75	2.65~3.55
ELSW-F71M1-0CPHS-C3000	3.5x3.5x2.03	● Warm White	3000	75	80	2.65~3.55
ELSW-F81M1-0VPHS-C3000	3.5x3.5x2.03	● Warm White	3000	85	80	2.65~3.55
ELSW-F61M1-0LPGS-C2700	3.5x3.5x2.03	● Warm White	2700	65	75	2.95~3.85
ELSW-F71M1-0CPGS-C2700	3.5x3.5x2.03	● Warm White	2700	75	75	2.65~3.55
ELSW-F81M1-0CPGS-C2700	3.5x3.5x2.03	● Warm White	2700	85	75	2.65~3.55
ELSW-F91M1-0VPGS-C2700	3.5x3.5x2.03	● Warm White	2700	95	75	2.65~3.55
ELSW-F61M1-0CPHS-C2700	3.5x3.5x2.03	● Warm White	2700	65	80	2.65~3.55
ELSW-F71M1-0CPHS-C2700	3.5x3.5x2.03	● Warm White	2700	75	80	2.65~3.55
ELSW-F81M1-0VPHS-C2700	3.5x3.5x2.03	● Warm White	2700	85	80	2.65~3.55

High Power LED ■ Shwo_樂 (1W, 3W)

1W / 350mA

Product	Size (LXWXHmm)	Color	Wavelength (nm)	Typ. Luminous Flux (lm)	CRI (min.)	Forward Voltage (V)
*ELSW-F51R1-0LPNM-AR5R6	3.5x3.5x2.03	● Red	620-630	56	--	1.75-2.65
*ELSW-F61R1-0PPNM-AR5R6	3.5x3.5x2.03	● Red	620-630	65	--	1.75-2.65
*ELSW-F51O1-0LPNM-AR3R4	3.5x3.5x2.03	● Orange	610-620	56	--	1.75-2.65
ELSW-F61O1-0PPNM-AR3R4	3.5x3.5x2.03	● Orange	610-620	65	--	1.75-2.65
ELSW-F41Y1-0LPNM-AA3A5	3.5x3.5x2.03	● Amber	585-592.5	48	--	1.75-2.65
ELSW-F71G1-0LPNM-CG1G2	3.5x3.5x2.03	● Amber	520-530	75	--	2.95~3.85
ELSW-F71G1-0LPNM-CG2G3	3.5x3.5x2.03	● Green	525-535	75	--	2.95~3.85
*ELSW-F81G1-0GPNM-CG1G2	3.5x3.5x2.03	● Green	520-530	85	--	2.95~3.85
*ELSW-E71B1-0LPNM-CB7B8	3.5x3.5x2.03	● Blue	460-470	18	--	2.95~3.85
*ELSW-E81B1-0LPNM-CB7B8	3.5x3.5x2.03	● Blue	460-470	21	--	2.95~3.85

Star mark * : *Product lead time of at least 8 weeks.

3W / 700mA

Product	Size (LXWXHmm)	Color	Wavelength (nm)	Typ. Luminous Flux (lm)	CRI (min.)	Forward Voltage (V)
ELSW-F81R3-0LPNM-BR4R6	3.5x3.5x2.03	● Red	615-630	85	80	2.05~3.25
ELSW-F91R3-0LPNM-BR4R6	3.5x3.5x2.03	● Red	615-630	95	90	2.05~3.25
ELSW-F81Y3-0LPNM-BA3A5	3.5x3.5x2.03	● Amber	585-592.5	85	80	2.05~3.25
ELSW-F91Y3-0LPNM-BA3A5	3.5x3.5x2.03	● Amber	585-592.5	95	90	2.05~3.25
*ELSW-F91G3-0LPNM-DG1G3	3.5x3.5x2.03	● Green	520-535	95	90	3.25~4.15
*ELSW-J11G3-0LPNM-DG1G3	3.5x3.5x2.03	● Green	520-535	105	100	3.25~4.15
*ELSW-E81B3-0LPNM-DB6B8	3.5x3.5x2.03	● Blue	455-470	21	20	3.25~4.15
*ELSW-E91B3-0LPNM-DB6B8	3.5x3.5x2.03	● Blue	455-470	25	23	3.25~4.15

Star mark * : *Product lead time of at least 8 weeks.

High Power LED ■ Shwo燦 (1W, 3W)


3W / 700mA

Product	Size (LXWXHmm)	Color	Wavelength (nm) / CCT (K)	Typ. Luminous Flux (lm)	CRI (min.)	Forward Voltage (V)
ELSW-J61C3-0LPGS-D6500	3.5x3.5x2.03	○ Cool White	6500	155	70	3.25~4.15
ELSW-J71C3-0CPGS-D6500	3.5x3.5x2.03	○ Cool White	6500	165	70	2.95~3.85
ELSW-J81C3-0CPGS-D6500	3.5x3.5x2.03	○ Cool White	6500	185	70	2.95~3.85
ELSW-J71C3-0CPHS-D6500	3.5x3.5x2.03	○ Cool White	6500	165	80	2.95~3.85
ELSW-J61C3-0LPGS-D5700	3.5x3.5x2.03	○ Cool White	5700	155	70	3.25~4.15
ELSW-J71C3-0CPGS-D5700	3.5x3.5x2.03	○ Cool White	5700	165	70	2.95~3.85
ELSW-J81C3-0CPGS-D5700	3.5x3.5x2.03	○ Cool White	5700	185	70	2.95~3.85
ELSW-J71C3-0CPHS-D5700	3.5x3.5x2.03	○ Cool White	5700	165	80	2.95~3.85
ELSW-J51C3-0LPGS-D5000	3.5x3.5x2.03	○ Cool White	5000	145	70	3.25~4.15
ELSW-J61C3-0CPGS-D5000	3.5x3.5x2.03	○ Cool White	5000	155	70	2.95~3.85
ELSW-J71C3-0CPGS-D5000	3.5x3.5x2.03	○ Cool White	5000	165	70	2.95~3.85
ELSW-J61C3-0CPHS-D5000	3.5x3.5x2.03	○ Cool White	5000	155	80	2.95~3.85
ELSW-J41N3-0LPGS-D4500	3.5x3.5x2.03	○ Neutral White	4500	135	75	3.25~4.15
ELSW-J51N3-0CPGS-D4500	3.5x3.5x2.03	○ Neutral White	4500	145	75	2.95~3.85
ELSW-J61N3-0CPGS-D4500	3.5x3.5x2.03	○ Neutral White	4500	155	75	2.95~3.85
ELSW-J51N3-0CPHS-D4500	3.5x3.5x2.03	○ Neutral White	4500	145	80	2.95~3.85
ELSW-J31N3-0LPGS-D4000	3.5x3.5x2.03	○ Neutral White	4000	125	75	3.25~4.15
ELSW-J41N3-0CPGS-D4000	3.5x3.5x2.03	○ Neutral White	4000	135	75	2.95~3.85
ELSW-J61N3-0CPGS-D4000	3.5x3.5x2.03	○ Neutral White	4000	155	75	2.95~3.85
ELSW-J51N3-0CPHS-D4000	3.5x3.5x2.03	○ Neutral White	4000	145	80	2.95~3.85
ELSW-J21M3-0LPGS-D3500	3.5x3.5x2.03	● Warm White	3500	115	75	3.25~4.15
ELSW-J31M3-0CPGS-D3500	3.5x3.5x2.03	● Warm White	3500	125	75	2.95~3.85
ELSW-J51M3-0CPGS-D3500	3.5x3.5x2.03	● Warm White	3500	145	75	2.95~3.85
ELSW-J41M3-0CPHS-D3500	3.5x3.5x2.03	● Warm White	3500	135	80	2.95~3.85
ELSW-J21M3-0LPGS-D3000	3.5x3.5x2.03	● Warm White	3000	115	75	3.25~4.15
ELSW-J31M3-0CPGS-D3000	3.5x3.5x2.03	● Warm White	3000	125	75	2.95~3.85
ELSW-J51M3-0CPGS-D3000	3.5x3.5x2.03	● Warm White	3000	145	75	2.95~3.85
ELSW-J21M3-0CPHS-D3000	3.5x3.5x2.03	● Warm White	3000	115	80	2.95~3.85
ELSW-J41M3-0CPHS-D3000	3.5x3.5x2.03	● Warm White	3000	135	80	2.95~3.85
ELSW-J21M3-0LPGS-D2700	3.5x3.5x2.03	● Warm White	2700	115	75	3.25~4.15
ELSW-J31M3-0CPGS-D2700	3.5x3.5x2.03	● Warm White	2700	125	75	2.95~3.85
ELSW-J51M3-0CPGS-D2700	3.5x3.5x2.03	● Warm White	2700	145	75	2.95~3.85
ELSW-J21M3-0CPHS-D2700	3.5x3.5x2.03	● Warm White	2700	115	80	2.95~3.85
ELSW-J41M3-0CPHS-D2700	3.5x3.5x2.03	● Warm White	2700	135	80	2.95~3.85

High Power LED ■ Shwo (D) 燦 (D) (1W)



UNIT : mm

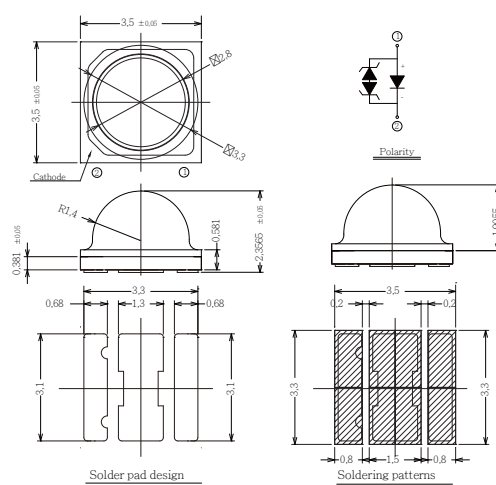


1W / 350mA

Product	Size (LXWXHmm)	Color	CCT (K)	Typ. Luminous Flux (lm)	CRI (min.)	Forward Voltage (V)
ELSWD-J21C1-0LPGE-C5700	3.5x3.5x2.35	○ Cool White	5700	118	70	2.95~3.85
ELSWD-F81M1-0LPHE-C3000	3.5x3.5x2.35	● Warm White	3000	88	80	2.95~3.85

High Power LED ■ A09K (0.5W)



UNIT : mm

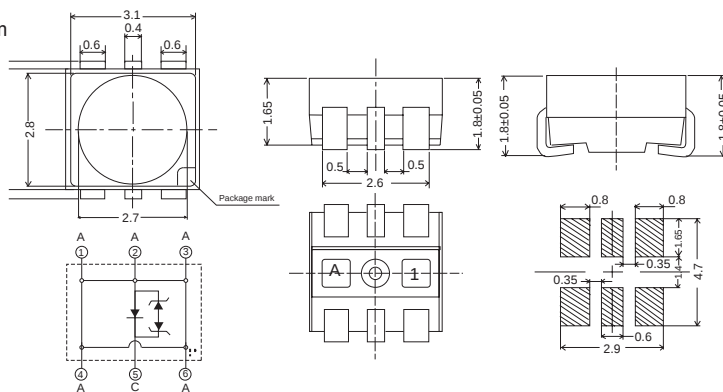


Product	Size (LXWXHmm)	Color	Iv (mcd)	Wavelength (nm) / CCT (K)	V _F (V)	Viewing Angle (°)
EHP-A09K-S5TC-S3000CADA1K-1T8-AM	3.4x3.3x1.75	● Red	2800~5600	616~625 nm	1.7~3.2	120
EHP-A09K-Y8TC-E9000BBD1K-1T8-AM	3.4x3.3x1.75	● Yellow	2240~5600	586~595 nm	1.7~3.2	120
EHP-A09K-BRTT-5670HDBEBD9K-1T8-AM	3.4x3.3x1.75	○ Cool White	5600~11200	5650~7000 K	2.75~4.25	120

High Power LED ■ A22 (0.5W, 1W)

PRELIMINARY

UNIT : mm

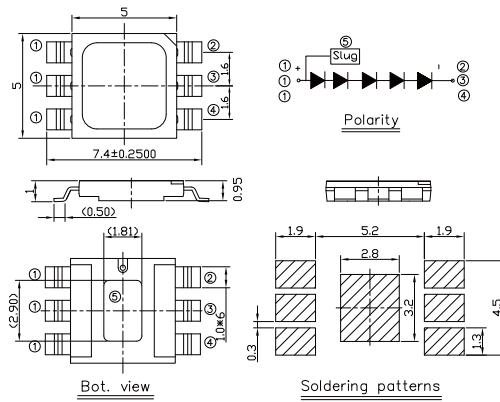

0.5W / 150mA

Product	Size (LXWXHmm)	Color	CCT (K)	Typ. Luminous Flux (lm)	CRI (min.)	Forward Voltage (V)
EHP-A22/GT31H-PU5/57K/J4/TR	5.0x7.4x0.95	○ Cool White	5700	44	65	3.25-3.85
EHP-A22/GT31H-PU5/50K/J4/TR	5.0x7.4x0.95	○ Cool White	5000	44	65	3.25-3.85
EHP-A22/KM31H-PU5/45K/J3/TR	5.0x7.4x0.95	○ Neutral White	4500	39	80	3.25-3.85
EHP-A22/KM31H-PU5/40K/J3/TR	5.0x7.4x0.95	○ Neutral White	4000	39	80	3.25-3.85
EHP-A22/KM31H-PU5/35K/J3/TR	5.0x7.4x0.95	● Warm White	3500	39	80	3.25-3.85
EHP-A22/KM31H-PU5/30K/J3/TR	5.0x7.4x0.95	● Warm White	3000	39	80	3.25-3.85
EHP-A22/KM31H-PU5/27K/J2/TR	5.0x7.4x0.95	● Warm White	2700	33	80	3.25-3.85

• Product Availability : Please visit EVERLIGHT website for more updated information (www.everlight.com) or contact EVERLIGHT sales for regional options.

1W / 80mA

Product	Size (LXWXHmm)	Color	CCT (K)	Typ. Luminous Flux (lm)	CRI (min.)	Forward Voltage (V)
EHP-A22/GT35H-P01/57K/N11/TR	5.0x7.4x0.95	○ Cool White	5700	133	65	13.5-16.5
EHP-A22/KM35H-P01/30K/K51/TR	5.0x7.4x0.95	● Warm White	3000	105	80	13.5-16.5


• Product Availability : Please visit EVERLIGHT website for more updated information (www.everlight.com) or contact EVERLIGHT sales for regional options.

High Power LED ■ A30 (3W, 5W)



PRELIMINARY

UNIT : mm

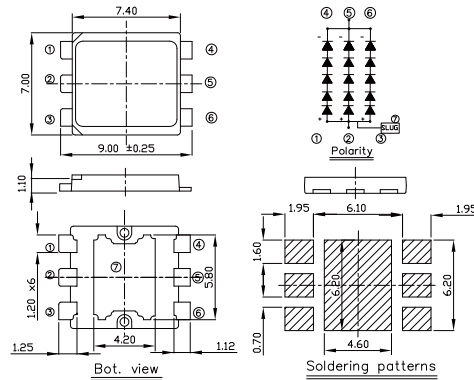

3W / 210mA

Product	Size (LXWXHmm)	Color	CCT (K)	Typ. Luminous Flux (lm)	CRI (min.)	Forward Voltage (V)
EHP-A30/GT53H-P03/50K/N52/TR	7.4x9.0x1.1	○ Cool White	5000	363	65	13.5-16.5
EHP-A30/KM53H-P03/30K/N42/TR	7.4x9.0x1.1	● Warm White	3000	290	80	13.5-16.5

• Product Availability : Please visit EVERLIGHT website for more updated information (www.everlight.com) or contact EVERLIGHT sales for regional options.

5W / 330mA


Product	Size (LXWXHmm)	Color	CCT (K)	Typ. Luminous Flux (lm)	CRI (min.)	Forward Voltage (V)
EHP-A30/GT53H-P05/50K/R2/TR	7.4x9.0x1.1	○ Cool White	5000	532	65	14.7-17.4
EHP-A30/KM53H-P03/30K/R1/TR	7.4x9.0x1.1	● Warm White	3000	424	80	14.7-17.4

• Product Availability : Please visit EVERLIGHT website for more updated information (www.everlight.com) or contact EVERLIGHT sales for regional options.

High Power LED ■ B05 (5W)



UNIT : mm

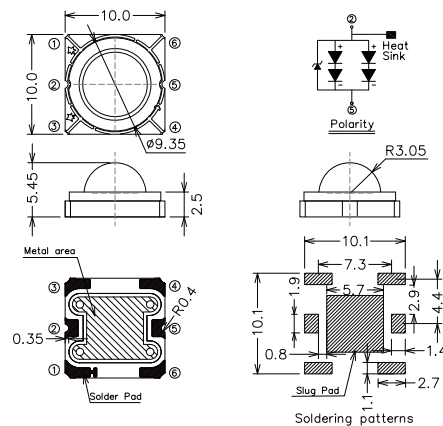


5W / 700mA

Product	Size (LXWXHmm)	Color	CCT (K)	Typ. Luminous Flux (lm)	CRI (min.)	Forward Voltage (V)
EHP-B05MLG/GT04H-P05/65K/R11/TR	10.0x10.0x5.45	○ Cool White	6500	430	70	6.0~7.0
EHP-B05MLG/GT04H-P05/57K/R11/TR	10.0x10.0x5.45	○ Cool White	5700	430	70	6.0~7.0
EHP-B05MLG/GT04H-P05/50K/R11/TR	10.0x10.0x5.45	○ Cool White	5000	430	70	6.0~7.0
EHP-B05MLG/KM04H-P05/45K/N52/TR	10.0x10.0x5.45	○ Neutral White	4500	375	80	6.0~7.0
EHP-B05MLG/KM04H-P05/40K/N51/TR	10.0x10.0x5.45	○ Neutral White	4000	325	80	6.0~7.0
EHP-B05MLG/KM04H-P05/35K/N51/TR	10.0x10.0x5.45	● Warm White	3500	325	80	6.0~7.0
EHP-B05MLG/KM04H-P05/30K/N42/TR	10.0x10.0x5.45	● Warm White	3000	300	80	6.0~7.0
EHP-B05MLG/KM04H-P05/27K/N42/TR	10.0x10.0x5.45	● Warm White	2700	300	80	6.0~7.0

Low Middle Power LED ■ 45-21 Series (3020 package, 0.06W)



UNIT : mm

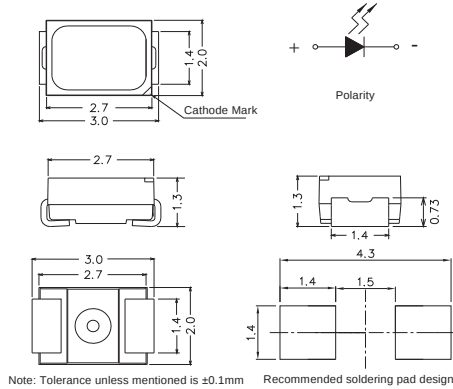


Product	Size (LXWXHmm)	Color	CCT (K)	Typ. Luminous Flux (lm) @ 20mA	CRI (min.)	Forward Voltage (V)
45-21/LK2C-B56702C4CB2/2T	3.0x2.0x1.3	○ Cool White	5650~7000	6.8	70	2.9~3.6
45-21/LK2C-B50634C6CB2/2T	3.0x2.0x1.3	○ Cool White	5000~6300	7.4	70	2.9~3.6
45-21/LK2C-B45562C4CB2/2T	3.0x2.0x1.3	○ Neutral White	4500~5650	6.8	70	2.9~3.6
45-21/LK2C-B38452C4CB2/2T	3.0x2.0x1.3	○ Neutral White	3800~4500	6.8	70	2.9~3.6
45-21/LK2C-B2832AC2CB2/2T	3.0x2.0x1.3	● Warm White	2850~3250	6.2	70	2.9~3.6
45-21/QK2C-B56702C4CB41/2T	3.0x2.0x1.3	○ Cool White	5650~7000	6.8	75	2.9~3.4
45-21/QK2C-B50632C4CB2/2T	3.0x2.0x1.3	○ Cool White	5000~6300	6.8	75	2.9~3.6
45-21/QK2C-B45562C4CB2/2T	3.0x2.0x1.3	○ Neutral White	4500~5650	6.8	75	2.9~3.6
45-21/QK2C-B3845AC2CB2/2T	3.0x2.0x1.3	○ Neutral White	3800~4500	6.2	75	2.9~3.6
45-21/QK2C-B28322C4CB2/2T	3.0x2.0x1.3	● Warm White	2850~3250	6.2	75	2.9~3.6
45-21/KK2C-S30308BACB41/2T	3.0x2.0x1.3	● Warm White	ANSI 3000	5.6	80	2.9~3.4
45-21/KK2C-S4040AC4CB41/2T	3.0x2.0x1.3	● Warm White	ANSI 4000	6.2	80	2.9~3.4

Low Middle Power LED ■ 67-21 Series (3528 package, 0.06W)



UNIT : mm

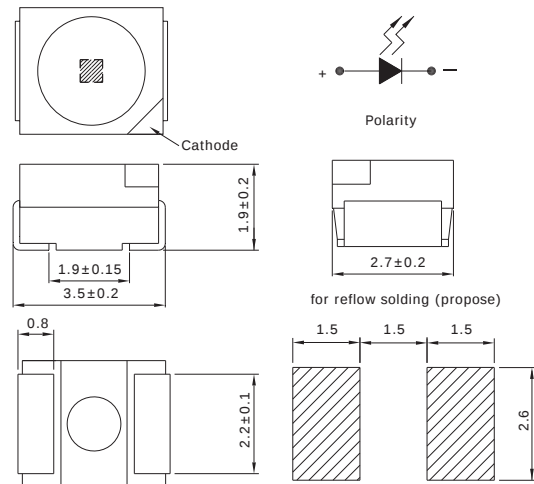


Note: Tolerance unless mentioned is ±0.1mm

Product	Size (LXWXHmm)	Color	CCT (K)	Typ. Luminous Flux (lm) @ 20mA	CRI (min.)	Forward Voltage (V)
67-21/LK2C-B56704C6CB2/2T	3.5x2.8x1.9	○ Cool White	5650~7000	7.4	70	2.9~3.6
67-21/LK2C-B50636C8CB2/2T	3.5x2.8x1.9	○ Cool White	5000~6300	7.8	70	2.9~3.6
67-21/LK2C-B50634C6CB2/2T	3.5x2.8x1.9	○ Cool White	5000~6300	7.4	70	2.9~3.6
67-21/LK2C-B45564C6CB2/2T	3.5x2.8x1.9	○ Neutral White	4500~5650	7.4	70	2.9~3.6
67-21/LK2C-B38454C6CB2/2T	3.5x2.8x1.9	○ Neutral White	3800~4500	7.4	70	2.9~3.6
67-21/LK2C-B28322C4CB2/2T	3.5x2.8x1.9	● Warm White	2850~3250	6.8	70	2.9~3.6
67-21/LK2C-B28324C6CB2/2T	3.5x2.8x1.9	● Warm White	2850~3250	7.4	70	2.9~3.6
67-21/QK2C-B56702C4CB2/2T	3.5x2.8x1.9	○ Cool White	5650~7000	6.8	75	2.9~3.6
67-21/QK2C-B50632C4CB2/2T	3.5x2.8x1.9	○ Cool White	5000~6300	6.8	75	2.9~3.6
67-21/QK2C-B45562C4CB2/2T	3.5x2.8x1.9	○ Neutral White	4500~5650	6.8	75	2.9~3.6
67-21/QK2C-B38452C4CB2/2T	3.5x2.8x1.9	○ Neutral White	3800~4500	6.8	75	2.9~3.6
67-21/QK2C-B28322C4CB2/2T	3.5x2.8x1.9	● Warm White	2850~3250	6.8	75	2.9~3.6
67-21/KK2C-B5063AC4CB2/2T	3.5x2.8x1.9	○ Cool White	5000~6300	6.2	80	2.9~3.6
67-21/KK2C-S3030AC2CB2/2T	3.5x2.8x1.9	● Warm White	ANSI 3000	6.2	80	2.9~3.6
67-21/KK2C-S4040AC2CB2/2T	3.5x2.8x1.9	● Warm White	ANSI 4000	6.2	80	2.9~3.6

Low Middle Power LED ■ 7030 Series (0.6W~0.8W)



UNIT : mm

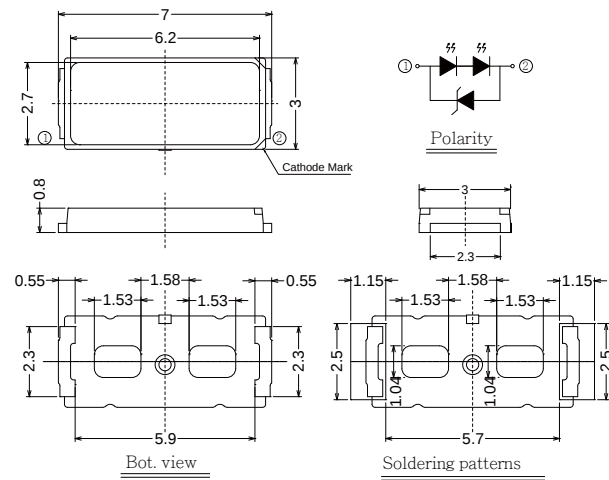

Product	Size (LXWXHmm)	Color	CCT (K)	Typ. Luminous Flux (lm) @ 100mA	CRI (min.)	Forward Voltage (V)
EL7030/QK2C-S5757XXXXXX/2T	7.0x3.0x0.8	○ Cool White	ANSI 5700	82	75	2.9~3.6
EL7030/KK2C-S3030XXXXXX/2T	7.0x3.0x0.8	● Warm White	ANSI 3000	73	80	2.9~3.6


- Product Availability : Please visit EVERLIGHT website for more updated information (www.everlight.com) or contact EVERLIGHT sales for regional options.

Low Middle Power LED ■ 62-227B & 62-217B Series (5630 package, 0.4W / 0.5W)



0.4W / 120mA

UNIT : mm

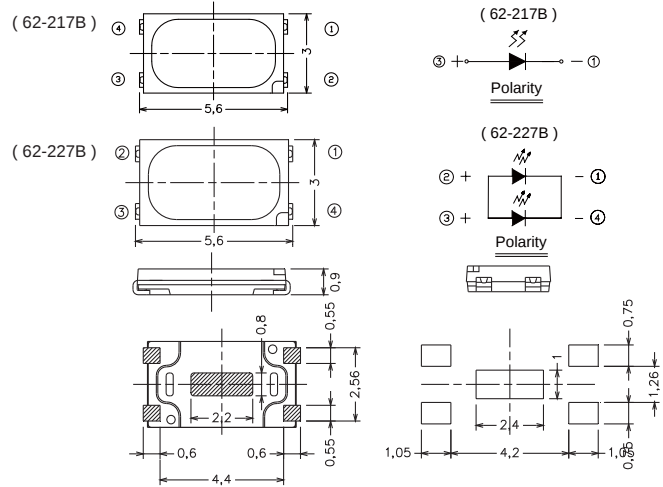


Product	Size (LXWXHmm)	Color	CCT (K)	Typ. Luminous Flux (lm) @ 120mA	CRI (min.)	Forward Voltage (V)
62-227B/QK2C-S6565P4Q3B2Z12/2T	5.6x3.0x0.9	○ Cool White	ANSI 6500	41	75	2.9~3.6
62-227B/QK2C-S5757P4Q3B2Z12/2T	5.6x3.0x0.9	○ Cool White	ANSI 5700	45	75	2.9~3.6
62-227B/QK2C-S5050P4Q3B2Z12/2T	5.6x3.0x0.9	○ Cool White	ANSI 5000	45	75	2.9~3.6
62-227B/QK2C-S4040P3P4B2Z12/2T	5.6x3.0x0.9	○ Neutral White	ANSI 4000	39	75	2.9~3.6
62-227B/QK2C-S3535P3P4B2Z12/2T	5.6x3.0x0.9	○ Neutral White	ANSI 3500	39	75	2.9~3.6
62-227B/KK2C-S3030P3P4B2Z12/2T	5.6x3.0x0.9	● Warm White	ANSI 3000	39	80	2.9~3.6
62-227B/KK2C-S2727N4P3B2Z12/2T	5.6x3.0x0.9	● Warm White	ANSI 2700	33	80	2.9~3.6


0.5W / 150mA

Product	Size (LXWXHmm)	Color	CCT (K)	Typ. Luminous Flux (lm) @ 150mA	CRI (min.)	Forward Voltage (V)
62-217B/QK2C-S6565R1R3B42Z15/2T	5.6x3.0x0.9	○ Cool White	ANSI 6500	55	75	2.8~3.5
62-217B/QK2C-S5757R1R3B42Z15/2T	5.6x3.0x0.9	○ Cool White	ANSI 5700	55	75	2.8~3.5
62-217B/QK2C-S5757QAR1B42Z15/2T	5.6x3.0x0.9	○ Cool White	ANSI 5700	50	75	2.8~3.5
62-217B/KK2C-S4040QAR2B42Z15/2T	5.6x3.0x0.9	○ Neutral White	ANSI 4000	50	80	2.8~3.5
62-217B/QK2C-S4040QAR1B42Z15/2T	5.6x3.0x0.9	○ Neutral White	ANSI 4000	50	75	2.8~3.5
62-217B/KK2C-S3030QAR2B42Z15/2T	5.6x3.0x0.9	● Warm White	ANSI 3000	50	80	2.8~3.5
62-217B/KK2C-S3030PBQAB42Z15/2T	5.6x3.0x0.9	● Warm White	ANSI 3000	45	80	2.8~3.5
62-217B/KK2C-S2727PAQAB42Z15/2T	5.6x3.0x0.9	● Warm White	ANSI 2700	40	80	2.8~3.5

Flash LED ■ High Power Flash LED ■ Module Type

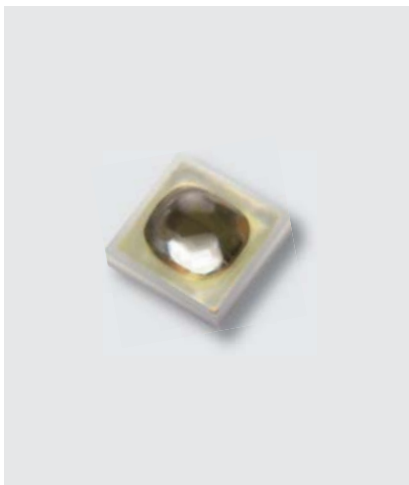

UNIT : mm

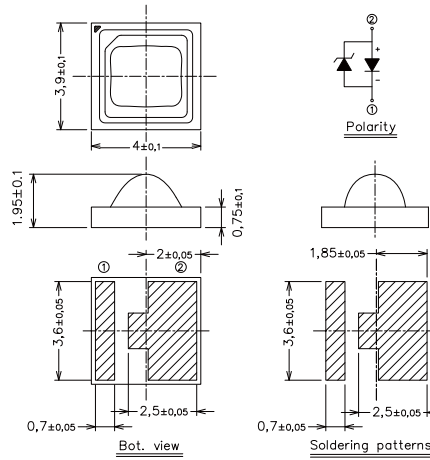


Product	Size (LXWXHmm)	Color	CCT (K)	Typ. Illuminance (lx)	Forward Voltage (V)	I _F (mA)
ELYU03-5070J4J6294310-N0	4.0x3.9x1.95	○ White	5000~7000	220	2.95~4.35	1000

Flash LED ■ High Power Flash LED ■ 2016 Package



UNIT : mm

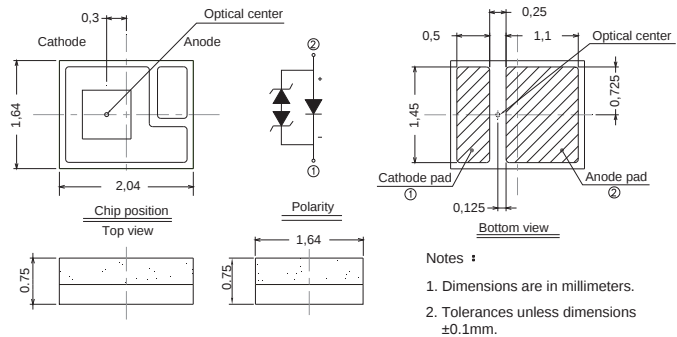


Product	Size (LXWXHmm)	Color	CCT (K)	Typ. Luminous Flux (lm)	Forward Voltage (V)	I _F (mA)
EHP-C04/NT01H-P01/TR	2.04x1.64x0.75	○ White	4500~7000	80	2.95~4.35	500

Flash LED ■ High Power Flash LED ■ 2016 Package




UNIT : mm

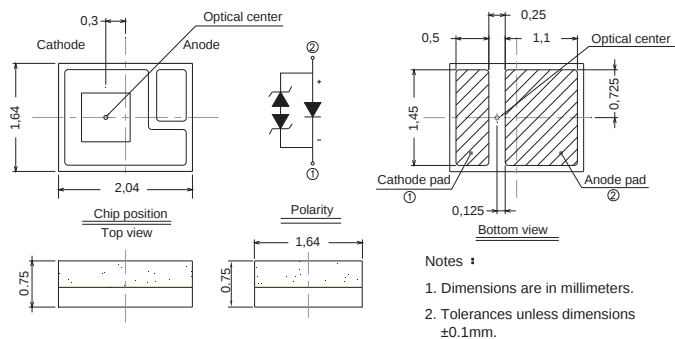

Product	Size (LXWXH)mm	Color	CCT (K)	Typ. Luminous Flux (lm)	Forward Voltage (V)	I _F (mA)
EHP-C04/NT01A-P01/TR	2.04x1.64x0.75	○ White	4500~7000	160	2.95~4.35	1000



UNIT : mm

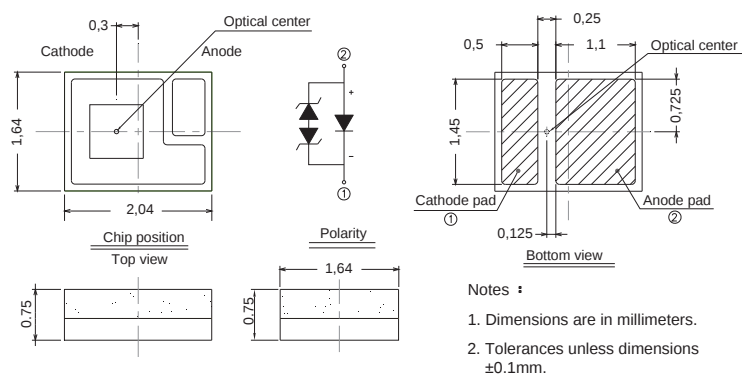


Product	Size (LXWXH)mm	Color	CCT (K)	Typ. Luminous Flux (lm)	Forward Voltage (V)	I _F (mA)
ELCH06/BJ4J6Z10-N0	2.04x1.64x0.75	○ White	4500~7000	200	2.95~4.35	1000

Flash LED ■ High Power Flash LED ■ 2016 Package



UNIT : mm

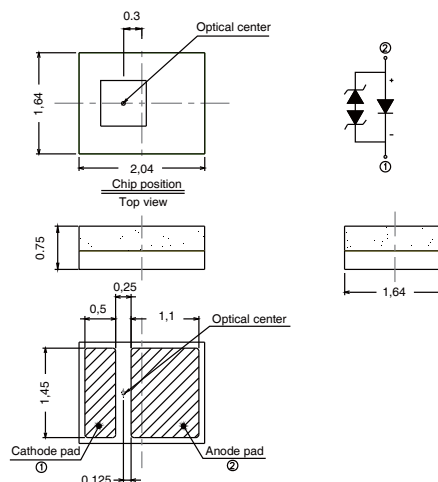


Product	Size (LXWXHmm)	Color	CCT (K)	Typ.Luminous Flux (lm)	Forward Voltage (V)	I _F (mA)
ELCH07-5070J5J7293910-N0	2.04x1.64x0.75	○ White	5000~7000	240	2.95~4.15	1000

Flash LED ■ High Power Flash LED ■ 3333 Package



UNIT : mm

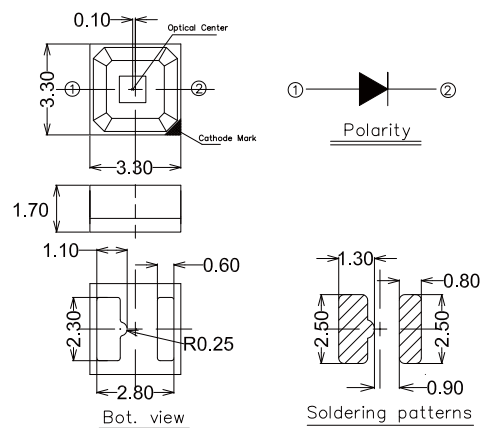


Product	Size (LXWXHmm)	Color	CCT (K)	Typ.Luminous Flux (lm)	Forward Voltage (V)	I _F (mA)
EHP-69/GT01C-P01/TR	3.3x3.3x1.7	○ White	4500~7000	100	2.95~4.15	500

Flash LED ■ Low Power Flash LED ■ Triple Dice



UNIT : mm

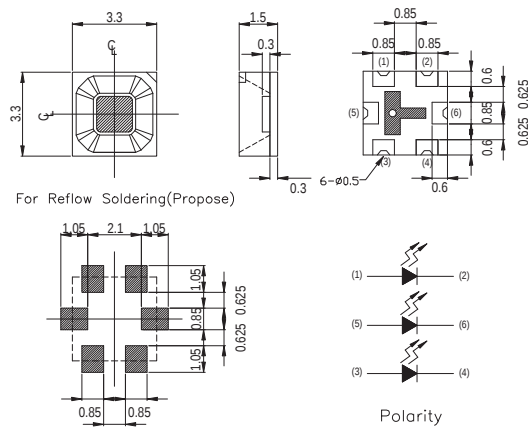


Note: The tolerances unless dimension are $\pm 0.1\text{mm}$.

Product	Size (LXWXH)mm	Color	CCT (K)	Typ. Luminous Intensity (cd)	Forward Voltage (V)	I _F (mA)
69-23BUMD/TR8	3.3x3.3x1.5	○White	5000~7000	11	2.7~3.7	20 for each die

Flash LED ■ Low Power Flash LED ■ Four Dice



UNIT : mm

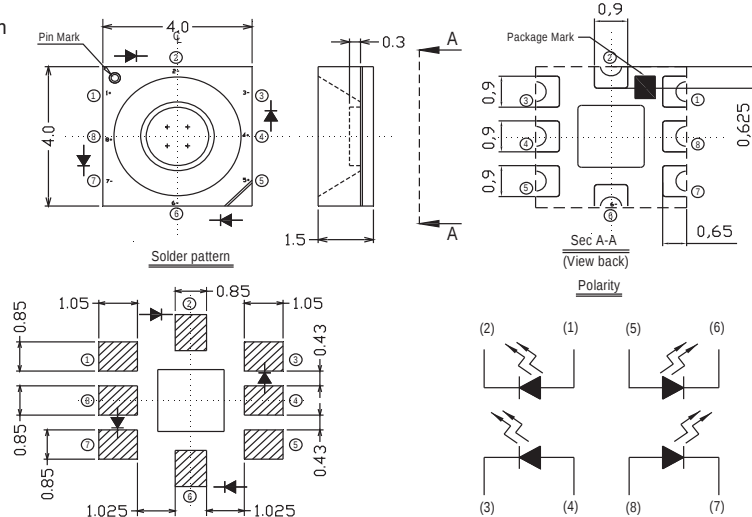


Product	Size (LXWXH)mm	Color	CCT (K)	Typ. Luminous Intensity (cd)	Forward Voltage (V)	I _F (mA)
59-146UTD/TR8	4x4x1.5	○White	4500~7000	11	2.8~3.7	20mA for each die

SMD LED I Subminiature LED Lamps (Leadframe)




UNIT : mm

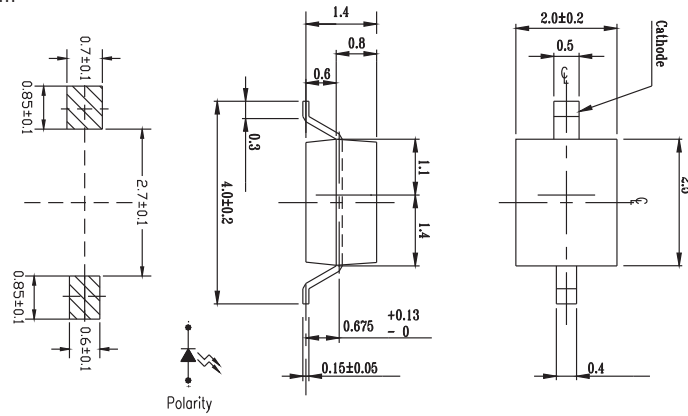

Product	Size (LXWXHmm)	Color	λ_d (nm)/ CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min. (V)	V_F Typ. (V)	V_F Max. (V)	I_F (mA)
28-21SDRC/S530-A3/TR8	2.5x2.0x1.4	Deep Red	639	20 / 27	N	1.7	2	2.4	20
28-21SURC/S530-A2/TR8	2.5x2.0x1.4	Hyper Red	624	11 / 26	N	N	2	2.4	20
28-21UYC/S530-A3/TR8	2.5x2.0x1.4	Super Yellow	589	21 / 33	N	N	2	2.4	20



UNIT : mm

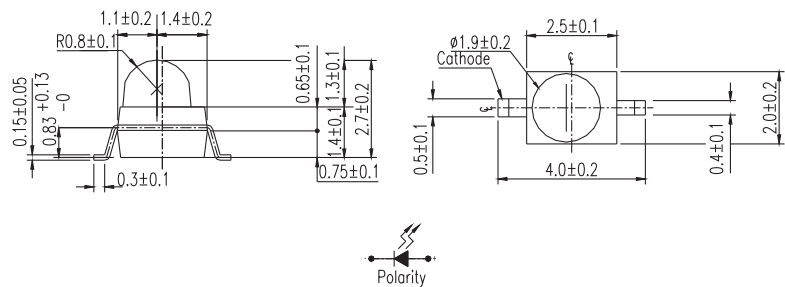


Product	Size (LXWXHmm)	Color	λ_d (nm)/ CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min. (V)	V_F Typ. (V)	V_F Max. (V)	I_F (mA)
91-21SUBC/S400-A4/TR7	2.0x2.5x2.7	Super Blue	470	400 / 500	N	N	3.5	4.3	20
91-21SUGC/S400-A4/TR7	2.0x2.5x2.7	Super Green	525	2000 / 2300	N	N	3.5	4.3	20
91-21SURC/S530-A6/TR7	2.0x2.5x2.7	Hyper Red	624	802 / 1232	N	N	2	2.4	20
91-21SYGC/S530-E4/TR7	2.0x2.5x2.7	Super Yellow Green	573	528 / 594	N	N	2	2.4	20
91-21UBC/C430/TR7	2.0x2.5x2.7	Blue	466	160 / 203	N	N	3.8	4.5	20
91-21USRC/S530-A4/TR7	2.0x2.5x2.7	Dark Red	631	344 / 578	N	N	2	2.4	20

SMD LED ■ Subminiature LED Lamps (Leadframe)




UNIT : mm

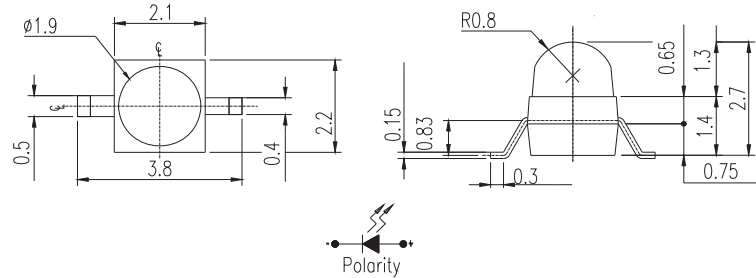

Product	Size (LXWXHmm)	Color	λ_d (nm)/ CIE(x,y)	I_V Min./Typ. (mcd)	I_V Max. (mcd)	V_F Min. (V)	V_F Typ. (V)	V_F Max. (V)	I_F (mA)
95-21SUGC/S400-A4/TR7	2.1x 2.2x2.7	● Super Green	525	2000 / 2300	N	N	3.5	4.3	20
95-21SYGC/S530-E2/TR7	2.1x 2.0x2.7	● Brilliant Yellow Green	573	264 / 330	N	1.7	2	2.4	20
95-21USRD/S357/TR7	2.1x 2.2x2.7	● Dark Red	631	45 / 100	N	N	2	2.4	20
95-21UYC/S530-A5/TR7	2.1x 2.2x2.7	● Super Yellow	589	793 / 1156	N	N	2	2.4	20



UNIT : mm

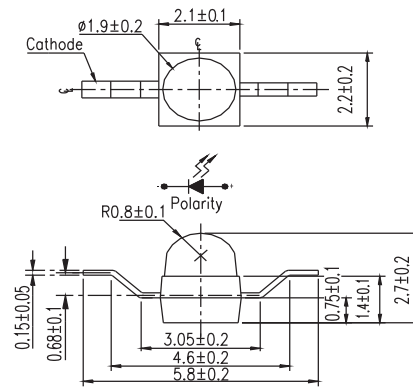


95-21F10/TR10

Product	Size (LXWXHmm)	Color	λ_d (nm)/ CIE(x,y)	I_V Min./Typ. (mcd)	I_V Max. (mcd)	V_F Min. (V)	V_F Typ. (V)	V_F Max. (V)	I_F (mA)
95-21SDRC/S530-A3/TR10	2.1x 2.2x2.7	● Brilliant Red	639	330 / 495	N	1.7	2	2.4	20
95-21SUBC/S400-A5/TR10	2.1x 2.2x2.7	● Super Blue	470	500 / 800	N	N	3.5	4.3	20

SMD LED | Surface Mount Chip LED (PCB) | Top View LED




UNIT : mm

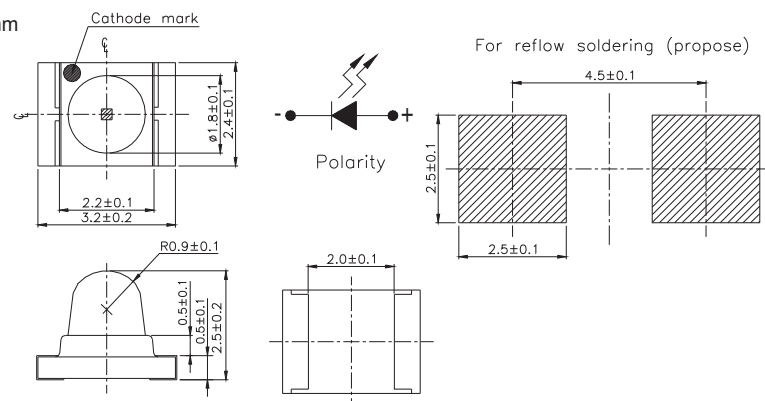

Product	Size (LXWXHmm)	Color	λ_d (nm)/ CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
42-21/BHC-AUW/1T	3.2x2.4x2.5	Blue	470	450	1800	2.7 / 3.3	3.7	20



UNIT : mm

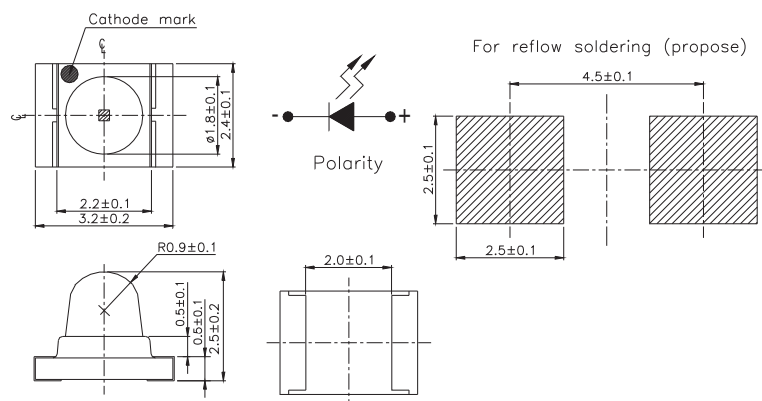


Product	Size (LXWXHmm)	Color	λ_d (nm)/ CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
42-21A/BHC-ZV1W2N/1T	3.2x2.4x2.5	Blue	470	715	1800	2.65	3.75	20
42-21A/GHC-YX1Y2N/1T	3.2x2.4x2.5	Brilliant Green	525	1800	4500	2.7	3.7	20

SMD LED ■ Surface Mount Chip LED (PCB) ■ Top View 0402 (0.2T~0.5T)




UNIT : mm

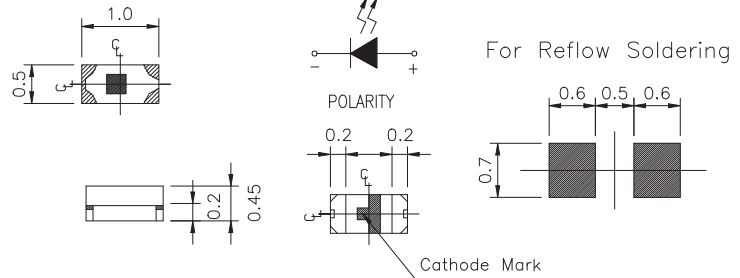


Product	Size (LXWXHmm)	Color	λ_d (nm)/CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
16-213/BHC-AN1P2/3T	1.0x0.5x0.45	Blue	470	28.5	72	2.7 / 3.3	3.7	20
16-213/BHC-ZL1M2QY/3T	1.0x0.5x0.45	Blue	470	11.5	28.5	2.7	3.2	5
16-213/GHC-YR1S1/3T	1.0x0.5x0.45	Brilliant Green	525	112	225	2.7 / 3.3	3.7	20
16-213/R6C-A2225VZ/3T	1.0x0.5x0.45	Brilliant Red	624	20	40.5	1.7	2.2	10
16-213/T3D-AP1Q2QY/3T	1.0x0.5x0.45	Pure White	x=0.29 y=0.30	45	112	2.7	3.2	5
16-213/T7D-AQ1R1QY/3T	1.0x0.5x0.45	Pure White	x=0.29 y=0.30	72	140	2.7	3.2	5




UNIT : mm

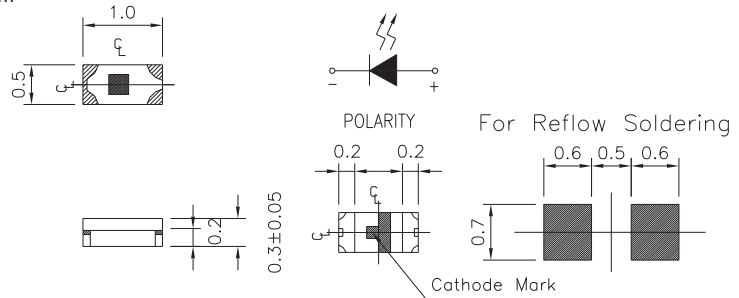

Product	Size (LXWXHmm)	Color	λ_d (nm)/CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
16-216/T3D-AQ1R2TY/3T	1.0x0.5x0.3	Pure White	x=0.29 y=0.30	72	180	2.6	3	5

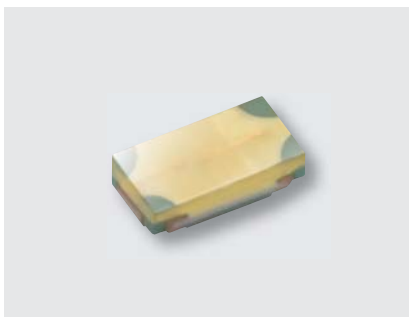

UNIT : mm

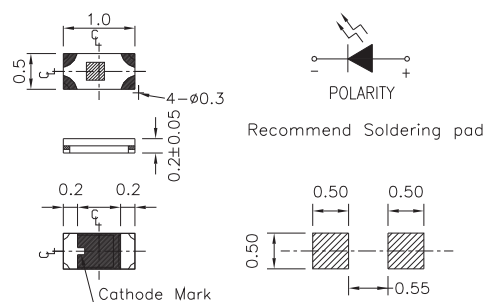


Product	Size (LXWXHmm)	Color	λ_d (nm)/CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
16-219A/T2D-AR2T1QY/3T	1.0x0.5x0.2	Pure White	x=0.29 y=0.30	140	360	2.7	3.2	5

SMD LED ■ Surface Mount Chip LED (PCB) ■ Top View 0603 (0.2T~0.8T)




UNIT : mm

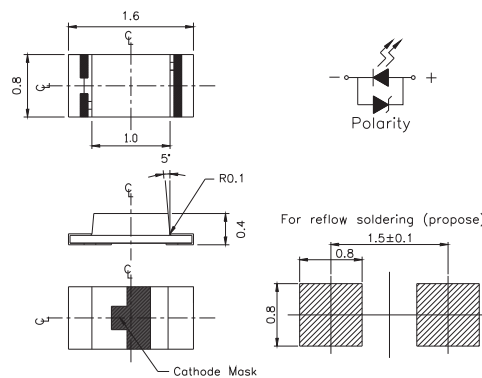

Product	Size (LXWXHmm)	Color	λ_d (nm)/CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
19-117/BHC-YJ2K2TX/3T	1.6x0.8x0.4	● Blue	470	5.8	11.5	2.6	3	2
19-117/BHC-ZL1M2RY/3T	1.6x0.8x0.4	● Blue	470	11.5	28.5	2.5	3.1	5
19-117/T1D-AP2Q2QY/3T	1.6x0.8x0.4	○ Pure White	x=0.274 y=0.226	57	112	2.7	3.2	5



UNIT : mm

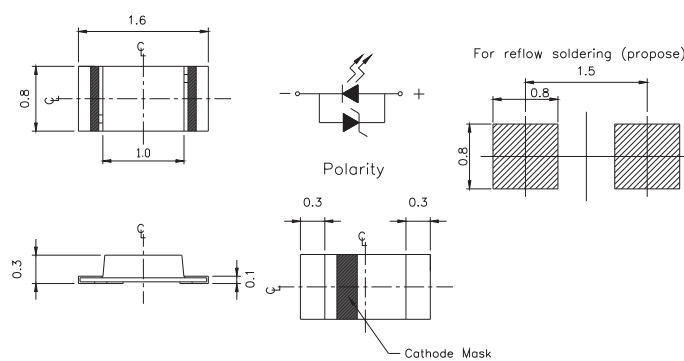


Product	Size (LXWXHmm)	Color	λ_d (nm)/CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
19-118/BHC-ZL1M2QY/3T	1.6x0.8x0.3	● Blue	470	11.5	28.5	2.7	3.2	5

SMD LED ■ Surface Mount Chip LED (PCB) ■ Top View 0603 (0.2T~0.8T)



UNIT : mm

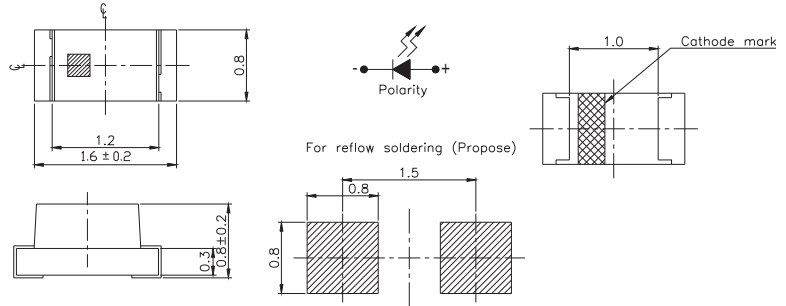


Product	Size (LXWXHmm)	Color	λ_d (nm)/CIE(x,y)	I_V Min./Typ. (mcd)	I_V Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
19-21/B6C-AP2Q2M/3T	1.6x0.8x0.8	● Blue	470	57	112	2.75	3.95	20
19-21/BHC-AP1Q2/3T	1.6x0.8x0.8	● Blue	470	45	112	2.7 / 3.3	3.7	20
19-21/BHC-YL1M1RY/3T	1.6x0.8x0.8	● Blue	470	11.5	22.5	2.5	3.1	5
19-21/BHC-ZQ1R2N/3T	1.6x0.8x0.8	● Blue	470	72	180	2.7	3.7	20
19-21/G6C-AL1M2LY/3T	1.6x0.8x0.8	● Brilliant Yellow Green	573	11.5	28.5	1.7	2.3	5
19-21/G6C-FM1N2B/3T	1.6x0.8x0.8	● Brilliant Yellow Green	573	18	45	1.75	2.35	20
19-21/G6C-FP1Q1L/3T	1.6x0.8x0.8	● Brilliant Yellow Green	573	45	90	1.7	2.3	20
19-21/GHC-YN1P2QY/3T	1.6x0.8x0.8	● Brilliant Green	525	28.5	72	2.7	3.2	5
19-21/GPC-FL1M2B/3T	1.6x0.8x0.8	● Green	562	11.5	28.5	1.75	2.35	20
19-21/R6C-AL2N1VY/3T	1.6x0.8x0.8	● Brilliant Red	624	14.5	36	1.7	2.2	5
19-21/R6C-FP1Q2L/3T	1.6x0.8x0.8	● Brilliant Red	624	45	112	1.7	2.3	20
19-21/R7C-AK1L2BY/3T	1.6x0.8x0.8	● Deep Red	631	7.2	18	1.75	2.35	5
19-21/R7C-AN2Q1B/3T	1.6x0.8x0.8	● Deep Red	631	36	90	1.75	2.35	20
19-21/R8C-FN2Q1L/3T	1.6x0.8x0.8	● Deep Red	639	36	90	1.7	2.3	20
19-21/S2C-AL2M2VY/3T	1.6x0.8x0.8	● Brilliant Orange	605	14.5	28.5	1.7	2.2	5
19-21/S2C-AQ1R2B/3T	1.6x0.8x0.8	● Brilliant Orange	605	72	180	1.75	2.35	20
19-21/T1D-ANPHY/3T	1.6x0.8x0.8	○ Pure White	x=0.274 y=0.226	28.5	72	2.7	3.15	5
19-21/T1D-CPQTY/3T	1.6x0.8x0.8	○ Pure White	x=0.274 y=0.226	45	112	2.6	3	5
19-21/W1D-ANPHY/3T	1.6x0.8x0.8	○ Pure White	x=0.274 y=0.226	28.5	72	2.7	3.15	5
19-21/Y2C-AL1M2VY/3T	1.6x0.8x0.8	● Brilliant Yellow	589	11.5	28.5	1.7	2.2	5
19-21/Y2C-CP1Q2B/3T	1.6x0.8x0.8	● Brilliant Yellow	589	45	112	1.75	2.35	20


SMD LED ■ Surface Mount Chip LED (PCB) ■ Top View 0603 (0.2T~0.8T)




UNIT : mm

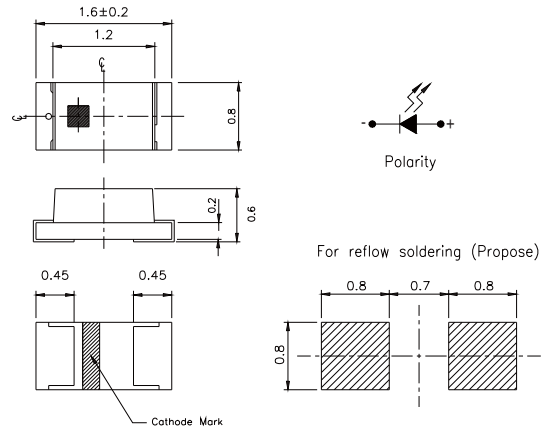

Product	Size (LXWXHmm)	Color	λ_d (nm)/CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
19-213A/T1D-CP2Q2HY/3T	1.6x0.8x0.6	○ Pure White	x=0.274 y=0.226	57	112	2.7	3.15	5

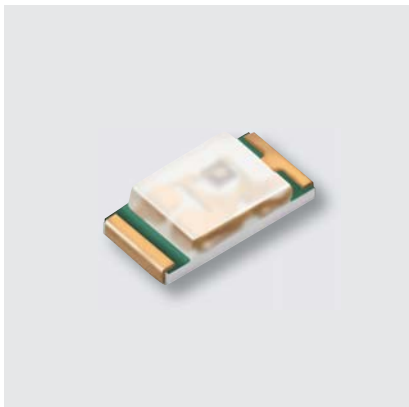

UNIT : mm

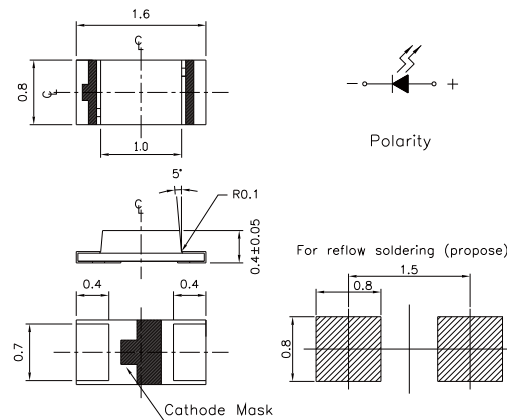


Product	Size (LXWXH mm)	Color	λ_d (nm)/CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
19-217/B9C-ANQE/3T	1.6x0.8x0.4	● Blue	470	28.5	112	2.75	3.65	20
19-217/BHC-AN1P2/3T	1.6x0.8x0.4	● Blue	470	28.5	72	2.7 / 3.3	3.7	20
19-217/BHC-XK1L2B11X/3T	1.6x0.8x0.4	● Blue	470	7.2	18	2.6	2.9	2
19-217/BHC-YL2M2TY/3T	1.6x0.8x0.4	● Blue	470	14.5	28.5	2.6	3	5
19-217/G7C-AL1M2B/3T	1.6x0.8x0.4	● Brilliant Yellow Green	573	11.5	28.5	1.75	2.35	20
19-217/GHC-YR1S2/3T	1.6x0.8x0.4	● Brilliant Green	525	112	285	2.7 / 3.3	3.7	20
19-217/R6C-P1Q2/3T	1.6x0.8x0.4	● Brilliant Red	624	45	112	1.7/2	2.4	20
19-217/S2C-AL1M2VY/3T	1.6x0.8x0.4	● Brilliant Orange	605	11.5	28.5	1.7	2.2	5
19-217/S3C-AL2N1VY/3T	1.6x0.8x0.4	● Reddish Orange	615	14.5	36	1.7	2.2	5
19-217/T1D-ANPHY/3T	1.6x0.8x0.4	○ Pure White	x=0.274 y=0.226	28.5	72	2.7	3.15	5
19-217/T1D-JP1Q2QY/3T	1.6x0.8x0.4	○ Pure White	x=0.274 y=0.226	45	112	2.7	3.2	5
19-217/T7D-CS2T2B2/3T	1.6x0.8x0.4	○ Pure White	x=0.274 y=0.226	225	450	2.9	3.6	20
19-217/W1D-CPQTY/3T	1.6x0.8x0.4	○ Pure White	x=0.274 y=0.226	45	112	2.6	3	5
19-217/Y5C-AM1N1VY/3T	1.6x0.8x0.4	● Brilliant Yellow	589	16	40	1.65	2.25	5
19-217/Y5C-APQB/3T	1.6x0.8x0.4	● Brilliant Yellow	589	45	112	1.75	2.35	20
19-217/Y5C-AQ2R2/3T	1.6x0.8x0.4	● Brilliant Yellow	589	90	180	1.7/2	2.4	20

SMD LED ■ Surface Mount Chip LED (PCB) ■ Top View 0603 (0.2T~0.8T)



UNIT : mm

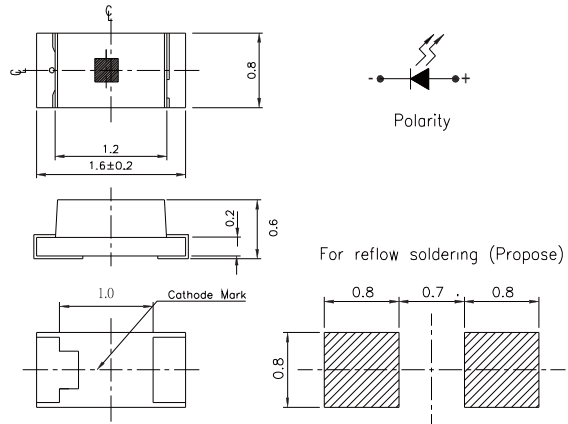


Product	Size (LXWXHmm)	Color	λ_d (nm)/CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
19-213 /Y2C-CQ1R2/3T	1.6x0.8x0.6	● Brilliant Yellow	589	72	180	1.7 / 2	2.4	20
19-213/B7C-AQ2S1B2/3T	1.6x0.8x0.6	● Blue	470	90	225	2.9	3.6	20
19-213/BHC-AN1P2/3T	1.6x0.8x0.6	● Blue	470	28.5	72	2.7 / 3.3	3.7	20
19-213/G6C-AP1Q2/3T	1.6x0.8x0.6	● Brilliant Yellow Green	573	45	112	2	2.4	20
19-213/G6C-BM1N2B/3T	1.6x0.8x0.6	● Brilliant Yellow Green	573	18	45	1.75	2.35	20
19-213/G6C-FN2Q1L/3T	1.6x0.8x0.6	● Brilliant Yellow Green	573	36	90	1.7	2.3	20
19-213/G6W-FN1P1B/3T	1.6x0.8x0.6	● Brilliant Yellow Green	573	28.5	57	1.75	2.35	20
19-213/GHC-XS1T1N/3T	1.6x0.8x0.6	● Brilliant Green	525	180	360	2.7	3.7	20
19-213/GHC-YP1Q2QY/3T	1.6x0.8x0.6	● Brilliant Green	525	45	112	2.7	3.2	5
19-213/GHC-YR1S2/3T	1.6x0.8x0.6	● Brilliant Green	525	112	285	3.5	4	20
19-213/R6C-AM2P1VY/3T	1.6x0.8x0.6	● Brilliant Red	624	22.5	57	1.7	2.2	5
19-213/R6C-AN1P2/3T	1.6x0.8x0.6	● Brilliant Red	624	28.5	72	1.7/2	2.4	20
19-213/R6C-AN2Q1B/3T	1.6x0.8x0.6	● Brilliant Red	624	36	90	1.75	2.35	20
19-213/R6C-AP1Q2B/3T	1.6x0.8x0.6	● Brilliant Red	624	45	112	1.75	2.35	20
19-213/R6C-AQ1R2B/3T	1.6x0.8x0.6	● Brilliant Red	624	72	180	1.75	2.35	20
19-213/R8C-FN1P2/3T	1.6x0.8x0.6	● Deep Red	639	28.5	72	1.7 / 2	2.4	20
19-213/S2C-AN1P2B/3T	1.6x0.8x0.6	● Brilliant Orange	605	28.5	72	1.75	2.35	20
19-213/S3C-AN2P2B/3T	1.6x0.8x0.6	● Reddish Orange	615	36	72	1.75	2.35	20
19-213/T1D-ANPHY/3T	1.6x0.8x0.6	○ Pure White	x=0.274 y=0.226	28.5	72	2.7	3.15	5
19-213/Y2C-AP1Q2B/3T	1.6x0.8x0.6	● Brilliant Yellow	589	45	112	1.75	2.35	20
19-213/Y2C-CN1P2/3T	1.6x0.8x0.6	● Brilliant Yellow	589	28.5	72	1.7 / 2	2.4	20
19-213/Y2C-CP1Q2L/3T	1.6x0.8x0.6	● Brilliant Yellow	589	45	112	1.7	2.3	20
19-213/Y2C-CQ2R2L/3T	1.6x0.8x0.6	● Brilliant Yellow	589	90	180	1.7	2.3	20

SMD LED ■ Surface Mount Chip LED (PCB) ■ Top View 0603 (0.2T~0.8T)




UNIT : mm

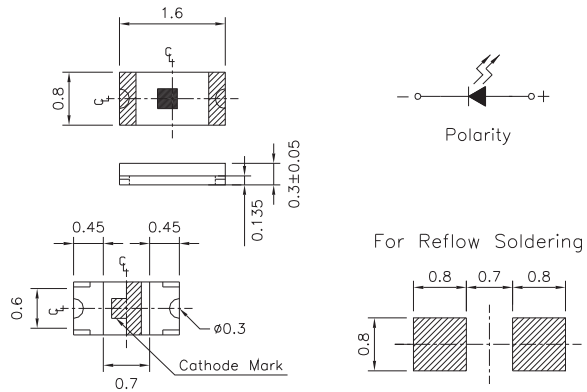

Product	Size (LXWXHmm)	Color	λ_d (nm)/CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
19-218/BHC-ZL1M2QY/3T	1.6x0.8x0.3	● Blue	470	11.5	28.5	2.7	3.2	5
19-218/GHC-YR1S2M/3T	1.6x0.8x0.3	● Brilliant Green	525	112	285	2.75	3.95	20
19-218/R6C-AL1M2VY/3T	1.6x0.8x0.3	● Brilliant Red	624	11.5	28.5	1.7	2.2	5
19-218/R6C-FM2P1B7Y/3T	1.6x0.8x0.3	● Brilliant Red	624	22.5	57	1.7	2	5
19-218/T1D-CQ2R2TY/3T	1.6x0.8x0.3	○ Pure White	x=0.274 y=0.226	90	180	2.6	3	5



UNIT : mm

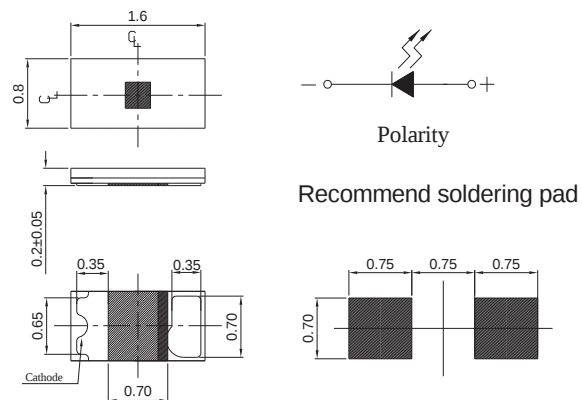


Product	Size (LXWXHmm)	Color	λ_d (nm)/CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
19-219/T3D-AQ2R2TY/3T	1.6x0.8x0.2	○ Pure White	x=0.274 y=0.226	90	180	2.6	3	5
19-219/T7D-AV1W1E/3T	1.6x0.8x0.2	○ Pure White	x=0.274 y=0.226	715	1420	2.75	3.65	20
19-219/Y5C-AM1N2VY/3T	1.6x0.8x0.2	● Brilliant Yellow	589	18	45	1.7	2.2	5

SMD LED | Surface Mount Chip LED (PCB) | Top View 0805




UNIT : mm

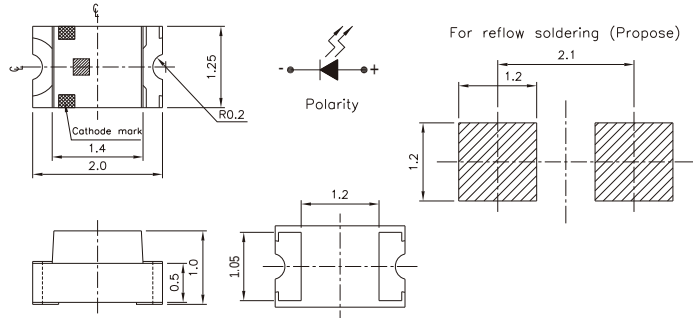

Product	Size (LXWXHmm)	Color	λ_d (nm)/CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
17-11/BHC-AN1P2/3T	2.0x1.25x1.0	Blue	470	28.5	72	2.7 / 3.3	3.7	20



UNIT : mm

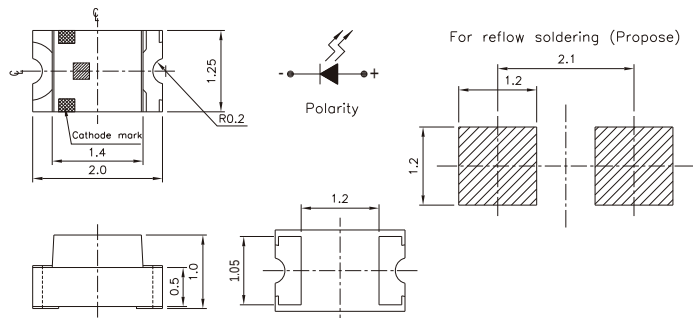


Product	Size (LXWXHmm)	Color	λ_d (nm)/CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
17-21/BHC-AN1P2/3T	2.0x1.25x1.0	Blue	470	28.5	72	3.5	4	20
17-21/BHC-AP1Q2/3T	2.0x1.25x1.0	Blue	470	45	112	2.7 / 3.3	3.7	20
17-21/BHC-XLMJY/3T	2.0x1.25x1.0	Blue	470	11.5	28.5	2.7	3.1	5
17-21/G6C-AN1P1B/3T	2.0x1.25x1.0	Brilliant Yellow Green	573	28.5	57	1.75	2.35	20
17-21/G6C-AP1Q1B/3T	2.0x1.25x1.0	Brilliant Yellow Green	573	45	90	1.75	2.35	20
17-21/G6C-FM1N2B/3T	2.0x1.25x1.0	Brilliant Yellow Green	573	18	45	1.75	2.35	20
17-21/G6C-FN1P2B/3T	2.0x1.25x1.0	Brilliant Yellow Green	573	28.5	72	1.75	2.35	20
17-21/G6C-FP1Q1B/3T	2.0x1.25x1.0	Brilliant Yellow Green	573	45	90	1.75	2.35	20
17-21/GHC-XS1T2M/3T	2.0x1.25x1.0	Brilliant Green	525	180	450	2.75	3.95	20
17-21/GHC-YR1S2/3T	2.0x1.25x1.0	Brilliant Green	525	112	285	3.5	4	20
17-21/GPC-AK0M1B/3T	2.0x1.25x1.0	Green	562	7.2	22.5	1.75	2.35	20
17-21/GVC-AMPB/3T	2.0x1.25x1.0	Green	565	18	72	1.75	2.35	20
17-21/R6C-AN2Q1B/3T	2.0x1.25x1.0	Brilliant Red	624	36	90	1.75	2.35	20
17-21/R6C-AP1Q2L/3T	2.0x1.25x1.0	Brilliant Red	624	45	112	1.7	2.3	20
17-21/R7C-AN2Q1B/3T	2.0x1.25x1.0	Deep Red	631	36	90	1.75	2.35	20
17-21/S2C-AN1P2B/3T	2.0x1.25x1.0	Brilliant Orange	605	28.5	72	1.75	2.35	20
17-21/S2C-AP1Q2B/3T	2.0x1.25x1.0	Brilliant Orange	605	45	112	1.75	2.35	20
17-21/T1D-ANPHY/3T	2.0x1.25x1.0	○ Pure White	x=0.274 y=0.226	28.5	72	2.7	3.15	5
17-21/T1D-CP2R1TY/3T	2.0x1.25x1.0	○ Pure White	x=0.274 y=0.226	57	140	2.6	3	5
17-21/T1D-KN2P2HY/3T	2.0x1.25x1.0	○ Pure White	x=0.274 y=0.226	36	72	2.7	3.15	5
17-21/W1D-APQHY/3T	2.0x1.25x1.0	○ Pure White	x=0.274 y=0.226	45	112	2.7	3.15	5
17-21/Y2C-AN1P2/3T	2.0x1.25x1.0	Brilliant Yellow	589	28.5	72	1.7 / 2	2.4	20
17-21/Y2C-CN1P2B/3T	2.0x1.25x1.0	Brilliant Yellow	589	28.5	72	1.75	2.35	20
17-21/Y2C-CP2Q2B/3T	2.0x1.25x1.0	Brilliant Yellow	589	57	112	1.75	2.35	20

SMD LED | Surface Mount Chip LED (PCB) | Top View 0805




UNIT : mm

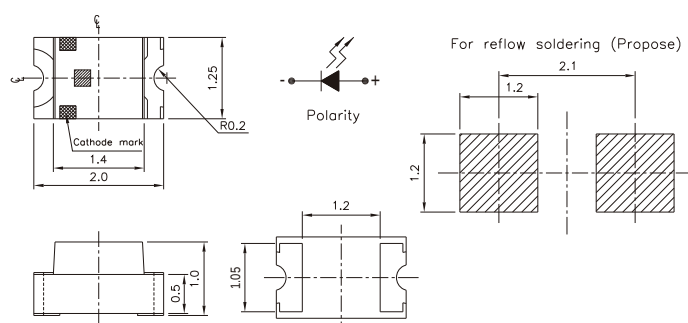

Product	Size (LXWXHmm)	Color	Drive current	I _v (mcd)	Wavelength (nm)	V _F (V)	Viewing Angle (°)
17-21-S3C-6FQ2R2L0E-3T-AM	2x1.25x1	Orange	20 mA	90~180	613~622	1.7~2.3	140
17-21-GPC-A0L1M2B0E-3T-AM	2x1.25x1	Green	20 mA	11.2~28	557.5~567.5	1.75~2.35	140
17-21-Y2C-A0L1M2V0B-3T-AM	2x1.25x1	Yellow	5 mA	11.2~28	585.5~594.5	1.7~2.2	140
17-21-R7C-A0N1P2B0C-3T-AM	2x1.25x1	Red	10 mA	28~71	625.5~637.5	1.75~2.35	140




UNIT : mm

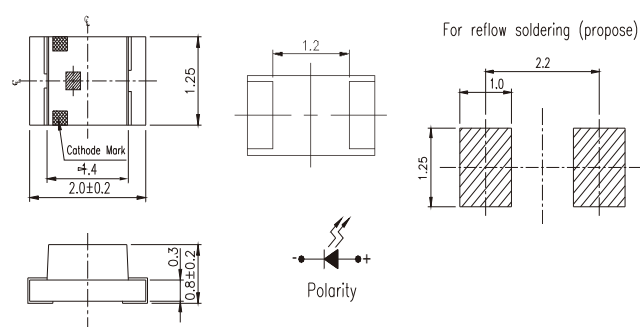


Product	Size (LXWXHmm)	Color	λ _d (nm)/ CIE(x,y)	I _v Min./Typ. (mcd)	I _v Max. (mcd)	V _F Min./Typ. (V)	V _F Max. (V)	I _F (mA)
17-215/B6C-YP2R2/3T	2.0x1.25x0.8	Blue	470	57	180	2.7 / 3.0	3.7	20
17-215/BHC-AN1P2/3T	2.0x1.25x0.8	Blue	470	28.5	72	2.7 / 3.3	3.7	20
17-215/BHC-BP2Q2M/3T	2.0x1.25x0.8	Blue	470	57	112	2.75	3.95	20
17-215/G6C-BM1N2L/3T	2.0x1.25x0.8	Brilliant Yellow Green	573	18	45	1.7	2.3	20
17-215/G6C-FN2P2B/3T	2.0x1.25x0.8	Brilliant Yellow Green	573	36	72	1.75	2.35	20
17-215/R6C-AQ1R2B/3T	2.0x1.25x0.8	Brilliant Red	624	72	180	1.75	2.35	20
17-215/S2C-AQ1R2B/3T	2.0x1.25x0.8	Brilliant Orange	605	72	180	1.75	2.35	20
17-215/S2C-CP2R1B/3T	2.0x1.25x0.8	Brilliant Orange	605	57	180	1.75	2.35	20

SMD LED | Surface Mount Chip LED (PCB) | Top View 1206

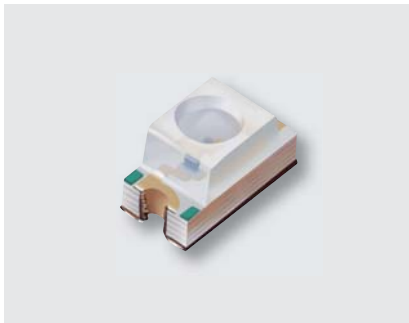


UNIT : mm

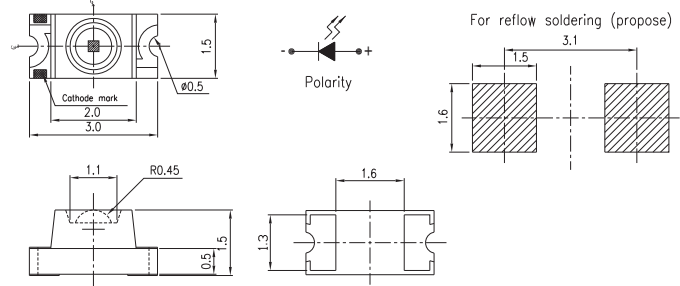

Product	Size (LXWXHmm)	Color	λ_d (nm)/CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
11-21/BHC-AP2R1/2T	3.0x1.5x1.5	Blue	470	57	140	3.5	4.3	20
11-21/BHC-YR1S1/2T	3.0x1.5x1.5	Blue	470	112	225	2.7 / 3.3	3.7	20
11-21/G6C-BQ1R2B/2T	3.0x1.5x1.5	Brilliant Yellow Green	573	72	180	1.75	2.35	20
11-21/G6C-FN2P2B/2T	3.0x1.5x1.5	Brilliant Yellow Green	573	36	72	1.75	2.35	20
11-21/GHC-YT1U2/2T	3.0x1.5x1.5	Brilliant Green	525	285	715	3.5 / 4.3	--	20
11-21/R6C-AP1Q2LZ/2T	3.0x1.5x1.5	Brilliant Red	624	45	112	1.7	2.3	10
11-21/R6C-AR2S2B/2T	3.0x1.5x1.5	Brilliant Red	624	140	285	1.75	2.35	20
11-21/Y2C-CP2Q2B/2T	3.0x1.5x1.5	Brilliant Yellow	589	57	112	1.75	2.35	20



UNIT : mm

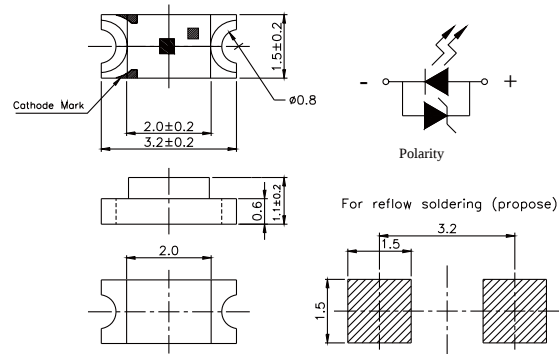


Product	Size (LXWXHmm)	Color	λ_d (nm)/CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
15-11/BHC-AN1P2/2T	3.2x1.5x1.0	Blue	470	28.5	72	2.7 / 3.3	3.7	20
15-11/BHC-ZL2N1QY/2T	3.2x1.5x1.0	Blue	470	14.5	36	2.7	3.2	5
15-11/W1D-APQHY/2T	3.2x1.5x1.0	○ Pure White	x=0.274 y=0.226	45	112	2.7	3.15	5

SMD LED | Surface Mount Chip LED (PCB) | Top View 1206




UNIT : mm

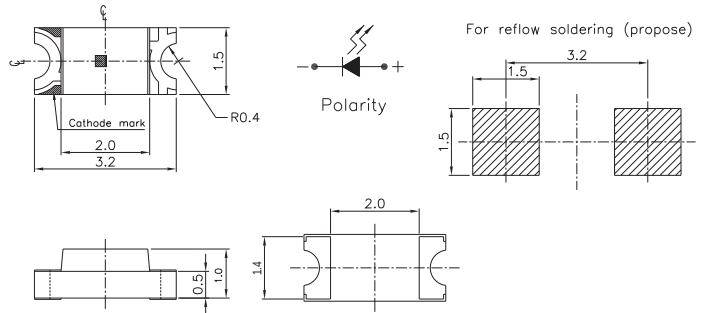

Product	Size (LXWXHmm)	Color	λ_d (nm)/CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
15-21/B6C-YR1S2B2/2T	3.2x1.5x1.0	Blue	470	112	285	2.9	3.6	20
15-21/B6C-ZQ1R1N/2T	3.2x1.5x1.0	Blue	470	72	140	2.7	3.7	20
15-21/BHC-AN1P2/2T	3.2x1.5x1.0	Blue	470	28.5	72	2.7 / 3.3	3.7	20
15-21/G6C-BK1L2VY/2T	3.2x1.5x1.0	Brilliant Yellow Green	573	7.2	18	1.7	2.2	5
15-21/G6C-FM1N2B/2T	3.2x1.5x1.0	Brilliant Yellow Green	573	18	45	1.75	2.35	20
15-21/G6C-FP1Q1L/2T	3.2x1.5x1.0	Brilliant Yellow Green	573	45	90	1.7	2.3	20
15-21/GHC-R2S2/2T	3.2x1.5x1.0	Brilliant Green	525	140	285	2.7 / 3.3	3.7	20
15-21/GHC-YR1S1/2T	3.2x1.5x1.0	Brilliant Green	525	112	225	3.5	3.7	20
15-21/R6C-AN1P2/2T	3.2x1.5x1.0	Brilliant Red	624	28.5	72	1.7/2	2.4	20
15-21/R6C-FQ1R1B/2T	3.2x1.5x1.0	Brilliant Red	624	72	140	1.75	2.35	20
15-21/S2C-AL2M2VY/2T	3.2x1.5x1.0	Brilliant Orange	605	14.5	28.5	1.7	2.2	5
15-21/S2C-AQ2R2B/2T	3.2x1.5x1.0	Brilliant Orange	605	90	180	1.75	2.35	20
15-21/S3C-AP1Q2/2T	3.2x1.5x1.0	Reddish Orange	615	45	112	1.7 / 2.0	2.4	20
15-21/T1D-CP1Q2TY/2T	3.2x1.5x1.0	Pure White	x=0.274 y=0.226	45	112	2.6	3	5
15-21/T7D-JQ2S1PY/2T	3.2x1.5x1.0	Pure White	x=0.274 y=0.226	90	225	2.7	3.3	5
15-21/W1D-APQHY/2T	3.2x1.5x1.0	Pure White	x=0.274 y=0.226	45/72	112	2.7 / 2.9	3.15	5
15-21/Y2C-AN1P2/2T	3.2x1.5x1.0	Brilliant Yellow	589	28.5	72	1.7/2	2.4	20
15-21/Y2C-CP1Q2B/2T	3.2x1.5x1.0	Brilliant Yellow	589	45	112	1.75	2.35	20



UNIT : mm

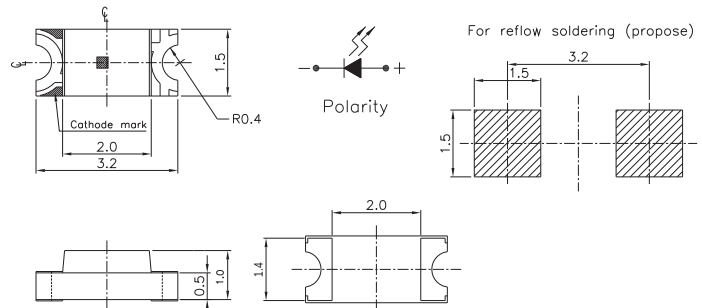


Product	Size (LXWXHmm)	Color	Drive current (mA)	I_v (mcd)	Wavelength (nm)	V_F (V)	Viewing Angle (°)
15-21-Y2C-A0P1Q2B0E-2T-AM	3.2x1.5x1	Yellow	20	45~112	585.5~594.5	1.75~2.35	130
15-21-G6C-A0N1P2B0E-2T-AM	3.2x1.5x1	Brilliant Yellow Green	20	28~71	569.5~577.5	1.75~2.35	130
15-21-R6C-B0Q1R2B0E-2T-AM	3.2x1.5x1	Red	20	71~180	617.5~629.5	1.75~2.35	130
15-21-S2C-A0N2P2L0B-2T-AM	3.2x1.5x1	Orange	5	35.5~71	600.5~612.5	1.7~2.3	130

SMD LED ■ Surface Mount Chip LED (PCB) ■ Top View 1206



UNIT : mm

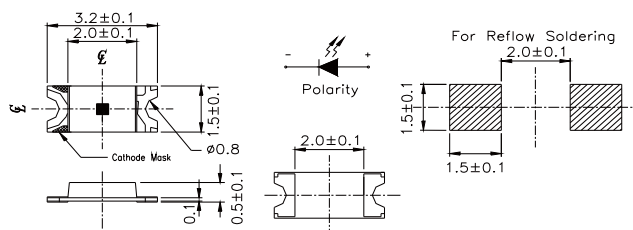


Product	Size (LXWXHmm)	Color	λ_d (nm)/CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
15-215/G7C-BN1P2B/2T	3.2x1.5x0.5	● Brilliant Yellow Green	573	28.5	72	1.75	2.35	20
15-215/R6C-AM2P1VY/2T	3.2x1.5x0.5	● Brilliant Red	624	22.5	57	1.7	2.2	5
15-215/R6C-AP1Q1L/2T	3.2x1.5x0.5	● Brilliant Red	624	45	90	1.7	2.3	20

SMD LED ■ Surface Mount Chip LED (PCB) ■ Top View Bi-Color




UNIT : mm

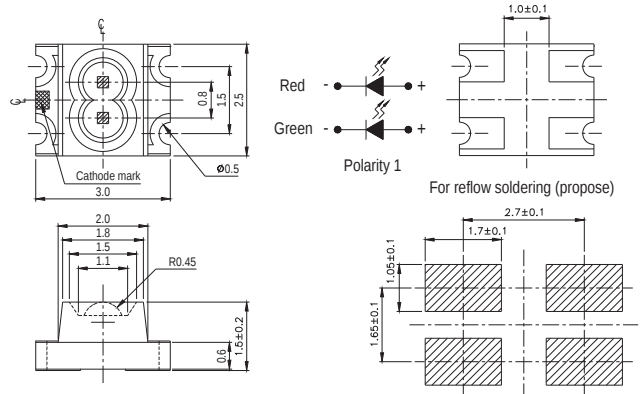

Product	Size (LXWXHmm)	Color	λ_d (nm)/ CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
11-22/R6G6C-A01/2T	3.0x2.5x1.5	● Brilliant Red + ● Brilliant Yellow Green	R6:624 G6:573	R6:140 G6:45	R6:225 G6:72	1.7/2	2.4	20
11-22/R6G6C-QSANP/2T	3.0x2.5x1.5	● Brilliant Red + ● Brilliant Yellow Green	R6:624 G6:573	R6:72 G6:28.5	R6:285 G6:72	2	2.4	20
11-22/R6SGAC-A30/2T	3.0x2.5x1.5	● Brilliant Red + ● Brilliant Yellow Green	R6S:624 SG:565	R6S:450 SG:715	R6S:1120 SG:1800	R6S:1.7 / 2 SG:2.7 / 3.3	R6S:2.4 SG:3.7	20



UNIT : mm

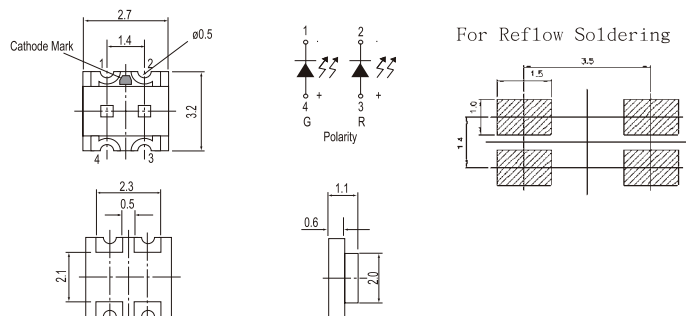


Product	Size (LXWXHmm)	Color	λ_d (nm)/ CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
15-22/R6G6C-A32/2T	3.2x2.7x1.1	● Brilliant Red + ● Brilliant Yellow Green	R6:624 G6:573	R6:28.5 G6:28.5	R6:72 G6:72	R6:1.7 / 2 G6:1.7 / 2	R6:2.4 G6:2.4	20
15-22/R6GHC-A01/2T	3.2x2.7x1.1	● Brilliant Red + ● Brilliant Yellow Green	R6:624 GH:525	R6:90 / 130 GH:112 / 165	--	R6:1.7 / 2 GH:2.7 / 3.3	R6:2.4 GH:3.7	20

SMD LED ■ Surface Mount Chip LED (PCB) ■ Top View Bi-Color




UNIT : mm

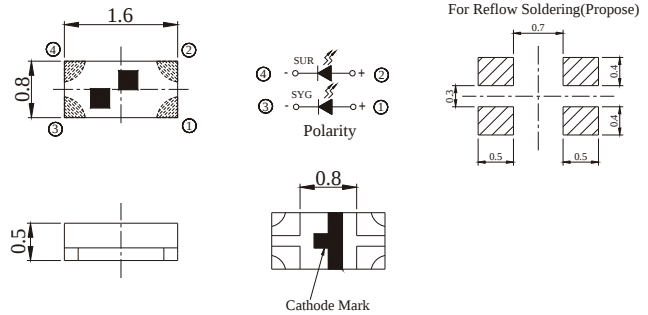

Product	Size (LXWXHmm)	Color	λ_d (nm)/ CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
18-225/B6R6C-C01/3T	1.6x0.8x0.5	Blue + Brilliant Red	B6:470 R6:624	B6:18/28.5 R6:18/28.5	-	B6:2.7/3.3 R6:1.7/2.0	B6:3.7 R6:2.4	5
18-225/R6G6C-A01/3T	1.6x0.8x0.5	Brilliant Red + Brilliant Yellow Green	R6:624 G6:573	R6:45 G6:28.5	R6:112 G6:72	R6:1.7/2 G6:1.7/2	R6:2.4 G6:2.4	20
18-225/S2G6C-A01/3T	1.6x0.8x0.5	Brilliant Orange + Brilliant Yellow Green	S2:605 G6:573	S2:32/48 G6:16/24	-	S2:1.7/2 G6:1.7/2	S2:2.4 G6:2.4	20




UNIT : mm

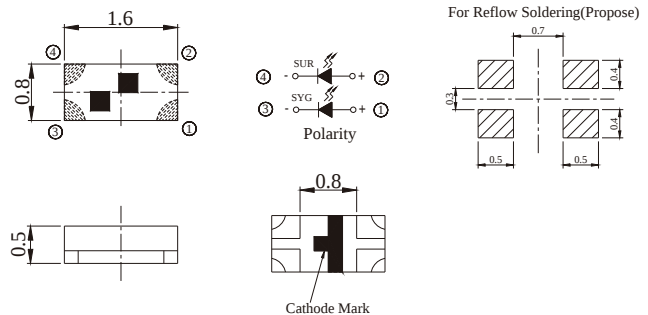

Product	Size (LXWXHmm)	Color	λ_d (nm)/ CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
18-225A/R6GHW-B01/3T	1.6x0.8x0.5	Brilliant Red + Brilliant Green	R6:624 GH:525	R6:28.5 GH:72	R6:72 GH:180	R6:1.7 / 2 GH:2.7 / 3.3	R6:2.4 GH:3.7	10



UNIT : mm

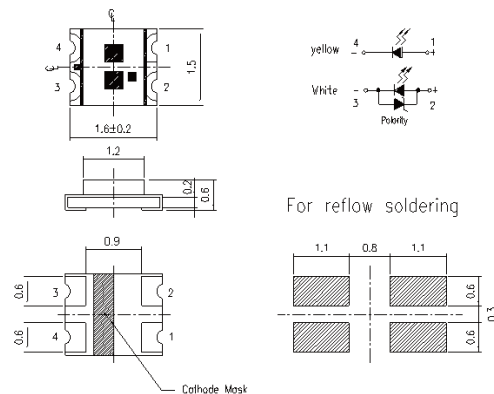


Product	Size (LXWXHmm)	Color	λ_d (nm)/ CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
19-123/Y2ST1D-C30/2T	1.6x1.5x0.6	Brilliant Yellow + Pure White	Y2S:589+ x=0.274 y=0.226	Y2S:28.5 T1:45	Y2S:72 T1:112	Y2S:1.7 / 2 T1:2.7 / 3.3	Y2S:2.4 T1:3.7	5


SMD LED ■ Surface Mount Chip LED (PCB) ■ Top View Bi-Color




UNIT : mm

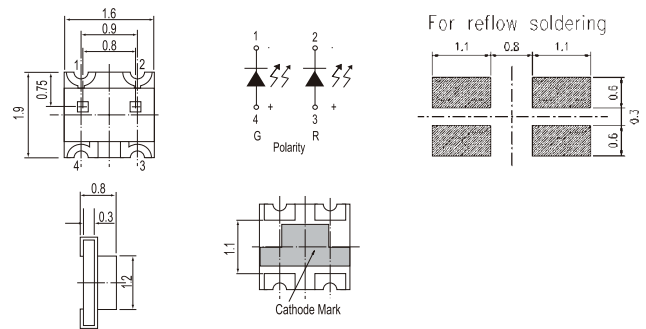

Product	Size (LXWXHmm)	Color	λ_d (nm)/ CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
19-22/G6R6C-A31/2T	1.9x1.6x0.8	● Brilliant Red + ● Brilliant Yellow Green	R6:624 G6:573	R6:45 G6:22.5	R6:90 G6:57	R6:1.7 / 2 G6:1.7 / 2	R6:2.4 G6:2.4	20
19-22/R6BHC-B01/2T	1.9x1.6x0.8	● Brilliant Red + ● Blue	R6:624 BH:470	R6:14.5 / 20 BH:14.5 / 20	—	R6:1.9 BH:2.9	R6:2.3 BH:3.3	5
19-22/R6G6C-A01/2T	1.9x1.6x0.8	● Brilliant Red + ● Brilliant Yellow Green	R6:624 G6:573	R6:45 G6:45	R6:72 G6:72	R6:1.7 / 2 G6:1.7 / 2	R6:2.4 G6:2.4	20
19-22/R6GHC-C02/2T	1.9x1.6x0.8	● Brilliant Red + ● Brilliant Green	R6:624 GH:525	R6:14.5 / 20 GH:45 / 65	—	R6:1.9 GH:2.9	R6:2.3 GH:3.4	5
19-22/Y2G6C-A14/2T	1.9x1.6x0.8	● Brilliant Yellow Green + ● Brilliant Yellow	G6:573 Y2:589	G6:28.5 Y2:45	G6:72 Y2:112	G6:1.7 / 2 Y2:1.7 / 2	G6:2.4 Y2:2.4	20

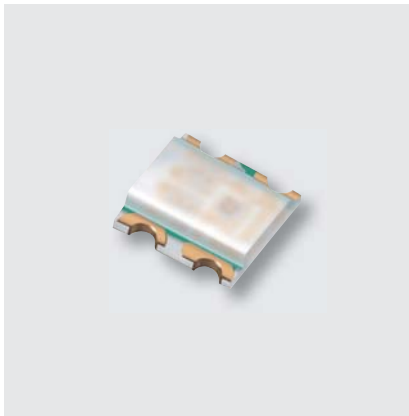

UNIT : mm


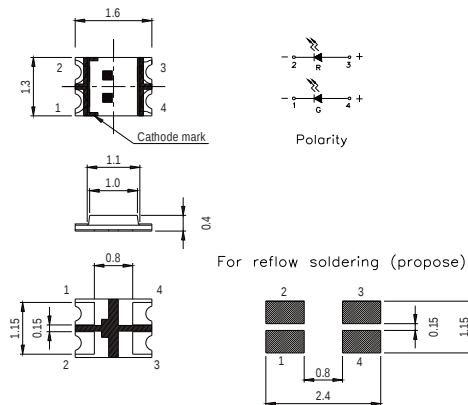


Product	Size (LXWXHmm)	Color	λ_d (nm)/ CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max./Typ. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
19-226/R6BHC-B01/2T	1.6x1.3x0.4	● Brilliant Red + ● Blue	R6:624 BH:470	R6:72 BH:45	Tye: R6:100 BH:80	R6:1.7 / 2 BH:2.7 / 3.3	R6:2.4 BH:3.7	20
19-226/R6G7C-B02/2T	1.6x1.3x0.4	● Brilliant Red + ● Brilliant Yellow Green	R6:624 G7:573	R6:22.5 G7:7.2	Max: R6:57 G7:18	R6:1.7 / 2 G7:1.7 / 2	R6:2.4 G7:2.4	10
19-226/R6GHC-A03/2T	1.6x1.3x0.4	● Brilliant Red + ● Brilliant Green	R6:624 GH:525	R6:72 GH:112	Max: R6:140 GH:225	R6:1.7 / 2 GH:2.7 / 3.3	R6:2.4 GH:3.7	20

SMD LED ■ Surface Mount Chip LED (PCB) ■ Top View Bi-Color




UNIT : mm



Polarity


For reflow soldering




Cathode Mask

Product	Size (LXWXHmm)	Color	λ_d (nm)/ CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
19-223/G6S2C-A01/2T	1.6x1.5x0.6	● Brilliant Orange + ● Brilliant Yellow Green	S2:605 G6:573	S2:112 G6:28.5	S2:140 G6:45	S2:2 G6:2	S2:2.4 G6:2.4	20
19-223/R6BHC-A05/2T	1.6x1.5x0.6	● Brilliant Red + ● Blue	R6:624 BH:470	R6:72 BH:36	R6:180 BH:72	R6:1.7 / 2 BH:2.7 / 3.3	R6:2.4 BH:3.7	20
19-223/R6G6C-A01/2T	1.6x1.5x0.6	● Brilliant Red+ ● Brilliant Yellow Green	R6:624 G6:573	R6:72 G6:22.5	R6:180 G6:57	R6:1.7 / 2 G6:1.7 / 2	R6:2.4 G6:2.4	20
19-223/R7BHC-A30/2T	1.6x1.5x0.6	● Dark Red + ● Blue	R7:631 BH:470	R7:45 BH:36	R7:112 BH:90	R7:1.7 / 2 BH:2.7 / 3.3	R7:2.4 BH:2.7 / 3.7	20
19-223/R7G6C-A01/2T	1.6x1.5x0.6	● Dark Red + ● Brilliant Yellow Green	R7:631 G6:573	R7:18 G6:18	R7:72 G6:72	R7:2 G6:2	R7:2.4 G6:2.4	20
19-223/S2BHC-A01/2T	1.6x1.5x0.6	● Brilliant Orange + ● Blue	S2:605 BH:470	S2:72 BH:36	S2:140 BH:72	S2:1.7 / 2 BH:3	S2:2.4 BH:3.5	20
19-223/S2T1D-C30/2T	1.6x1.5x0.6	● Brilliant Orange + ○ Pure White	S2:605+ x=0.274 y=0.226	S2:18 T1:45	S2:45 T1:112	S2:1.55 T1:2.7	S2:2.15 T1:3.3	5
19-223/Y2G6C-A01/2T	1.6x1.5x0.6	● Brilliant Yellow Green + ● Brilliant Yellow	G6:573 Y2:589	G6:28.5 Y2:36	G6:57 Y2:72	G6:1.7 / 2 Y2:1.7 / 2	G6:2.4 Y2:2.4	20

SMD LED ■ Surface Mount Chip LED (PCB) ■ Top View Full Color

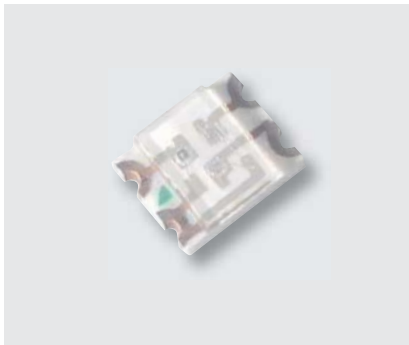


UNIT : mm

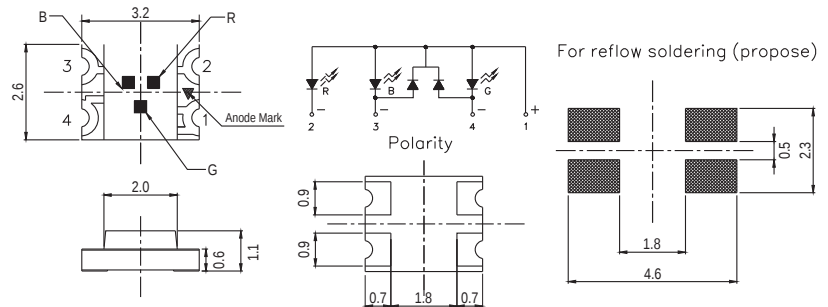


Product	Size (LXWXHmm)	Color	λ_d (nm)/ CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
15-13D/R6GHBHC-A01/2T	3.2x2.6x1.1	- Blue + - Brilliant Red + - Brilliant Green	BH:470 R6:624 GH:525	BH:45 / 70 R6:90 / 140 GH:112 / 180	--	BH:2.7 / 3.3 R6:1.7 / 2 GH:2.7 / 3.3	BH:3.7 R6:2.4 GH:3.7	20




UNIT : mm

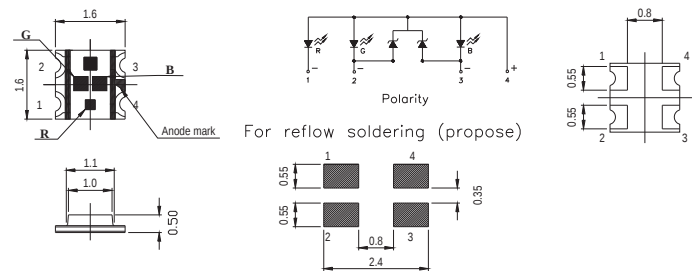

Product	Size (LXWXHmm)	Color	λ_d (nm)/ CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
19-137/R6GHBHC-A01/2T	1.6x1.6x0.5	- Blue + - Brilliant Red + - Brilliant Green	BH:470 R6:624 GH:525	BH:28.5 / 50 R6:72 / 100 GH:112 / 180	--	BH:2.7 / 3.3 R6:1.7 / 2 GH:2.7 / 3.3	BH:3.7 R6:2.4 GH:3.7	20

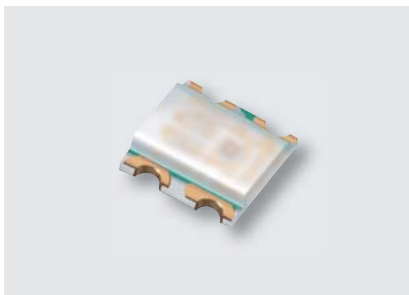


UNIT : mm

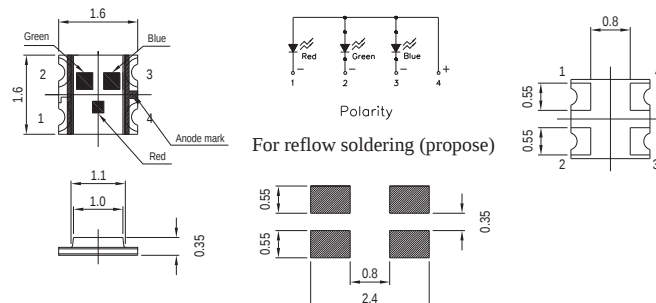


Product	Size (LXWXHmm)	Color	λ_d (nm)/ CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
19-237/R6GHBHC-A04/2T	1.6x1.6x0.35	- Blue + - Brilliant Red + - Brilliant Green	BH:470 R6:624 GH:525	BH:11.5 / 18 R6:18 / 30 GH:28.5 / 60	--	BH:2.6 R6:1.9 GH:2.6	BH:3 R6:2.2 GH:3	5


SMD LED | Surface Mount Chip LED (PCB) | Top View Full Color

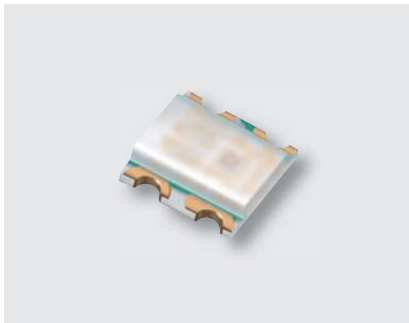


UNIT : mm

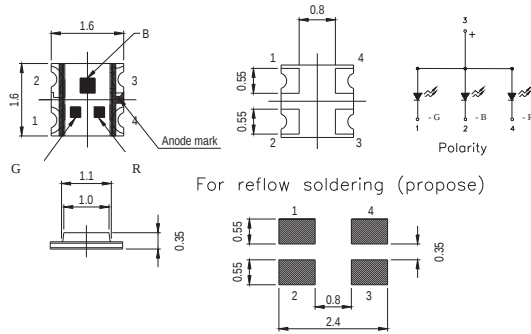

Product	Size (LXWXHmm)	Color	λ_d (nm)/ CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
19-237A/BHR6GHC-A01/2T	1.6x1.6x0.35	- Blue + - Brilliant Red + - Brilliant Green	BH:470 R6:624 GH:525	BH:28.5 / 50 R6:72 / 100 GH:112 / 180	-	BH:3.3 R6:2 GH:3.3	BH:3.9 R6:2.4 GH:3.9	20

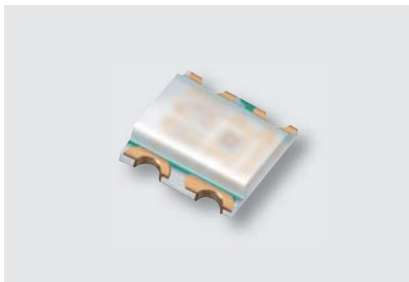


UNIT : mm

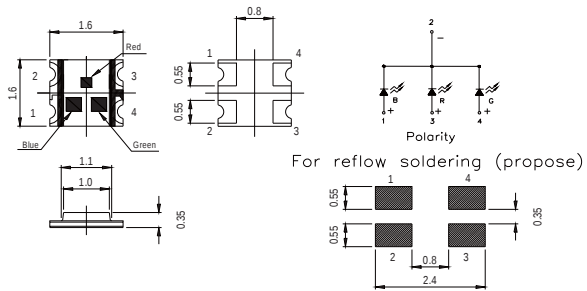

Product	Size (LXWXHmm)	Color	λ_d (nm)/ CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
19-237B/R6GHBHC-C01/2T	1.6x1.6x0.35	- Blue + - Brilliant Red + - Brilliant Green	BH:470 R6:624 GH:525	BH:11.5 / 18 R6:18 / 30 GH:28.5 / 60	BH:28.5 R6:57 GH:112	BH:2.6 / 3 R6:1.7 / 2 GH:2.6 / 3	BH:3.3 R6:2.2 GH:3.3	5




UNIT : mm

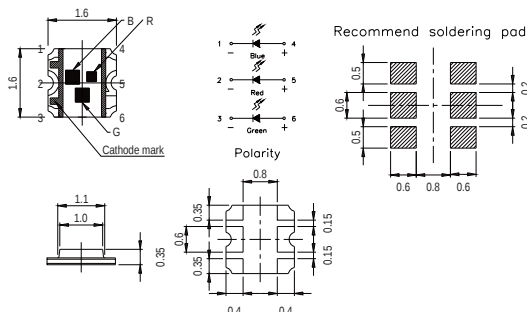


Product	Size (LXWXHmm)	Color	λ_d (nm)/ CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
19-337/R6GHBHC-A01/2T	1.6x1.6x0.35	- Blue + - Brilliant Red + - Brilliant Green	BH:470 R6:624 GH:525	BH:28.5 / 50 R6:72 / 100 GH:112 / 180	-	BH:3.3 R6:2.0 GH:3.3	BH:3.9 R6:2.4 GH:3.9	20


SMD LED ■ Surface Mount Chip LED (PCB) ■ Side View (0.2T~1.0T)

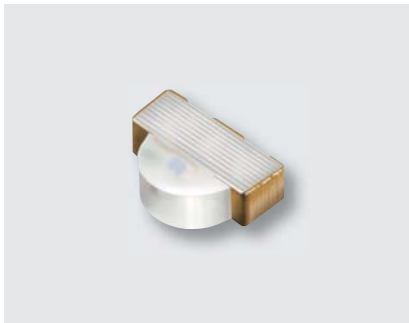


UNIT : mm

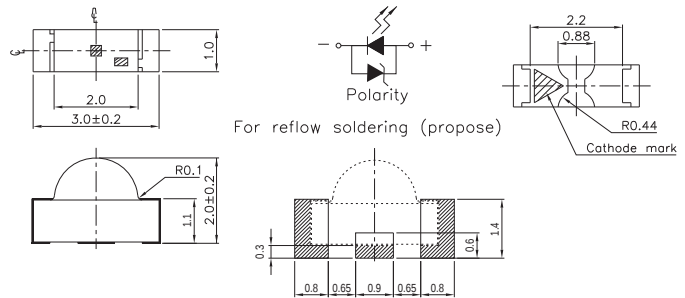

Product	Size (LXWXHmm)	Color	λ_d (nm)/CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
12-11/BHC-ZL1M2QY/2C	3.0x2.0x1.0	● Blue	470	11.5	28.5	2.7	3.2	5

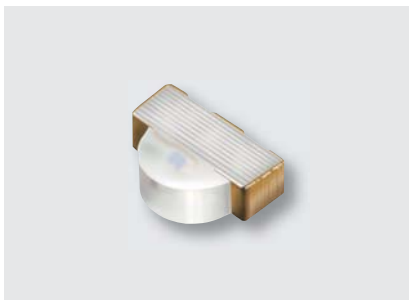


UNIT : mm

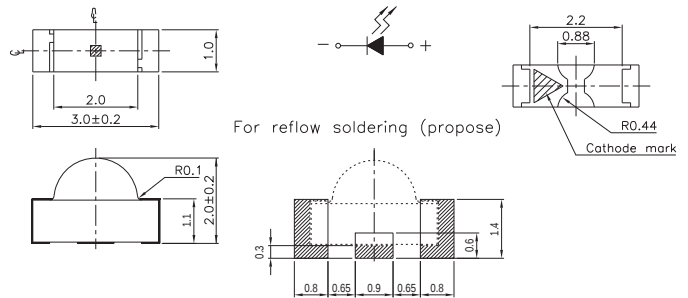

Product	Size (LXWXHmm)	Color	λ_d (nm)/CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
12-21/BHC-AN1P2/2C	3.0x2.0x1.0	● Blue	470	28.5	72	2.7 / 3.3	3.7	20
12-21/BHC-ZL1M2RY/2C	3.0x2.0x1.0	● Blue	470	11.5	28.5	2.5	3.1	5
12-21/GHC-YR2S2/2C	3.0x2.0x1.0	● Brilliant Green	525	140	285	3.5	4.3	20
12-21/R8C-AN1P2B/2D	3.0x2.0x1.0	● Deep Red	639	28.5	72	1.75	2.35	20
12-21/T3D-AQ2S2M/2C	3.0x2.0x1.0	○ Pure White	x=0.274 y=0.226	90	285	2.75	3.95	20



UNIT : mm

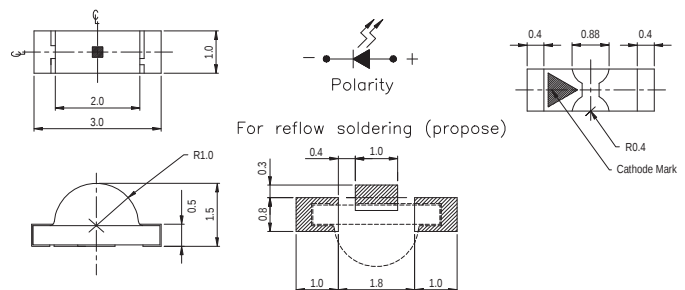


Product	Size (LXWXH mm)	Color	λ_d (nm)/CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
12-21C/BHC-AN1P2/2C	3.0x1.5x1.0	● Blue	470	28.5	72	2.7 / 3.3	3.7	20
12-21C/BHC-YL1M2HY/2C	3.0x1.5x1.0	● Blue	470	11.5	28.5	2.7	3.15	5
12-21C/T3D-CP1Q2B12Y/2C	3.0x1.5x1.0	○ Pure White	x=0.274 y=0.226	45	112	2.7	3.4	5
12-21C/W1D-AR1S2/2C	3.0x1.5x1.0	○ Pure White	x=0.274 y=0.226	112	285	3.3	3.7	20

SMD LED ■ Surface Mount Chip LED (PCB) ■ Side View (0.2T~1.0T)




UNIT : mm

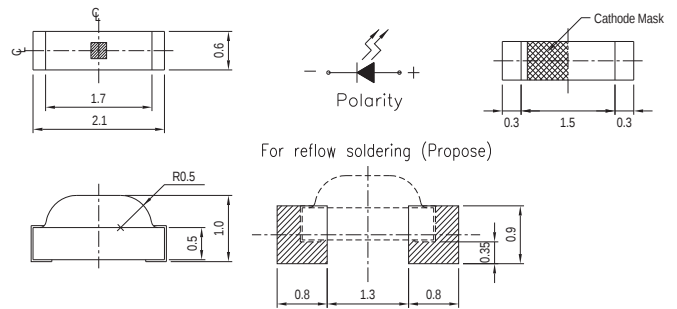

Product	Size (LXWXHmm)	Color	λ_d (nm)/CIE(x,y)	I_V Min./Typ. (mcd)	I_V Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
12-215/BHC-AN1P2/3C	2.1x1.0x0.6	● Blue	470	28.5	72	3.5	4	20
12-215/BHC-XL1M2HY/3C	2.1x1.0x0.6	● Blue	470	11.5	28.5	2.7	3.15	5
12-215/G6C-AL2M2B/3C	2.1x1.0x0.6	● Brilliant Yellow Green	573	14.5	28.5	1.75	2.35	20
12-215/G6C-BP1Q2L/3C	2.1x1.0x0.6	● Brilliant Yellow Green	573	45	112	1.7	2.3	20
12-215/R6C-AR1S1B/3C	2.1x1.0x0.6	● Brilliant Red	624	112	225	1.75	2.35	20
12-215/T1D-ANPHY/3C	2.1x1.0x0.6	○ Pure White	x=0.274 y=0.226	28.5	72	2.7	3.15	5
12-215/W1D-ANPHY/3C	2.1x1.0x0.6	○ Pure White	x=0.274 y=0.226	28.5	72	2.7	3.15	5
12-215/Y2C-BR1S1L/3C	2.1x1.0x0.6	● Brilliant Yellow	589	112	225	1.7	2.3	20
12-215/Y2C-CP1Q2B/3C	2.1x1.0x0.6	● Brilliant Yellow	589	45	112	1.75	2.35	20
12-215/Y2C-CQ1R1B/3C	2.1x1.0x0.6	● Brilliant Yellow	589	72	140	1.75	2.35	20



UNIT : mm

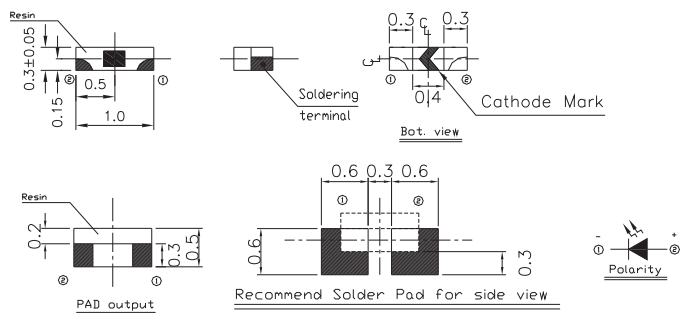


Product	Size (LXWXHmm)	Color	λ_d (nm)/CIE(x,y)	I_V Min./Typ. (mcd)	I_V Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
16-916/T1D-AP1Q2QY/3T	1.0x0.5x0.3	○ Pure White	x=0.274 y=0.226	45	112	2.7	3.2	5

SMD LED ■ Surface Mount Chip LED (PCB) ■ Side View (0.2T~1.0T)




UNIT : mm

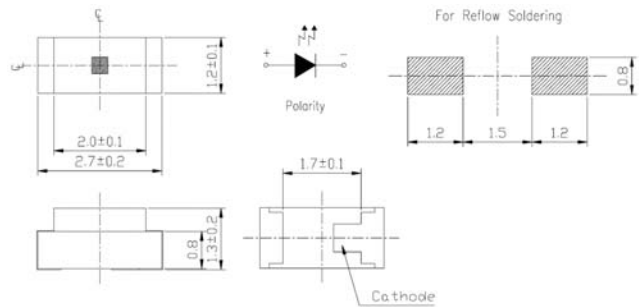

Product	Size (LXWXH mm)	Color	λ_d (nm)/CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
22-21/BHC-AN1P2/2C	2.7x1.3x1.2	Blue	470	28.5	72	3.8	4.5	20
22-21/GHC-YR1S2/2C	2.7x1.3x1.2	Brilliant Green	525	112	285	2.7 / 3.3	3.7	20




UNIT : mm

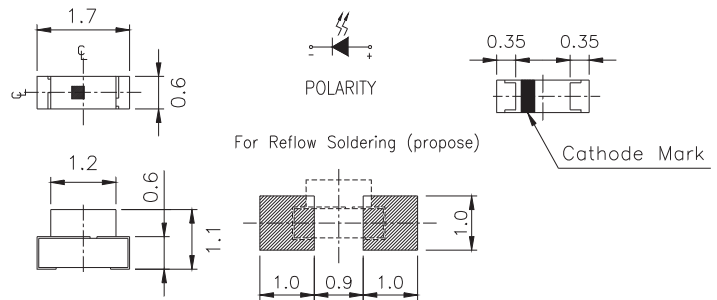


Product	Size (LXWXH mm)	Color	λ_d (nm)/CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
27-21/BHC-AN1P2/3C	1.7x1.1x0.6	Blue	470	28.5	72	2.7 / 3.3	3.7	20
27-21/BHC-AP1Q2/3C	1.7x1.1x0.6	Blue	470	45	112	2.7 / 3.3	3.7	20
27-21/GHC-YR1S2M/3C	1.7x1.1x0.6	Brilliant Green	525	112	285	2.75	3.95	20
27-21/R6C-AP1Q2B/3C	1.7x1.1x0.6	Brilliant Red	624	45	112	1.75	2.35	20
27-21/S2C-FP1Q1L/3C	1.7x1.1x0.6	Brilliant Orange	605	45	90	1.7	2.3	20
27-21/T1D-ANPHY/3C	1.7x1.1x0.6	Pure White	x=0.274 y=0.226	28.5	72	2.7	3.15	5
27-21/T1D-CQ1R2NW/3C	1.7x1.1x0.6	Pure White	x=0.274 y=0.226	72	180	2.7	3.7	15
27-21/T3D-AP2Q2HY/3C	1.7x1.1x0.6	Pure White	x=0.274 y=0.226	57	112	2.7	3.15	5
27-21/W1D-APQHY/3C	1.7x1.1x0.6	Pure White	x=0.274 y=0.226	45	112	2.7	3.15	5
27-21/Y2C-CPQB/3D	1.7x1.1x0.6	Brilliant Yellow	589	45	112	1.75	2.35	20

SMD LED ■ Surface Mount Chip LED (PCB) ■ Side View (0.2T~1.0T)

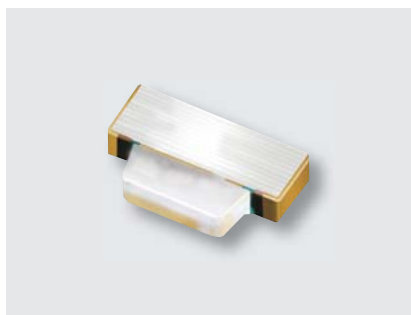

UNIT : mm



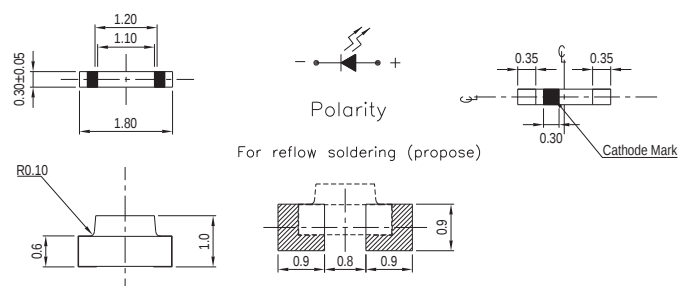


Product	Size (LXWXH mm)	Color	λ_d (nm)/CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
48-213/BHC-ZM2P1QY/3C	1.8x1.0x0.3	● Blue	470	22.5	57	2.7	3.2	5
48-213/R6C-AM1N2VY/3C	1.8x1.0x0.3	● Brilliant Red	624	18	45	1.7	2.2	5
48-213/T2D-AQ2R2QY/3C	1.8x1.0x0.3	○ Pure White	x=0.274 y=0.226	90	180	2.7	3.2	5
48-213/T3D-AP1Q2TY/3C	1.8x1.0x0.3	○ Pure White	x=0.274 y=0.226	45	112	2.6	3	5
48-213/T7D-AQ1R2QY/3C	1.8x1.0x0.3	○ Pure White	x=0.274 y=0.226	72	180	2.7	3.2	5

SMD LED ■ Surface Mount Chip LED (PCB) ■ Side View Bi-Color





UNIT : mm



Product	Size (LXWXHmm)	Color	λ_d (nm)/CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
12-22/BHR6C-A01/2C	3.0x2.0x1.0	● Blue + ● Brilliant Red	BH:470 R6:624	BH:18 / 28 R6:22.5 / 30	--	BH:2.7 R6:1.7	BH:3.1 R6:2.2	5
12-22/G6R8C-A30/2C	3.0x2.0x1.0	● Brilliant Yellow Green + ● Deep Red	G6:573 R8:639	G6:28.5 R8:28.5	G6:72 R8:72	G6:1.7 / 2 R8:1.7 / 2	G6:2.4 R8:2.4	20
12-22/R6GHC-A30/2C	3.0x2.0x1.0	● Brilliant Red + ● Brilliant Green	R6:624 GH:525	R6:72 GH:112	R6:180 GH:285	R6:1.7 / 2 GH:2.7 / 3.3	R6:2.4 GH:3.7	20
12-22/Y2G6C-A30/2C	3.0x2.0x1.0	● Brilliant Yellow + ● Brilliant Yellow Green	Y2:589 G6:573	Y2:45 G6:28.5	Y2:112 G6:72	Y2:1.7 / 2 G6:1.7 / 2	Y2:2.4 G6:2.4	20



UNIT : mm

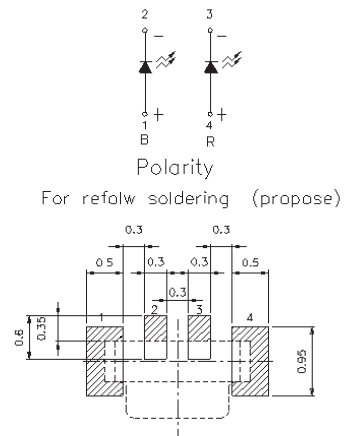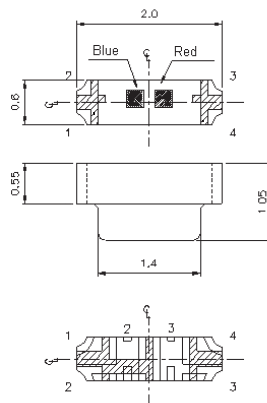


Product	Size (LXWXHmm)	Color	λ_d (nm)/CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
17-223/BHR7C-C30/3C	2.0x1.05x0.6	● Blue + ● Dark Red	BH:470 R7:631	BH:22.5 R7:14.5	BH:57 R7:36	BH:2.7 R7:1.55	BH:3.2 R7:2.15	5

SMD LED ■ Surface Mount Chip LED (PCB) ■ Side View Bi-Color



UNIT : mm

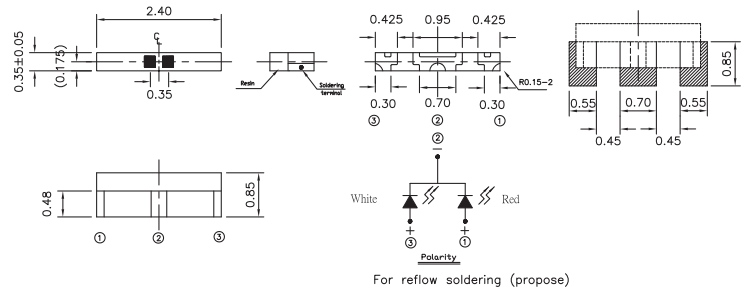


Product	Size (LXWXHmm)	Color	λ_d (nm)/ CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
48-22/R7T2D-C02/2C	2.4 x 0.85 x 0.35	● Dark Red + ○ Pure White	R7: 629	R7: 36 T2: 90	R7: 90 T2: 225	R7: 1.7 T2: 2.7	R7: 2.2 T2: 3.2	5

SMD LED ■ Surface Mount Chip LED (PCB) ■ Side View Full Color



UNIT : mm

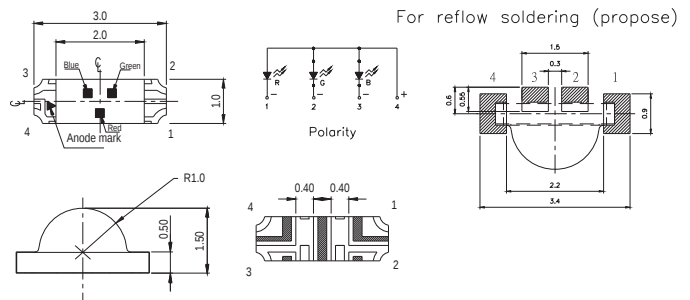


Product	Size (LXWXHmm)	Color	λ_d (nm)/ CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
12-23C/R6GHBHC-A01/2C	3.0x1.5x1.0	● Blue+ ● Brilliant Red + ● Brilliant Green	BH:470 R6:624 GH:525	BH:32 / 50 R6:63 / 90 GH:125 / 180	—	BH:2.7 / 3.3 R6:1.7 / 2 GH:2.7 / 3.3	BH:3.7 R6:2.4 GH:3.7	20
12-23C/S2GHBHC-A01/2C	3.0x1.5x1.0	● Brilliant Orange + ● Blue+ ● Brilliant Green	BH:470 S2:605 GH:525	BH:36 / 65 S2:72 / 140 GH:140 / 210	—	BH:3.3 S2:2 GH:3.3	BH:3.9 S2:2.4 GH:3.9	20

SMD LED ■ Surface Mount Chip LED (PCB) ■ Side View Full Color




UNIT : mm

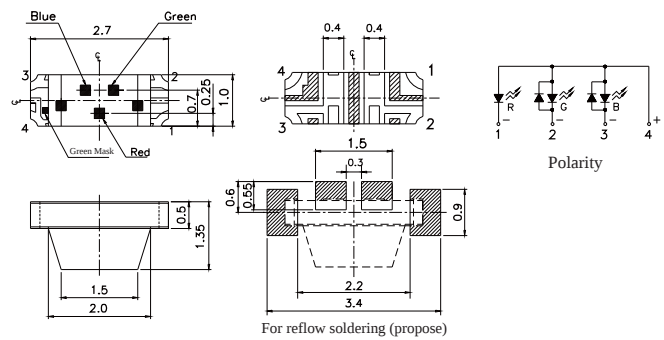

Product	Size (LXWXHmm)	Color	λ_d (nm)/ CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
22-23/R6GHBHC-A01/2C	2.7x1.35x1.0	- Blue+ - Brilliant Red + - Brilliant Green	BH:470 R6:624 GH:525	BH:28.5 / 45 R6:45 / 72 GH:112 / 180	—	BH:2.7 / 3.3 R6:1.7 / 2 GH:2.7 / 3.3	BH:3.7 R6:2.4 GH:3.7	20



UNIT : mm

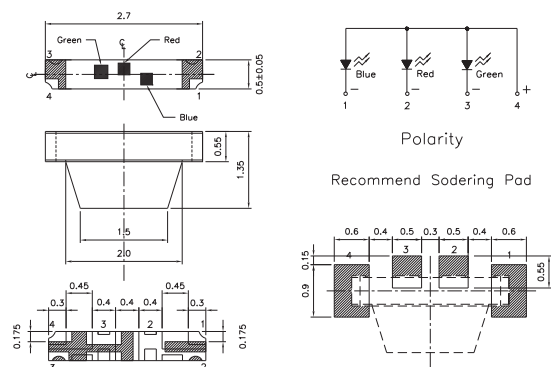


Product	Size (LXWXHmm)	Color	λ_d (nm)/ CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
22-23C/R6GHBHW-C01/2C	2.7x1.35x0.5	- Blue+ - Brilliant Red + - Brilliant Green	BH:470 R6:624 GH:525	BH:10 R6:14.5 GH:35	BH:24.5 R6:36 GH:110	BH:2.7 / 2.9 R6:1.7 / 1.85 GH:2.7 / 2.9	BH:3.1 R6:2 GH:3.2	5


SMD LED | Surface Mount Chip LED (PCB) | Reverse Mount




UNIT : mm

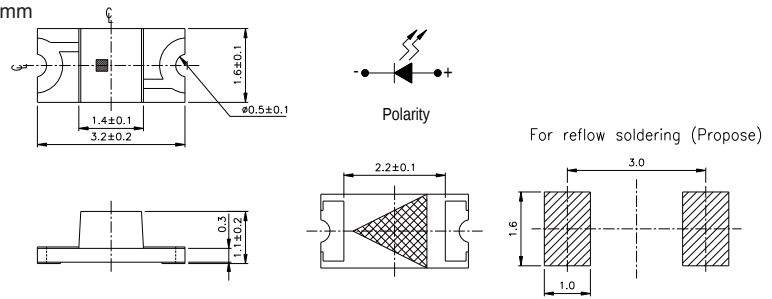


Product	Size (LXWXHmm)	Color	λ_d (nm)/CIE(x,y)	I_V Min./Typ. (mcd)	I_V Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
23-21/G6C-AL2N1/2T	3.2x1.6x1.1	Brilliant Yellow Green	573	14.5	36	1.7 / 2	2.4	20
23-21/GHC-YR2T1/2A	3.2x1.6x1.1	Brilliant Green	525	140	360	3.5	3.9	20
23-21/R6C-AM1N2AY/2A	3.2x1.6x1.1	Brilliant Red	624	18	45	1.55	2.15	5
23-21/R8C-AN2Q1B/2T	3.2x1.6x1.1	Deep Red	639	36	90	1.75	2.35	20

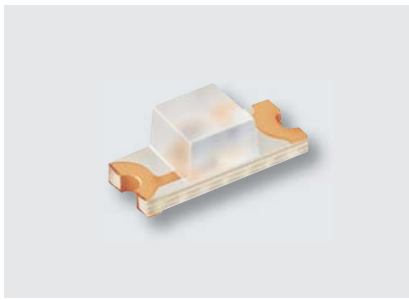


UNIT : mm

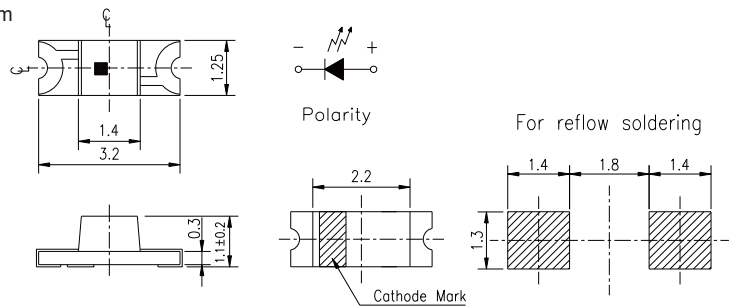

Product	Size (LXWXHmm)	Color	λ_d (nm)/CIE(x,y)	I_V Min./Typ. (mcd)	I_V Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
23-21B/BHC-AN1P2/2A	3.2x1.25x1.1	Blue	470	28.5	72	3.5	4	20
23-21B/BHC-ZL1M1Y/2A	3.2x1.25x1.1	Blue	470	11.5	22.5	2.7 / 3.3	3.7	5
23-21B/G6C-AM2P1/2A	3.2x1.25x1.1	Brilliant Yellow Green	573	22.5	57	1.7 / 2	2.4	20
23-21B/S2C-AN1P2/2A	3.2x1.25x1.1	Brilliant Orange	605	28.5	72	1.7 / 2.0	2.4	20
23-21B/T1D-ANQHY/2A	3.2x1.25x1.1	Pure White	x=0.274 y=0.226	28.5	112	2.7	3.15	5
23-21B/T1D-CP2Q2TY/2A	3.2x1.25x1.1	Pure White	x=0.274 y=0.226	57	112	2.6	3	5
23-21B/W1D-ANQHY/2A	3.2x1.25x1.1	Pure White	x=0.274 y=0.226	28.5	112	2.7	3.15	5

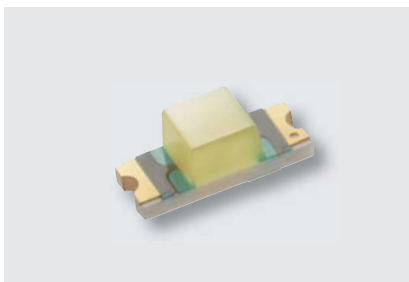


UNIT : mm

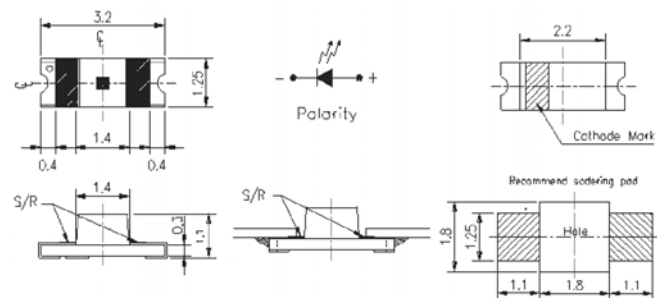


Product	Size (LXWXHmm)	Color	λ_d (nm)/CIE(x,y)	I_V Min./Typ. (mcd)	I_V Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
23-21C/T1D-CP2Q2TY/2A	3.2x1.25x1.1	White	x=0.274 y=0.226	57	112	Min: 2.6	3	5

SMD LED | Surface Mount Chip LED (PCB) | Reverse Mount

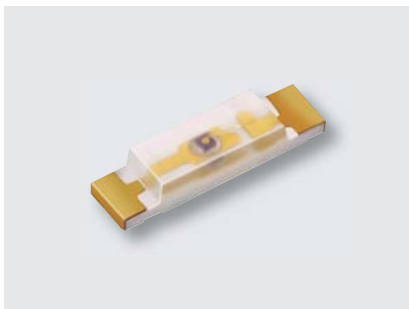


UNIT : mm

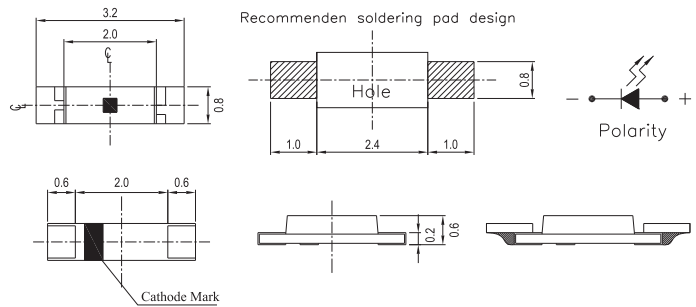

Product	Size (LXWXHmm)	Color	λ_d (nm)/CIE(x,y)	I_V Min./Typ. (mcd)	I_V Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
23-215A/BHC-DN2P2E/5A	3.2x0.8x0.6	● Blue	470	36	72	2.75	3.65	20




UNIT : mm

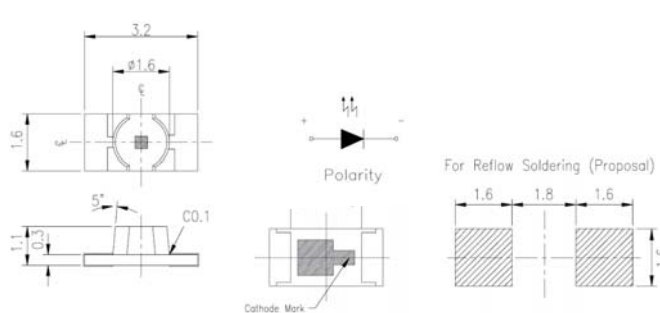

Product	Size (LXWXHmm)	Color	λ_d (nm)/CIE(x,y)	I_V Min./Typ. (mcd)	I_V Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
24-21/BHC-AN1P2/2A	3.2x1.6x1.1	● Blue	470	28.5	72	3.5	4	20
24-21/GHC-YR2T1/2A	3.2x1.6x1.1	● Brilliant Green	525	140	360	3.5	4	20



UNIT : mm

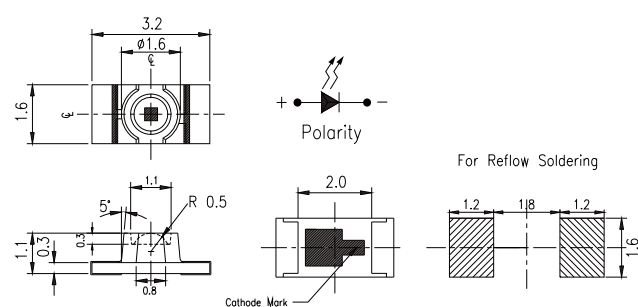


Product	Size (LXWXHmm)	Color	λ_d (nm)/CIE(x,y)	I_V Min./Typ. (mcd)	I_V Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
25-21/BHC-APR/2T	3.2x1.6x1.1	● Blue	470	45	180	2.7 / 3.3	3.7	20
25-21/GHC-YSU/2A	3.2x1.6x1.1	● Brilliant Green	525	180	715	3.5	4.3	20
25-21/T1D-ANQHY/2A	3.2x1.6x1.1	○ Pure White	x=0.274 y=0.226	28.5	112	2.7	3.15	5
25-21/W1D-APQHY/2A	3.2x1.6x1.1	○ Pure White	x=0.274 y=0.226	45	112	2.7	3.15	5

SMD LED | Surface Mount Chip LED (PCB) | Reverse Mount Bi-color




UNIT : mm

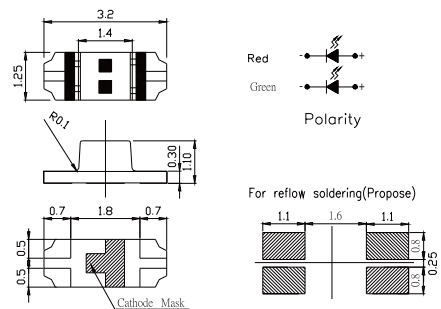

Product	Size (LXWXHmm)	Color	λ_d (nm)/ CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
23-22B/R7G6C-A30/2T	3.2x1.25x1.1	- Dark Red + - Brilliant Yellow Green	R7:631 G6:573	R7:18 G6:14.5	R7:72 G6:45	R7:1.7 / 2 G6:1.7 / 2	R7:2.4 G6:2.4	20
23-22B/S2BHC-C30/2A	3.2x1.25x1.1	- Brilliant Orange + - Blue	S2:605 BH:470	S2:11.5 BH:11.5	S2:28.5 BH:28.5	S2:1.55 / 1.85 BH:2.5 / 3.1	S2:2.25 BH:3.5	5




UNIT : mm

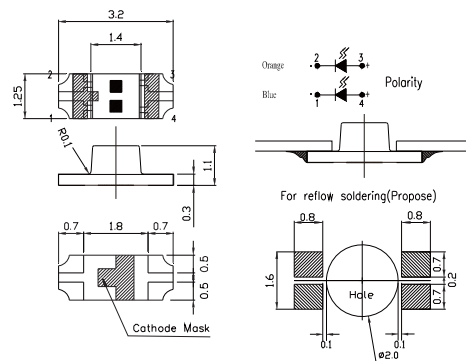


Product	Size (LXWXHmm)	Color	λ_d (nm)/ CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
23-22C/S2BHC-B30/2A	3.2x1.25x1.1	- Brilliant Orange + - Blue	S2:605 BH:470	S2:22.5 BH:22.5	S2:57 BH:57	S2:1.7 / 2 BH:2.7 / 3.3	S2:2.4 BH:3.7	10

SMD LED ■ Surface Mount Chip LED (PCB) ■ Reverse Mount Full color

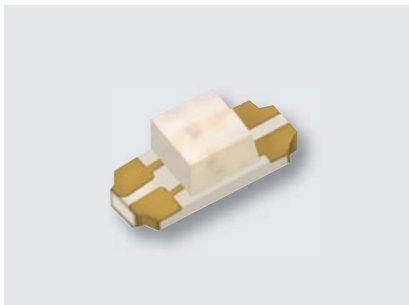

UNIT : mm

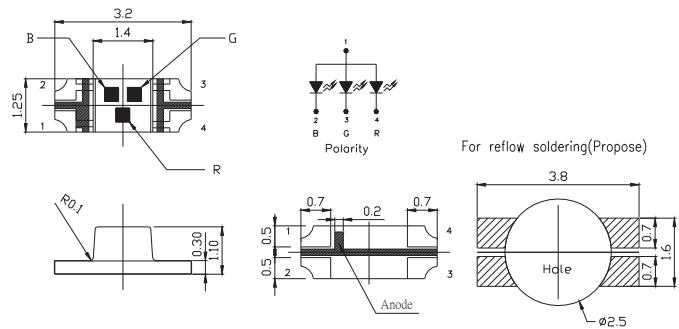


Product	Size (LXWXHmm)	Color	λ_d (nm)/ CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
23-23B/R6GHBHC-A01/2A	3.2x1.25x1.1	● Blue + ● Brilliant Red + ● Brilliant Green	BH:470 R6:624 GH:525	BH:45 / 65 R6:72 / 100 GH:140 / 200	--	BH:2.7 / 3.3 R6:1.7 / 2 GH:2.7 / 3.3	BH:3.7 R6:2.4 GH:3.7	20

SMD LED ■ Surface Mount PLCC LEDs (Reflector) ■ Top View LED




UNIT : mm

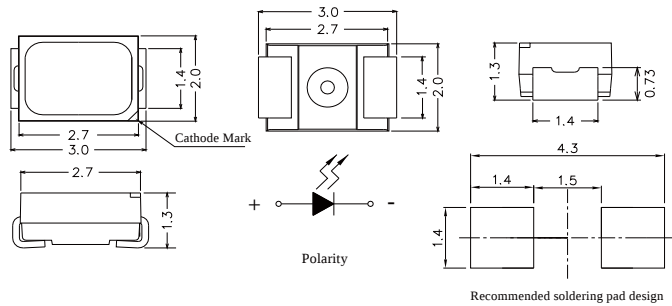

Product	Size (LXWXHmm)	Color	I_V (mcd)	CIE	V_F	Viewing Angle (°)
45-21UMC/3235A54/TR8	3.0x2.0x1.3	○ White	1700~1900	$x=0.2755\sim0.3110$ $y=0.2619\sim0.3150$	3.05~3.35	120




UNIT : mm

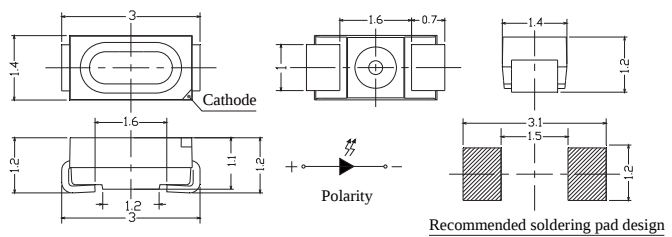

Product	Size (LXWXHmm)	Color	I_V (mcd)	CIE	V_F	Viewing Angle (°)
50-215BUMC/3437425/TR8	3.0x1.4x1.2	○ White	1800~2000	$x=0.2818\sim0.3035$ $y=0.2619\sim0.2950$	3.05~3.45	120



UNIT : mm

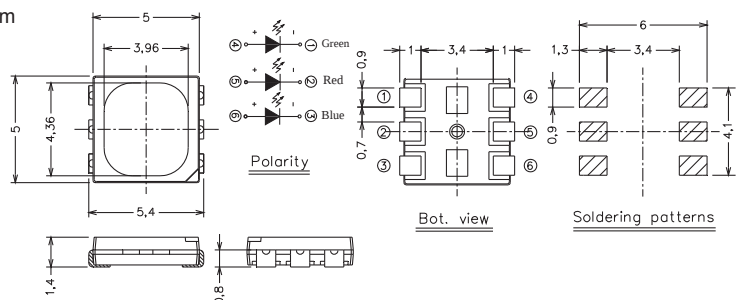


Product	Size (LXWXHmm)	Color	λ_d (nm)/CIE(x,y)	I_V Min./Typ. (mcd)	I_V Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
61-238/LK2C-B50638F6GB2/ET	5.0x5.0x1.4	○ White	$x=0.3031\sim0.4614$ $y=0.3108\sim0.4333$	3200	6600	2.7	3.7	20
61-238/RSGBB7C-B02/ET	5.0x5.0x1.4	● Brilliant Red ● Brilliant Green ● Blue	RS: Brilliant Red GB: Brilliant Green B7: Blue	RS: 450 GB: 715 B7: 225	RS: 900 GB: 1420 B7: 450	RS: 1.75 GB: 2.75 B7: 2.75	RS: 2.35 GB: 3.65 B7: 3.65	20
61-238UMC/S3085/TR8/LT	5.0x5.0x1.4	○ White	$x=0.290\sim0.311$ $y=0.283\sim0.333$	4000	6000	2.7	3.6	20


SMD LED ■ Surface Mount PLCC LEDs (Reflector) ■ Top View LED




UNIT : mm

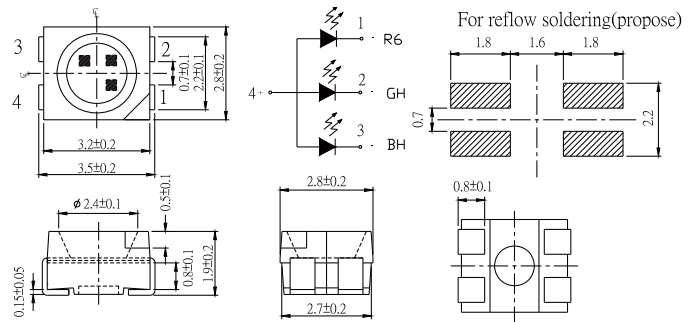

Product	Size (LXWXHmm)	Color	λ_d (nm)/CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
67-23/R6GHBHC-B05/2T	3.5x2.8x1.9	R6: ● Brilliant Red GH: ● Brilliant Green BH: ● Blue	R6: 621~631 GH: 520~530 BH: 465~475	R6: 112 GH: 180 BH: 72	R6: 285 GH: 715 BH: 180	R6: 2.0 GH: 3.4 BH: 3.4	R6: 2.4 GH: 3.95 BH: 3.95	20
67-23/T2C-EY2Z0/2T	3.5x2.8x1.9	○ White	x=0.264~0.33 y=0.248~0.36	3600	7200	2.7	3.5	20
67-23SDRSYGUBC/TR8	3.5x2.8x1.8	SDR: ● Deep Red SYG: ● Brilliant Yellow Green UB: ● Blue	SDR: 639 SYG: 573 UB: 470	SDR: 63/112 SYG: 13 /20 UB: 11/ 18	—	SDR: 2.0 SYG: 2.0 UB: 3.5	SDR: 2.4 SYG: 2.4 UB: 4.0	20

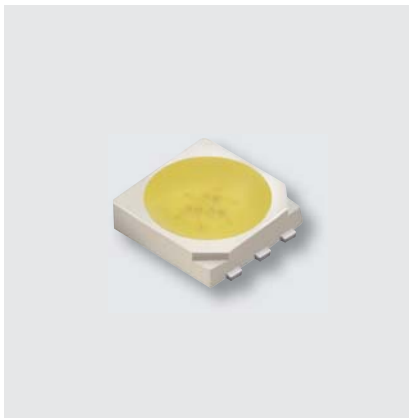

UNIT : mm

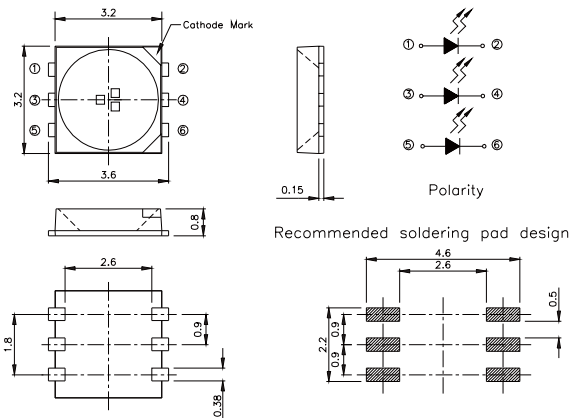


Product	Size (LXWXHmm)	Color	λ_d (nm)/CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
67-235UWC/TR8	3.2x3.2x0.8	○ White	x=0.264~0.361 y=0.248~0.385	2000	2500	3.5	4	20

SMD LED | Surface Mount PLCC LEDs (Reflector) | Top View Bi-Color




UNIT : mm

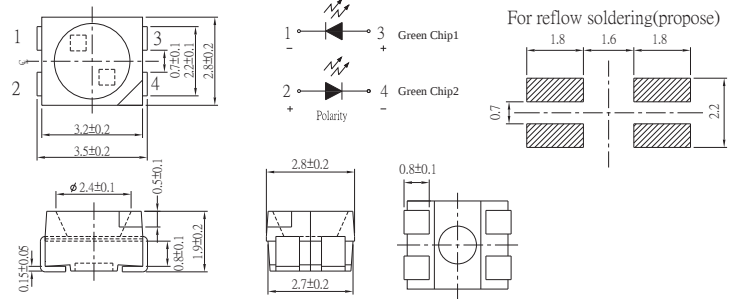

Product	Size (LXWXH mm)	Color	λ_d (nm)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)
67-22/G3G3C-B45/2T	3.5x2.8x1.9	G3: ○ Pale Green G3: ○ Pale Green	563.5-571.5	4.0 / 10 (10mA)	36 (10mA)	1.7 / 2.0 (10mA)	2.4 (10mA)
67-22/R6BHC-B07/2T	3.5x2.8x1.9	R6: ● Brilliant Red BH: ● Blue	R6: 621-63 BH: 466.5-471.5	R6: 90 BH: 90	R6: 225 BH: 225	R6: 1.75 BH: 2.9	R6: 2.35 BH: 3.7
67-22/R6G6C-B09/2T	3.5x2.8x1.9	R6: ● Brilliant Red G6: ● Brilliant Yellow Green	R6: 621-627 G6: 570-574	R6: 57 G6: 36	R6: 140 G6: 90	R6: 1.75 G6: 1.75	R6: 2.35 G6: 2.35
67-22/R6Y2C-B31/2T	3.5x2.8x1.9	R6: ● Brilliant Red Y2: ● Brilliant Yellow	R6: 621-631 Y2: 586-594	72	285	1.75	2.35
67-22SURSYGC/S530-A2/TR8	3.5x2.8x1.9	SUR: ● Deep Red SYG: ● Brilliant Yellow Green	SUR: 624 SYG: 573	SUR: 16 / 24 SYG: 29 / 59	--	SUR: 1.7 / 2.0 SYG: 1.7 / 2.0	SUR: 2.4 SYG: 2.4
67-22UYSYGC/S530-A5/TR8	3.5x2.8x1.9	UY: ● Brilliant Yellow SYG: ● Brilliant Yellow Green	UY: 589 SYG: 573	UY: 80 / 120 SYG: 50 / 80	--	UY: 2.0 SYG: 2.0	UY: 2.4 SYG: 2.4



UNIT : mm

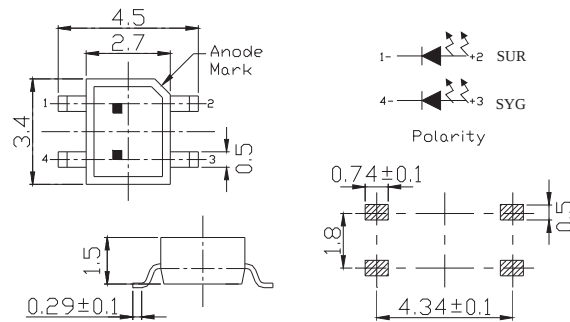


Product	Size (LXWXH mm)	Color	λ_d (nm)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
93-22SURSYGC/S530-A3/TR8	3.4x2.7x1.5	SUR: ● Brilliant Red SYG: ● Brilliant Yellow Green	SUR: 624 SYG: 573	SUR: 17 SYG: 11	SUR: 41 SYG: 17	SUR: 2.0 SYG: 2.0	SUR: 2.4 SYG: 2.4	SUR: 20 SYG: 20

SMD LED | Surface Mount PLCC LEDs (Reflector) | Top View PLCC2

PRELIMINARY




UNIT : mm

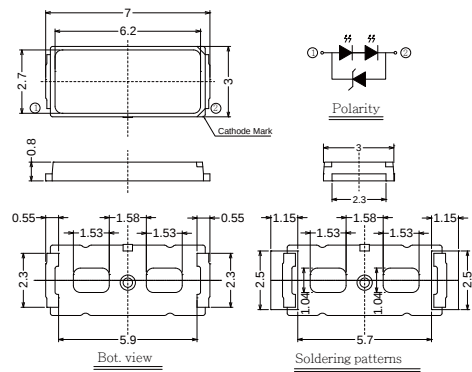


Product	Size (LXWXHmm)	Color	I _v (Lm)	CIE (x,y)	V _F (V)	Viewing Angle (°)
ELT-7030ZUMC-xxxxxxxxxx-TR8-T	7.0x3.0x0.8	○ White	70	x=0.262 , y=0.235	2.9-3.6	120

• MP Schedule : 12' March.

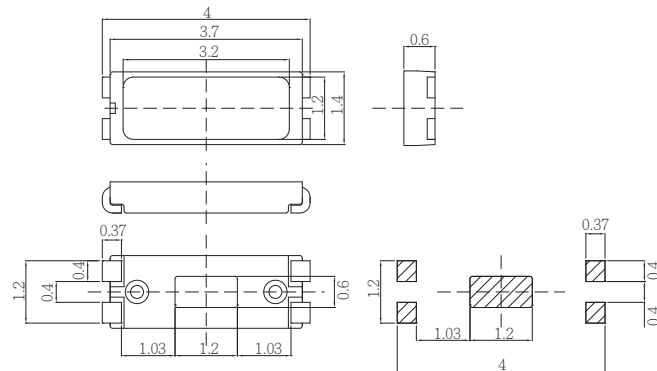


- Binning by customer spec requirement.

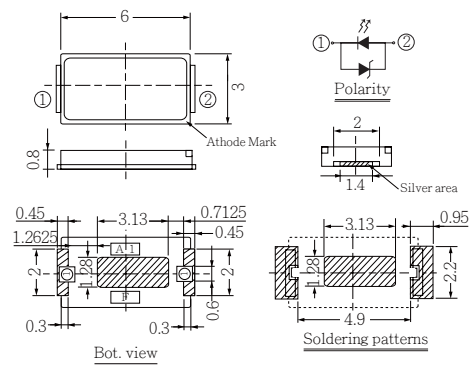

Product	Size (LXWXHmm)	Color	I _v (Lm)	CIE (x,y)	V _F (V)	Viewing Angle (°)
62-118AUNC/T3438M4N7BF/TR8-T	6.0x3.0x0.8	○ White	34-38	x=0.2503-0.2799 y=0.2058-0.2492	3.0-3.6	120


SMD LED ■ Surface Mount PLCC LEDs (Reflector) ■ Top View PLCC2

UNIT : mm

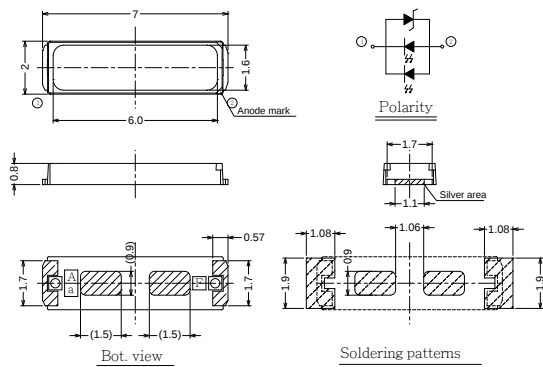

Product	Size (LXWXHmm)	Color	I _v (Lm)	CIE (x,y)	V _F (V)	Viewing Angle (°)
62-129AUMR4C/T3236M6N9PBF/TR8-T	7.0x2.0x0.8	○White	32-36	x=0.2584-0.2922 y=0.2227-0.2661	3.0-3.6	120

UNIT : mm

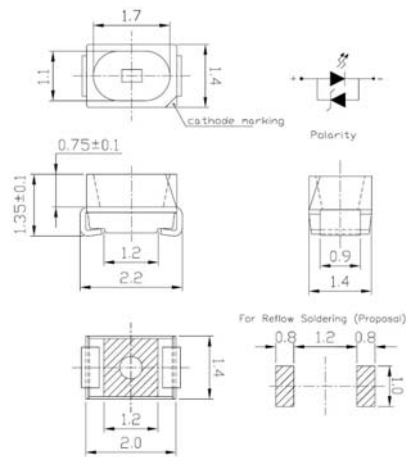


Product	Size (LXWXHmm)	Color	λ_d (nm)/CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
65-11/BHC-AR1S2B2/2T	2.2x1.4x1.35	● Blue	464.5~476.5	112	285	2.9	3.6	20
65-11/T2C-FV1W2E/2T	2.2x1.4x1.35	○ Pure White	x=0.2870~0.3110 y=0.2955~0.3390	715	1800	2.75	3.65	20
65-11UTC/S933/TR8	2.2x1.4x1.35	○ Pure White	x=0.3300~0.3500 y=0.3180~0.3600	1000	1800	2.7	3.5	20

SMD LED ■ Surface Mount PLCC LEDs (Reflector) ■ Top View PLCC2




UNIT : mm

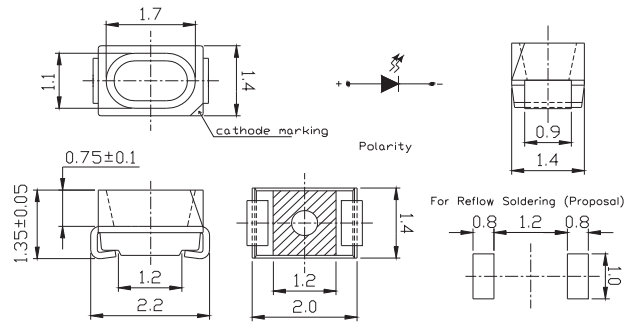

Product	Size (LXWXHmm)	Color	λ_d (nm)/CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
65-21/G6C-AN2Q1/3T	2.2x1.4x1.35	● Brilliant Yellow Green	569.5-577.5	36	90	--	2.35	20
65-21/Y2C-CJ2L2X/3T	2.2x1.4x1.35	● Brilliant Yellow	586-592	5.8 (2mA)	18 (2mA)	2	2.4	2
65-21/Y2SC-AR1S2B/2T	2.2x1.4x1.35	● Brilliant Yellow	585.5-594.5	112	285	1.75	2.35	20
65-21/Y2SC-FR2S1B/2T	2.2x1.4x1.35	● Brilliant Yellow	586-594	140	225	1.75	2.35	20



UNIT : mm

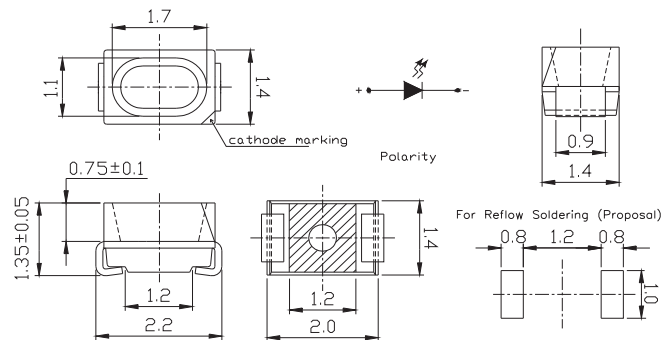


Product	Size (LXWXHmm)	Color	I_v (mcd)	λ_d (nm)	V_F (V)	Viewing Angle (°)
65-21-G6C-Y2P2R1B7E-2T8-AM	2.2x1.4x1.35	● Green	56~140	569.5~575.5	1.7~2.4	120
65-21-B1C-A1H2K1A1C-2T8-AM	2.2x1.4x1.35	● Blue	3.55~9	462~468	2.9~4.1	120
65-21-B3T-A0S1T1A7E-2T8-AM	2.2x1.4x1.35	○ White	180~355	x=0.28 y=0.27	2.7~3.8	120
65-21-S2SC-B2S1T1B7E-2T8-AM	2.2x1.4x1.35	● Orange	180~355	603~609	1.7~2.4	120
65-21-R7C-A6Q2S1B0E-2T8-AM	2.2x1.4x1.35	● Red	90~224	627~639	1.75~2.35	120

SMD LED ■ Surface Mount PLCC LEDs (Reflector) ■ Top View PLCC2




UNIT : mm

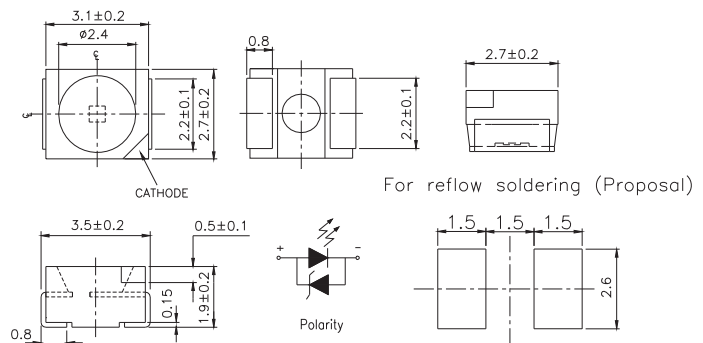

Product	Size (LXWXHmm)	Color	λ_d (nm)/CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
67-11/BHC-FQ2S1F/2T	3.5 x 2.7 x 1.9	Blue	464~472	90	225	2.7	3.5	20
67-11/GHC-AT2V1/2T	3.5 x 2.7 x 1.9	Brilliant Green	520~535	180	450	2.7	3.7	20
67-11/W1C-ES1T2N/2T	3.5 x 2.7 x 1.9	Warm White	x=0.264~0.330 y=0.248~0.360	180	450	2.7	3.7	20
67-11/W1C-FV1W2F/2T	3.5 x 2.7 x 1.9	White	x=0.283~0.330 y=0.276~0.360	715	1800	2.7	3.5	20



UNIT : mm

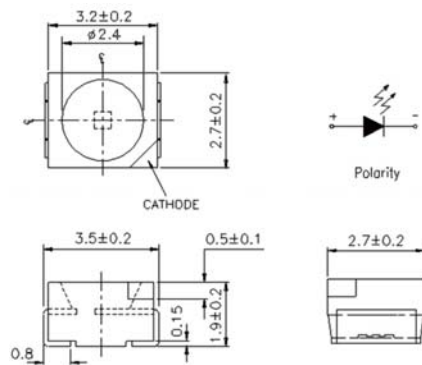


Product	Size (LXWXHmm)	Color	I_v (mcd)	λ_d (nm)	V_F (V)	Viewing Angle (°)
67-21-GHC-Z1T2U2A6C-2T8-AM	3.5x2.7x1.9	Green	374~575	523~531	2.6~3.8	120
67-21-B1C-R3K1M1C6C-2T8-AM	3.5x2.7x1.9	Blue	7.1~22.4	461~467	2.9~4.4	120
67-21-B3T-Q8R1S2M0E-2T8-AM	3.5x2.7x1.9	White	112~280	x=0.315~0.335 y=0.290~0.353	2.75~3.95	120
67-21-S2C-B2K2L2B7A-2T8-AM	3.5x2.7x1.9	Sunset Orange	9~18	603~609	1.7~2.4	120
67-21-R7C-F3K1L1B6A-2T8-AM	3.5x2.7x1.9	Red	7.1~14	625~638	1.7~2.4	120

SMD LED ■ Surface Mount PLCC LEDs (Reflector) ■ Top View PLCC2



UNIT : mm

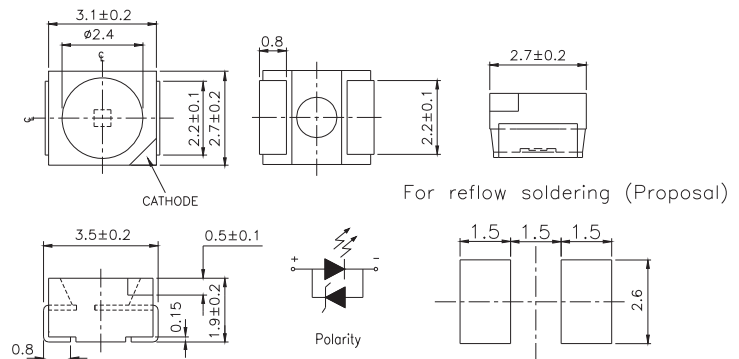


Product	Size (LXWXHmm)	Color	λ_d (nm)/CIE(x,y)	I_V Min./Typ. (mcd)	I_V Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
67-21/B3C-BN1Q2N/2T	3.5x2.7x1.9	Blue	464.5~473.5	28.5	112	2.7	3.7	20
67-21/B7C-AS2U1N/2T	3.5x2.7x1.9	Blue	464.5~476.5	225	565	2.7	3.7	20
67-21/BHC-FP1Q2F/2T	3.5x2.7x1.9	Blue	464~472	45	112	2.7	3.5	20
67-21/G4C-BQ1T2N/2T	3.5x2.7x1.9	Brilliant Green	523.5~535.5	72	450	2.7	3.7	20
67-21/G6C-FN2P2B/2T	3.5x2.7x1.9	Brilliant Yellow Green	569.5~577.5	45	112	1.75	2.35	20
67-21/GBC-YV2W2N/2T	3.5x2.7x1.9	Brilliant Green	520~535	900	1800	2.7	3.7	20
67-21/GHC-AS2U1B17Z/2T	3.5x2.7x1.9	Brilliant Green	517.5~535.5	225	565	2.5	3.5	10
67-21/GHC-BV1/2T	3.5x2.7x1.9	Brilliant Green	523.5~533.5	715	900	2.7	4.3	20
67-21/R6C-AP2R1B/2T	3.5x2.7x1.9	Brilliant Red	617.5~633.5	57	140	1.75	2.35	20
67-21/R6C-FN2Q1BZ/2T	3.5x2.7x1.9	Brilliant Red	621~631	36	90	1.75	2.35	10
67-21/R6C-FR2T1B/2T	3.5x2.7x1.9	Brilliant Red	621~631	140	360	1.75	2.35	20
67-21/R6C-FS1U1B/2T	3.5x2.7x1.9	Brilliant Red	620.5~631	180	565	1.75 / 2.0	2.35	20
67-21/RSC-FT2V1B/2T	3.5x2.7x1.9	Brilliant Red	621~631	360	900	1.75	2.35	20
67-21/RSC-T1V1/2T	3.5x2.7x1.9	Brilliant Red	624	285	900	1.7 / 2.0	2.4	20
67-21/S2C-FQ2R2B/2T	3.5x2.7x1.9	Brilliant Orange	603~609	90	180	1.75 / 2.0	2.35	20
67-21/S3C-AS1T1/2T	3.5x2.7x1.9	Reddish Orange	605.5~621.5	180	360	2	2.4	20
67-21/T2C-YV2W2B22/2A0	3.5x2.7x1.9	White	$x=0.3070\sim0.3300$ $y=0.3045\sim0.3390$	900	1800	3	3.6	20
67-21/T2C-ZV1W2E/2T	3.5x2.7x1.9	White	$x=0.2569\sim0.2960$ $y=0.2283\sim0.2950$	715	1800	2.75	3.65	20
67-21/T3C-EU1V2M/2A0	3.5x2.7x1.9	White	$x=0.2640\sim0.3300$ $y=0.2480\sim0.3600$	450	1120	2.75	3.95	20
67-21/Y2C-AP1Q1B/2T	3.5x2.7x1.9	Brilliant Yellow	585.5~594.5	45	90	1.75	2.35	20
67-21/Y2C-AS1T1/2T	3.5x2.7x1.9	Brilliant Yellow	585.5~594.5	180	360	2	2.4	20
67-21/Y2C-BR2T1B/2T	3.5x2.7x1.9	Brilliant Yellow	588.5~594.5	140	360	1.75	2.35	20
67-21/YSC-FU1U2B/2T	3.5x2.7x1.9	Brilliant Yellow	586~594	495	715	1.75	2.35	20
67-21/YSC-FU1V2B/2T	3.5x2.7x1.9	Brilliant Yellow	586~594	450	1120	1.75	2.35	20
67-21SUBC/S400-X9/TR8	3.5x2.7x1.9	Blue	470	32	135	3.5	4.3	20
67-21SURC/S530-A7/TR8	3.5x2.7x1.9	Hyper Red	624	23	251	2	2.4	20
67-21UBC/C430/TR8	3.5x2.7x1.9	Blue	466	35/55	NA	3.8	4.5	20
67-21UYC/S530-A6/TR8	3.5x2.7x1.9	Brilliant Yellow	589	40	154	1.7 / 2.0	2.4	20

SMD LED ■ Surface Mount PLCC LEDs (Reflector) ■ Top View PLCC3




UNIT : mm

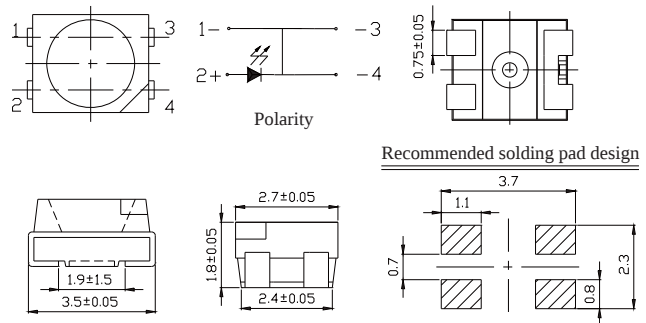

Product	Size (LXWXHmm)	Color	λ_d (nm)/ CIE(x,y)	I_v Min./ Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
67-31A/B7C-AT1U2MZ3/2T	3.5x2.7x1.8	● Blue	464.5~476.5	285	715	2.75	3.95	30
67-31A/GHC-YV1W2EZ3/2T	3.5x2.7x1.8	● Green	520~535	715	1800	2.75	3.65	30
67-31A/SAC-AW1X2B9Z5/2T	3.5x2.7x1.8	● Reddish Orange	605.5~625.5	1120	2850	2.15	2.75	50



UNIT : mm



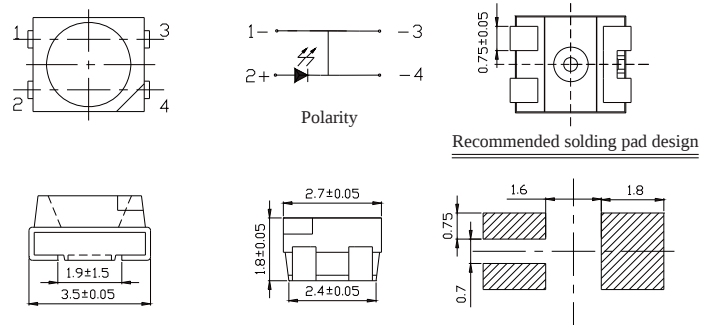


Product	Size (LXWXH mm)	Color	λ_d (nm)/ CIE(x,y)	I_v Min./ Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
67-31E/RSC-AV1W2B9Z5/2T	3.5x2.7x1.8	● Brilliant Red	617.5~633.5	715	1800	2.15	2.75	50



SMD LED ■ Surface Mount PLCC LEDs (Reflector) ■ Top View PLCC3



UNIT : mm



Recommended soldering pad design




Product	Size (LXWXHmm)	Color	I_v (mcd)	λ_d (nm)/CIE(x,y)	V_f (V)	Viewing Angle (°)
67-31E-Y9NC-E9V1AAC1G-2T8-AM	3.5x2.7x1.8	● Yellow	710~1400	586~595	1.7~2.6	120
67-31E-GPSC-U8P2R1B7G-2T8-AM	3.5x2.7x1.8	● Green	56~140	559~568	1.7~2.4	120
67-31EZ-BLT-2AV2ABC2F-2T8-AM	3.5x2.7x1.8	○ White	900~1800	x=0.315~0.335 y=0.300~0.360	2.7~3.9	120
67-31E-S3SC-M1U2V2C1G-2T8-AM	3.5x2.7x1.8	● Orange	560~1120	609.5~621.5	1.7~2.6	120

SMD LED ■ Surface Mount PLCC LEDs (Reflector) ■ Top View PLCC4



UNIT : mm

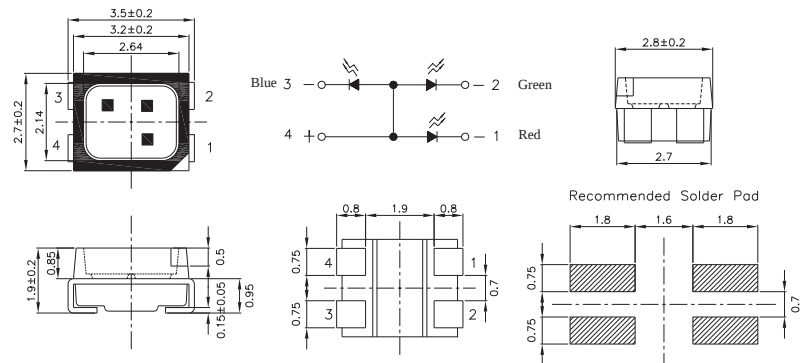


Product	Size (LXWXH mm)	Color	λ_d (nm)/ CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
67-03/BHGHR6W-B11/2T	3.5x2.7x1.9	RS: ● Brilliant Red GH: ● Brilliant Green BH: ● Blue	R6: 632 GH: 518 BH: 468	R6: 210 GH: 575 BH: 210	R6: 300 GH: 825 BH: 300	R6: 1.75 GH: 2.9 BH: 2.9	R6: 2.35 GH: 3.5 BH: 3.5	20
67-03/RSGHBHC-B06/1T	3.5x2.7x1.9	RS: ● Brilliant Red GH: ● Brilliant Green BH: ● Blue	RS: 50 GH: 30 BH: 30	RS: 450 GH: 900 BH: 226	RS: 715 GH: 1420 BH: 450	RS: 2.0 GH: 3.5 BH: 3.5	RS: 2.4 GH: 4.0 BH: 4.0	20

SMD LED ■ Surface Mount PLCC LEDs (Reflector) ■ Side View LED




UNIT : mm

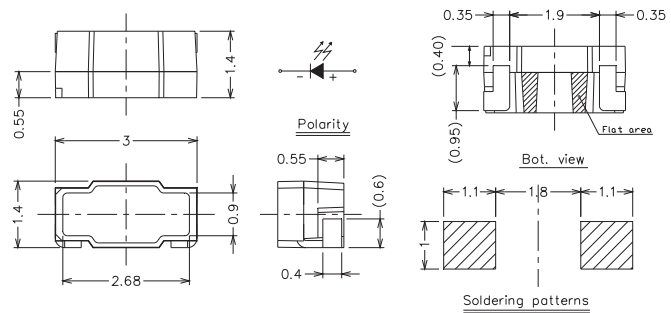

Product	Size (LXWXHmm)	Color	I _V (mcd)	Wavelength (nm)	V _F (V)	Viewing Angle (°)
50-215UMC/3437555/TR8	3.0x1.4x1.4	○White	1800~2000	x=0.2970~0.3205 y=0.2850~0.3270	3.05~3.45	120




UNIT : mm

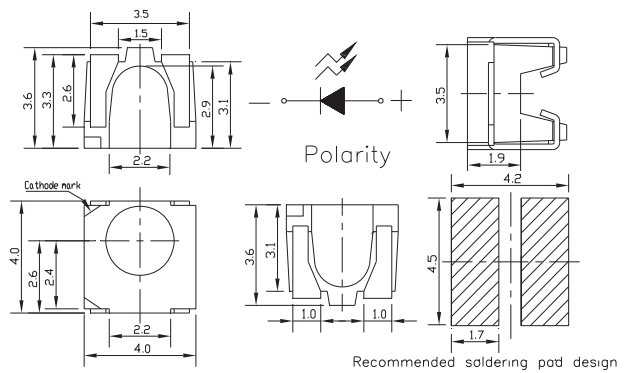

Product	Size (LXWXH mm)	Color	λ _d (nm)/CIE(x,y)	I _V Min./Typ. (mcd)	I _V Max. (mcd)	V _F Min./Typ. (V)	V _F Max. (V)
57-11UTC/S827-1/TR8	4.0x4.0x3.6	○White	x=0.3130~0.3450 y=0.2840~0.3520	900	1800	2.75	3.95



UNIT : mm

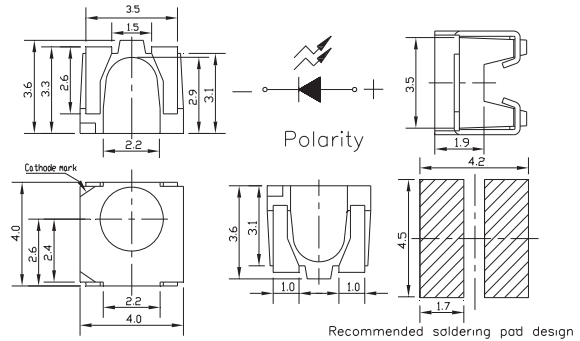


Product	Size (LXWXH mm)	Color	λ _d (nm)/CIE(x,y)	I _V Min./Typ. (mcd)	I _V Max. (mcd)	V _F Min./Typ. (V)	V _F Max. (V)	I _F (mA)
57-21R6C-AP1Q2B/BF	4.0x4.0x3.6	● Brilliant Red	617.5~633.5	45	112	1.75	2.35	20
57-21SYGC/S530-E3/TR8	4.0x4.0x3.6	● Brilliant Yellow Green	573	32	--	1.7 / 2.0	2.4	20

SMD LED | Surface Mount PLCC LEDs (Reflector) | Side View LED




UNIT : mm

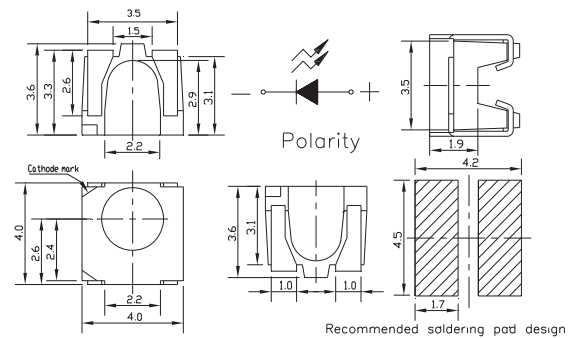

Product	Size (LXWXHmm)	Color	I _V (mcd)	λ _d (nm)/CIE(x,y)	V _F (V)	Viewing Angle (°)
57-21-Y2C-H5S1T1B0E-BT8-AM	4.0x4.0x3.6	Yellow	180~355	590~596	1.75~2.35	120
57-21-B1C-A1J1K2A1C-BT8-AM	4.0x4.0x3.6	Blue	4.5~11.2	462~468	2.9~4.4	120
57-21-GPSC-U8M1N2A5E-BT8-AM	4.0x4.0x3.6	Green	18~45	559~568	1.8~2.4	120
57-21-B5P-A9V1ABBHE-BT8-AM	4.0x4.0x3.6	Ice Blue	710~1800	x=0.2 y=0.3	2.55~3.95	120



UNIT : mm

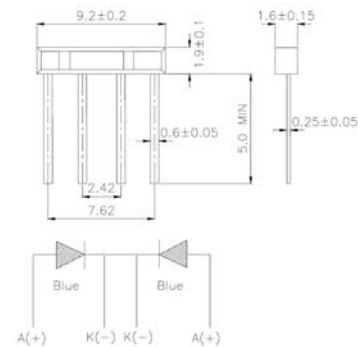


Product	Size (LXWXH mm)	Color	λ _d (nm)	I _V Min./Typ. (mcd)	I _V Max. (mcd)	V _F Min./Typ. (V)	V _F Max. (V)	I _F (mA)
94-22SUBC/S400-A4/S2	9.2x1.6x1.9	Blue	470	50	70	3.5	4.3	20

SMD LED | Surface Mount PLCC LEDs (Reflector) | Side View LED




UNIT : mm

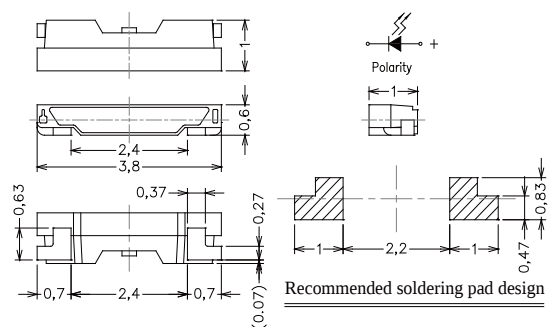

Product	Size (LXWXH mm)	Color	I _V (lm)	CIE	V _F (V)	Viewing Angle (°)
99-616LM2C/L6772SG6/TR8-T	3.8x1.0x0.6	○ White	6.75-7.5	x=0.282~0.304 y=0.262~0.301	2.95~3.45	115
99-616LM2C/L6570SGS/TR8-T	3.8x1.0x0.6	○ White	6.5-7.25	x=0.282~0.304 y=0.262~0.301	2.7~3.1	115



UNIT : mm

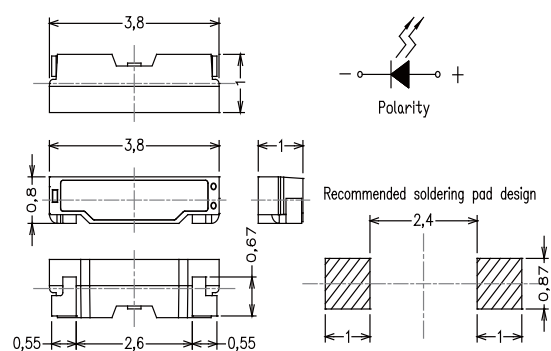


Product	Size (LXWXH mm)	Color	I _V (lm)	CIE	V _F (V)	Viewing Angle (°)
99-713LM2C/L6772T3U6FO/TR8-T	3.8x1.0x0.8	○ White	6.75-7.5	x=0.274~0.296 y=0.254~0.293	2.95~3.45	120

Super Flux LED ■ 3 mm




UNIT : mm

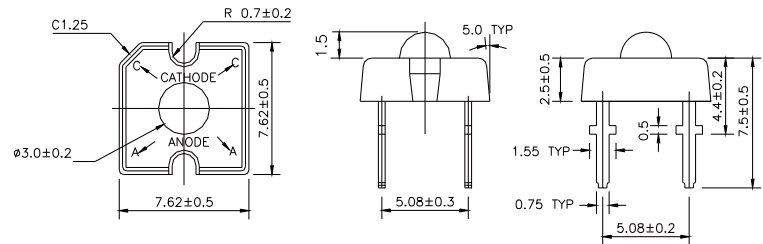


Product	Size (LXWXHmm)	Color	I _v (mlm)	Wavelength (nm)	V _F (V)	Viewing Angle (°)
30-01-B84-RFC-D4T1U1DH-AM	7.62x7.62x9	Red	7150~14250	620~632	1.9~2.9	85
30-01-B84-YSC-A1T1U1DH-AM	7.62x7.62x9	Yellow	7150~14250	587~596	1.9~2.9	85
30-01-B74-S3NC-C6T1U1DH-AM	7.62x7.62x9	Orange	7150~14250	611~620	1.9~2.9	80
30-01/B4C-AKNB	7.62x7.62x9	Blue	1125~2850	464~476	2.8~3.8	80
30-01/G4C-ARTB	7.62x7.62x9	Green	4500~9000	520~532	3.0~4.0	80
31-01-B14-S3NC-C6T1U1DH-AM	7.62x7.62x9	Orange	7150~14250	611~620	1.9~2.9	50
31-01/T4C-4PRB	7.62x7.62x9	White	2850~5650	x=0.30 y=0.29	2.8~3.8	45
31-01/B4C-AKNB	7.62x7.62x9	Blue	1125~2850	464~476	2.8~3.8	50
33-01-C44-RRFC-D1T1U1CH-AM	7.62x7.62x9	Red	7150~14250	620~628	1.9~2.9	110
33-01-C34-YYSC-A5T1U1CH-AM	7.62x7.62x9	Yellow	7150~14250	590~598	1.9~2.9	105
33-01/G4C-ARTB	7.62x7.62x9	Green	4500~9000	520~532	3.0~4.0	90
33-01/B4C-AHKB	7.62x7.62x9	Blue	715~1425	464~472	2.8~4.0	80
38-01-A84-S3NC-C1S2T2CH-AM	7.62x7.62x9	Orange	5650~11250	610~620	1.9~2.9	40
38-01-A84-RAC-D4T1U1DH-AM	7.62x7.62x9	Red	7150~14250	620~632	1.9~2.9	40
38-01-A74-YSC-A2T1U1DH-AM	7.62x7.62x9	Yellow	7150~14250	586~594	1.9~2.9	35

Super Flux LED | 5 mm

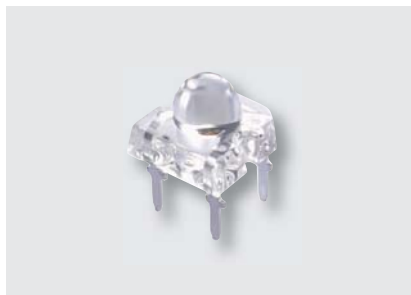

UNIT : mm

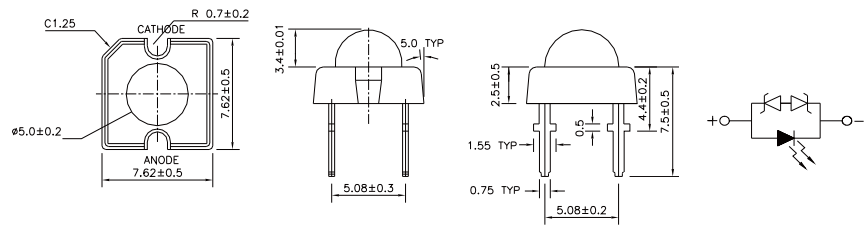


Product	Size (LXWXHmm)	Color	I _V (mIm)	Wavelength (nm)	V _F (V)	Viewing Angle (°)
35-01/T4C-4PRB	7.62x7.62x9	○ White	2850~5650	x=0.30 y=0.29	3.0~4.0	25
35-01/B4C-AKNB	7.62x7.62x9	● Blue	1125~2850	464~476	2.8~3.8	25

Super Flux LED | Flat



UNIT : mm

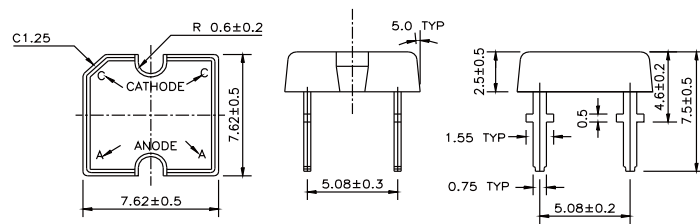


Product	Size (LXWXHmm)	Color	I _V (mIm)	Wavelength (nm)	V _F (V)	Viewing Angle (°)
10-01-C84-YSC-AAS2T2DH-AM	7.62x7.62x7.5	● Yellow	5650~11250	589~598	1.9~2.9	130
32-01/B4C-AJMB	7.62x7.62x7.5	● Blue	900~2250	464~476	2.8~3.8	130
32-01/G4C-AQSB	7.62x7.62x7.5	● Green	3600~7150	520~532	2.8~3.8	130
32-01/T4C-4PRB	7.62x7.62x7.5	○ White	2850~5650	x=0.30 y=0.29	2.8~3.8	130

LED Lamps | 2mm Tower Type



UNIT : mm

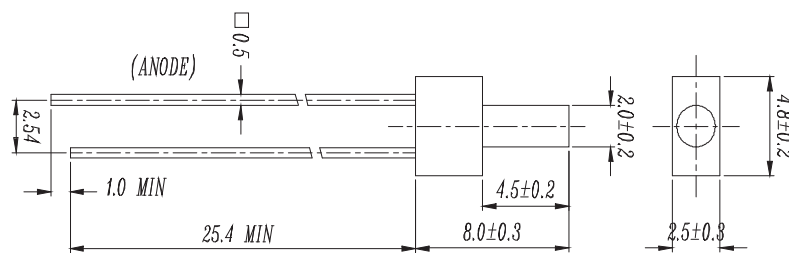


Product	Size (mm)	Color	Lens Type	λ_d (nm) / CIE(x,y)	Resin Color	I_v (Min/Typ/Max)	V_F (Min/Typ/Max)	Viewing Angle (°)
103SUBD/S400-A4	2.0	● Super Blue	Tower	470	Color Diffused	40 / 80	3.4 / 4.0	100
103SURD/S530-A3	2.0	● Hyper Red	Tower	624	Color Diffused	25 / 40	2.0 / 2.4	130
103SYGD/S530-E2	2.0	● Super Yellow Green	Tower	573	Color Diffused	6.3 / 12.5	2.0 / 2.4	130

LED Lamps | 3mm Round Type




UNIT : mm

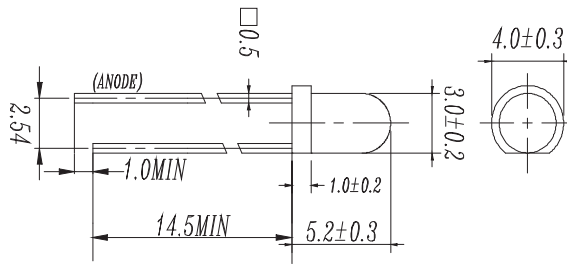

Product	Size (mm)	Color	Lens Type	λ_d (nm) / CIE(x,y)	Resin Color	I_v (Min/Typ/Max)	V_F (Min/Typ/Max)	Viewing Angle (°)
204-10SDRD/S530-A3	3	● Super Deep Red	Round	639	Color Diffused	40 / 80	2.0 / 2.4	50
204-10SUBC/S400-A4	3	● Super Blue	Round	468	Water Clear	400 / 800	3.4 / 4.0	20
204-10SUGC/S400-A5	3	● Super Green	Round	530	Water Clear	1600 / 3200	3.4 / 4.0	30
204-10SURC/S400-A8	3	● Brilliant Red	Round	632	Water Clear	1000 / 2000	2.0 / 2.4	20
204-10SURC/S530-A3	3	● Hyper Red	Round	624	Water Clear	250 / 500	2.0 / 2.4	25
204-10SURC/S530-A3-L	3	● Brilliant Red	Round	624	Water Clear	250 / 400	2.0 / 2.4	30
204-10SURD/S530-A3	3	● Brilliant Red	Round	624	Color Diffused	40 / 80	2.0 / 2.4	45
204-10SURD/S530-A3-L	3	● Brilliant Red	Round	624	Color Diffused	10 / 20	2.0 / 2.4	45
204-10SURT/S530-A3	3	● Hyper Red	Round	624	Trans	250 / 500	1.7/2.0/2.4	20
204-10SYGC/S530-E2	3	● Super Yellow Green	Round	573	Water Clear	125 / 250	2.0 / 2.4	20
204-10SYGD/S530-E3	3	● Super Yellow Green	Round	573	Color Diffused	63 / 100	2.0 / 2.4	45
204-10SYGT/S530-E2	3	● Super Yellow Green	Round	573	Trans	100 / 200	2.0 / 2.4	20
204-10USOC/S400-A9	3	● Super Sunset Orange	Round	615	Water Clear	1600 / 3200	2.0 / 2.4	20
204-10UYC/S400-A9	3	● Super Yellow	Round	589	Water Clear	1000 / 3200	2.0 / 2.4	20
204-10UYC/S530-A3	3	● Super Yellow	Round	589	Water Clear	310 / 540	2.0 / 2.4	20
204-10UYC/S530-A3-L	3	● Brilliant Yellow	Round	589	Water Clear	320 / 400	2.0 / 2.4	20
204-10UYD/S530-A3	3	● Super Yellow	Round	589	Color Diffused	100 / 200	2.0 / 2.4	40
204-10UYD/S530-A3-L	3	● Super Yellow	Round	589	Color Diffused	100 / 200	2.0 / 2.4	60
204-10UYOC/S530-A3	3	● Yellow Orange	Round	605	Water Clear	320 / 500	2.0 / 2.4	30
204-10UYT/S530-A3	3	● Super Yellow	Round	589	Trans	250 / 500	2.0 / 2.4	20


LED Lamps | 3mm Round Type

UNIT : mm

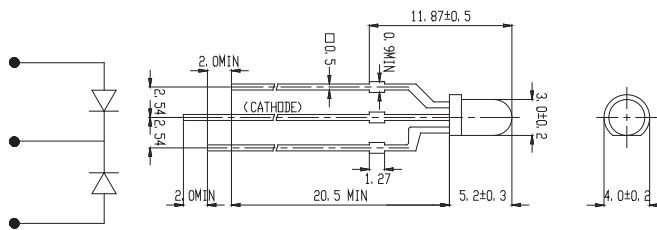

Product	Size (mm)	Color	Lens Type	λ_d (nm) / CIE(x,y)	Resin Color	I_v (Min/Typ/Max)	V_F (Min/Typ/Max)	Viewing Angle (°)
209SURSYGW/S530-A3	3	● Hyper Red / ● Super Yellow Green	Round	624 / 573	White Diffused	40 / 80 20 / 40	2.0 / 2.4 2.0 / 2.4	80
209SDRSYGW/S530-A3	3	● Super Deep Red / ● Super Yellow Green	Round	639 / 573	White Diffused	25 / 50 16 / 32	2.0 / 2.4 2.0 / 2.4	80
209SURSYGC/S530-A3	3	● Hyper Red / ● Super Yellow Green	Round	624 / 573	Water Clear	63 / 125 40 / 80	2.0 / 2.4 2.0 / 2.4	80
209SURSYGW/S530-A3	3	● Hyper Red / ● Super Yellow Green	Round	624 / 573	White Diffused	40 / 80 20 / 40	2.0 / 2.4 2.0 / 2.4	80
209UYOSUGC/S530-A3	3	● Super Yellow Orange / ● Brilliant Green	Round	611 / 518	Water Clear	100 / 200 160 / 320	2.0 / 2.4 3.5 / 4.3	50

UNIT : mm

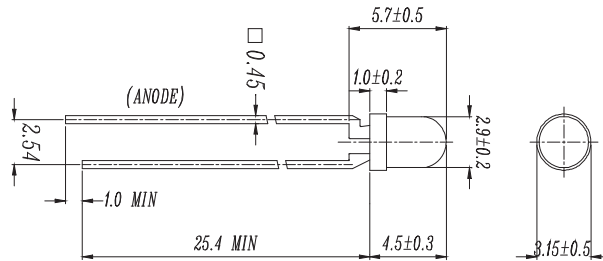


Product	Size (mm)	Color	Lens Type	λ_d (nm) / ClE(x,y)	Resin Color	I_v (Min/Typ/ Max)	V_F (Min/Typ / Max)	Viewing Angle (°)
264-7SDRC/S530-A3	2.9	Super Deep Red	Round	639	Water Clear	40 / 100	1.7 / 2.0 / 2.4	40
264-7SDRD/S530-A3	2.9	Super Deep Red	Round	639	Color Diffused	50 / 100	2.0 / 2.4	60
264-7SUGC/C525	2.9	Brilliant Green	Round	525	Water Clear	400 / 800	3.5 / 4.3	30
264-7SURC/S400-A8	2.9	Hyper Red	Round	624	Water Clear	400 / 800	2.0 / 2.4	40
264-7SURD/S530-A3	2.9	Brilliant Red	Round	624	Color Diffused	63 / 125	2.0 / 2.4	60
264-7SURT/S530-A3	2.9	Hyper Red	Round	624	Trans	160 / 320	2.0 / 2.4	40
264-7SYGC/S530-E3	2.9	Super Yellow Green	Round	573	Water Clear	100 / 320	2.0 / 2.4	35
264-7SYGD/S530-E2	2.9	Super Yellow Green	Round	573	Color Diffused	20 / 32	2.0 / 2.4	60
264-7SYGT/S530-E2	2.9	Super Yellow Green	Round	573	Trans	63 / 125	2.0 / 2.4	40
264-7UYC/S400-A9	2.9	Super Yellow	Round	589	Water Clear	400 / 800	2.0 / 2.4	40


LED Lamps | 3mm Round Type




UNIT : mm

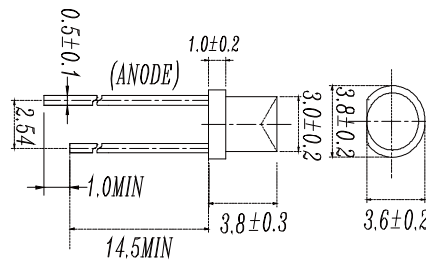

Product	Size (mm)	Color	Lens Type	λ_d (nm) / CIE(x,y)	Resin Color	I_v (Min/Typ/Max)	V_F (Min/Typ/Max)	Viewing Angle (°)
484-10SURT/S530-A3	3	● Hyper Red	Round	624	Trans	10 / 20	2.0 / 2.4	130
484-10UTC/S400-A6	3	● Warm White	Round	x=0.29 y=0.28	Water Clear	39 / 332	2.75 / 3.85	120
484-10UYT/S530-A3	3	● Super Yellow	Round	589	Trans	16 / 32	2.0 / 2.4	110

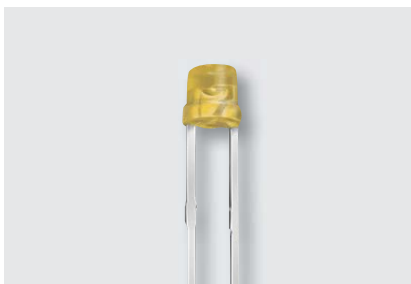


UNIT : mm

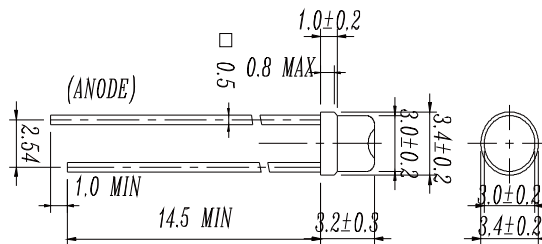

Product	Size (mm)	Color	Lens Type	λ_d (nm) / CIE(x,y)	Resin Color	I_v (Min/Typ/Max)	V_F (Min/Typ/Max)	Viewing Angle (°)
494-10SURT/S530-A3	3	● Hyper Red	Round	624	Trans	16 / 32	2.0 / 2.4	100
494-10SYGT/S530-E2	3	● Brilliant Yellow Green	Round	573	Trans	10 / 20	2.0 / 2.4	100



UNIT : mm

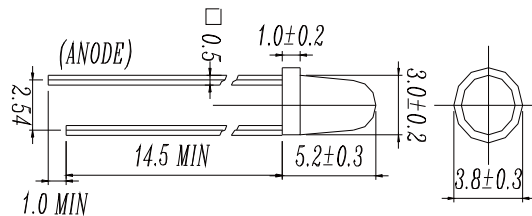


Product	Size (mm)	Color	Lens Type	λ_d (nm)/CIE(x,y)	Resin Color	I_v (Min/Typ/Max)	V_F (Min/Typ/Max)	Viewing Angle (°)
1224SYGC/S530-E2	3	● Super Yellow Green	Round	573	Water Clear	63 / 100	1.7 / 2.0 / 2.4	25
1224USOC/S530-A3	3	● Super Sunset Orange	Round	615	Water Clear	188 / 295	1.7 / 2.0 / 2.4	25
1224UTC/S400-A6	3	○ White	Round	x=0.29 y=0.28	Water Clear	715 / 2850	3.0 / 4.0	25


LED Lamps | 3mm Round Type




UNIT : mm

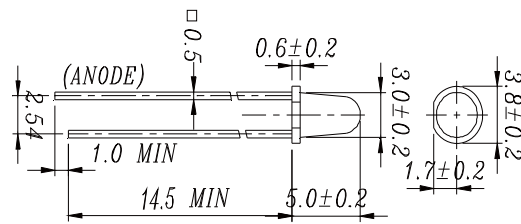

Product	Size (mm)	Color	Lens Type	λ_d (nm) / CIE(x,y)	Resin Color	I_v (Min/Typ/Max)	V_F (Min/Typ/Max)	Viewing Angle (°)
1254-10SDRD/S530-A3	3	Super Deep Red	Round	639	Color Diffused	100 / 160	2.0 / 2.4	30
1254-10SURD/S530-A3	3	Hyper Red	Round	624	Color Diffused	250/400	2.0 / 2.4	30
1254-10SURT/S530-A3	3	Hyper Red	Round	624	Trans	160 / 320	2.0 / 2.4	30
1254-10SYGD/S530-E2	3	Super Yellow Green	Round	573	Color Diffused	40 / 63	2.0 / 2.4	40
1254-10SYGT/S530-E2	3	Super Yellow Green	Round	573	Trans	160 / 320	2.0 / 2.4	30
1254-10UYD/S530-A3	3	Super Yellow	Round	589	Color Diffused	100 / 200	2.0 / 2.4	30

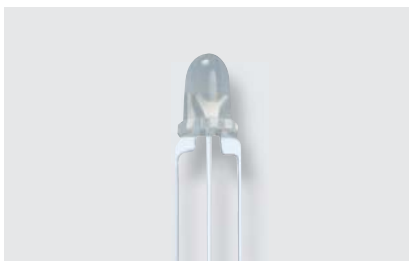

UNIT : mm

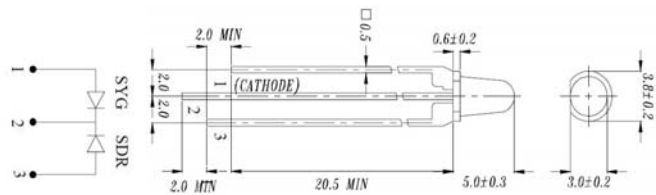


Product	Size (mm)	Color	Lens Type	λ_d (nm)/CIE(x,y)	Resin Color	I_v (Min/Typ/Max)	V_F (Min/Typ/Max)	Viewing Angle (°)
1259-7SDRSYGW/S530-A3	3	Super Deep Red Super Yellow Green	Round	639 / 573	White Diffused	16 / 32 25 / 50	2.0 / 2.4 2.0 / 2.4	50
1259-7SURSYGW/S530-A3	3	Hyper Red Super Yellow Green	Round	624 / 573	White Diffused	40 / 80 16 / 32	2.0 / 2.4 2.0 / 2.4	60
1259-7UYSYGW/S530-A3	3	Super Yellow Super Yellow Green	Round	589 / 573	White Diffused	63 / 125 40 / 80	2.0 / 2.4 2.0 / 2.4	40


LED Lamps | 3mm Round Type




UNIT : mm

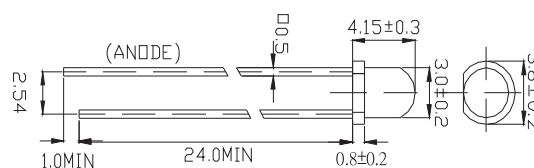

Product	Size (mm)	Color	Lens Type	λ_d (nm)/ CIE(x,y)	Resin Color	I_V (Min/Typ/Max)	V_F (Min/Typ / Max)	Viewing Angle (°)
3294-15SUBC/S400-A6	3	● Super Blue	Round	470	Water Clear	160 / 320	3.4 / 4.0	90
3294-15SUGC/S400-A6	3	● Super Green	Round	530	Water Clear	500 / 1250	3.4 / 4.0	45
3294-15SURC/S400-A7	3	● Hyper Red	Round	624	Water Clear	100 / 200	2.0 / 2.4	90
3294-15UBGC/S400-A6	3	● Super Yellow Green	Round	505	Water Clear	400 / 800	3.5 / 4.3	90

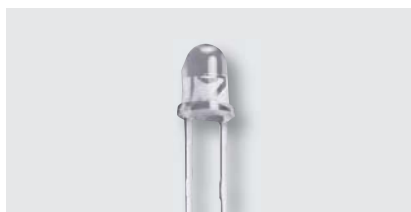

UNIT : mm

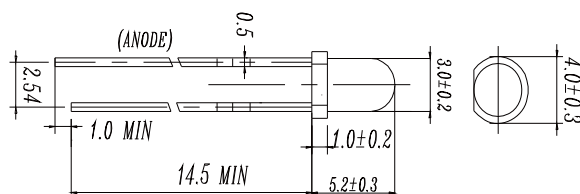


Product	Size (mm)	Color	Lens Type	λ_d (nm)/ CIE(x,y)	Resin Color	I_V (Min/Typ/Max)	V_F (Min/Typ / Max)	Viewing Angle (°)
4204-10SYGC/S530-E4	3	● Super Yellow Green	Round	573	Water Clear	250 / 500	2.0 / 2.4	20


LED Lamps | 5mm Round Type




UNIT : mm

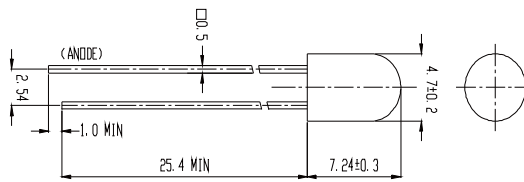

Product	Size (mm)	Color	Lens Type	λ_d (nm)/ CIE(x,y)	Resin Color	I_V (Min/Typ/Max)	V_F (Min/Typ / Max)	Viewing Angle (°)
313-2SYGC/S530-E2	4.7	● Super Yellow Green	Round	573	Water Clear	250 / 500	2.0 / 2.4	20
313-2SYGD/S530-E2	4.7	● Brilliant Yellow Green	Round	573	Color Diffused	40 / 80	2.0 / 2.4	45
313-2UYD/S530-A3	4.7	● Super Yellow	Round	589	Color Diffused	100 / 200	2.0 / 2.4	50

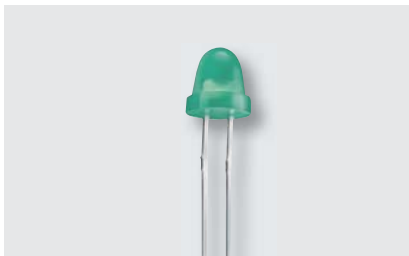


UNIT : mm

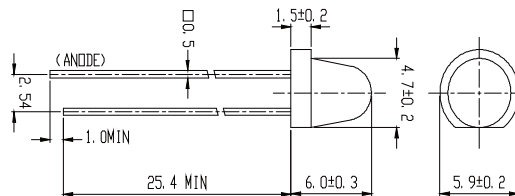

Product	Size (mm)	Color	Lens Type	λ_d (nm)/ CIE(x,y)	Resin Color	I_V (Min/Typ/Max)	V_F (Min/Typ / Max)	Viewing Angle (°)
323-2SURD/S530-A3	4.7	● Hyper Red	Round	624	Color Diffused	63 / 100	2.0 / 2.4	40
323-2SYGD/S530-E2	4.7	● Super Yellow Green	Round	573	Color Diffused	40 / 80	2.0 / 2.4	60



UNIT : mm

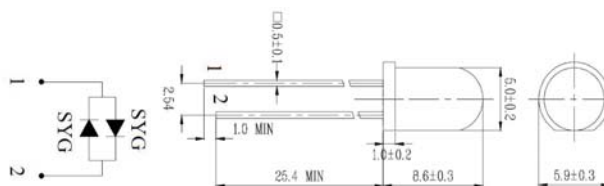


Product	Size (mm)	Color	Lens Type	λ_d (nm)/ CIE(x,y)	Resin Color	I_V (Min/Typ/Max)	V_F (Min/Typ / Max)	Viewing Angle (°)
336SURYSGW/S530-A3	5	● Hyper Red/ ● Super Yellow Green	Round	624 / 573	White Diffused	16 / 32 16 / 32	2.0 / 2.4 2.0 / 2.4	90
336SYGSYGD/S530-E2	5	● Super Yellow Green ● Super Yellow Green	Round	573 / 573	Color Diffused	8 / 16 8 / 16	2.0 / 2.4 2.0 / 2.4	90

LED Lamps | 5mm Round Type



UNIT : mm

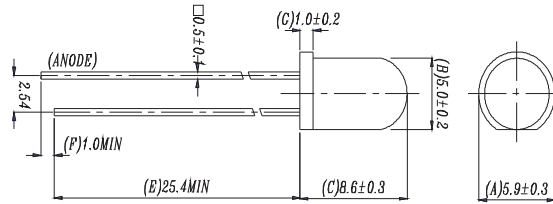


Product	Size (mm)	Color	Lens Type	λ_d (nm)/ CIE(x,y)	Resin Color	I_v (Min/Typ/Max)	V_F (Min/Typ / Max)	Viewing Angle (°)
333-2SDRC/S530-A4	5	● Super Deep Red	Round	639	Water Clear	400/1000	1.7/2.0/2.4	10
333-2SDRD/S530-A3	5	● Super Deep Red	Round	639	Color Diffused	100/160	2.0 / 2.4	30
333-2SDRT/S530-A3	5	● Hyper Red	Round	624	Trans	500/1250	2.0 / 2.4	10
333-2SUBC/C470/S400-A6	5	● Blue	Round	470	Water Clear	1000/2000	3.4 / 4.0	10
333-2SUBD/S400-A4	5	● Super Blue	Round	470	Color Diffused	400/800	3.4 / 4.0	20
333-2SUBW/C470/S400-A4	5	● Super Blue	Round	470	White Diffused	100/200	3.4 / 4.0	40
333-2SUGC/C525	5	● Super Green	Round	525	Water Clear	1600/3200	3.5 / 4.3	10
333-2SUGC/S400-A5	5	● Super Green	Round	530	Water Clear	4000/8000	3.4 / 4.0	15
333-2SURC/S400-A8	5	● Hyper Red	Round	624	Water Clear	3200/5000	2.0 / 2.4	10
333-2SURC/S530-A2	5	● Hyper Red	Round	631	Water Clear	344/837	1.7/2.0/2.4	10
333-2SURD/S530-A3	5	● Hyper Red	Round	624	Color Diffused	100/200	1.7/2.0/2.4	30
333-2SURT/S530-A3	5	● Hyper Red	Round	624	Trans	400/800	2.0 / 2.4	10
333-2SYGC/S530-E2	5	● Super Yellow Green	Round	573	Water Clear	400/800	1.7/2.0/2.4	10
333-2SYGD/S530-E2	5	● Super Yellow Green	Round	573	Color Diffused	40/80	2.0 / 2.4	30
333-2SYGT/S530-E2	5	● Brilliant Yellow Green	Round	573	Trans	250/400	2.0 / 2.4	10
333-2SYGW/S530-E2	5	● Super Yellow Green	Round	573	White Diffused	63/125	2.0 / 2.4	35
333-2UBC/C430	5	● Blue	Round	466	Water Clear	160/320	3.8 / 4.5	10
333-2UTC/S400-A6	5	○ White	Round	x=0.29 y=0.30	Water Clear	3600 / 9000	2.8 / 3.6	15
333-2UYC/S400-A4	5	● Super Yellow	Round	589	Water Clear	1432/2148	1.7/2.0/2.4	10
333-2UYC/S400-A7	5	● Super Yellow	Round	589	Water Clear	2500/4000	2.0 / 2.4	10
333-2UYC/S530-A3	5	● Super Yellow	Round	589	Water Clear	630/1600	2.0 / 2.4	10
333-2UYC/S530-A6	5	● Super Yellow	Round	589	Water Clear	2000/3200	2.0 / 2.4	10
333-2UYD/S530-A3	5	● Super Yellow	Round	589	Color Diffused	160/320	2.0 / 2.4	35

LED Lamps | 5mm Round Type



UNIT : mm

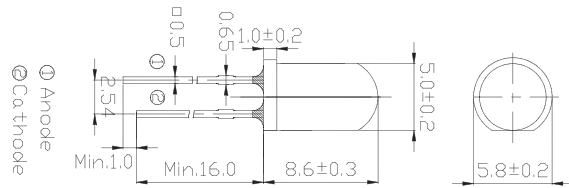


Product	Size (mm)	Color	Lens Type	λ_d (nm)/ CIE(x,y)	Resin Color	I_v (Min/Typ/Max)	V_F (Min/Typ / Max)	Viewing Angle (°)
334-15/T1C1-1VXA	5	○ White	Round	X:0.29 y:0.28	Water Clear	11250 / 22500	2.8 / 3.6	15
334-15/T1C1-4VXC	5	○ White	Round	X:0.30 y:0.29	Water Clear	11250 / 22500	2.8 / 3.6	15
334-15/T1C1-7VXC	5	○ White	Round	X:0.30 y:0.29	Water Clear	11250 / 22500	2.8 / 3.6	15
334-15/T1C3-7TVA	5	○ White	Round	X:0.30 y:0.29	Water Clear	7150 / 14250	2.8 / 3.6	30
334-15/T1C5-4PRA	5	○ White	Round	X:0.30 y:0.29	Water Clear	2850 / 5650	2.8 / 3.6	50
334-15/T2C1-1SUB	5	○ White	Round	X:0.29 y:0.28	Water Clear	5650 / 11250	2.8 / 3.6	15
334-15/T2C1-1UWA	5	○ White	Round	X:0.29 y:0.28	Water Clear	9000 / 18000	2.8 / 3.6	15
334-15/T2C1-1UWB	5	○ White	Round	X:0.29 y:0.28	Water Clear	9000 / 18000	2.8 / 3.6	15
334-15/T2C1-2UWC	5	○ White	Round	X:0.26 y:0.27	Water Clear	9000 / 18000	2.8 / 3.6	15
334-15/T2C1-4UWC	5	○ White	Round	X:0.30 y:0.29	Water Clear	9000 / 18000	2.8 / 3.6	15
334-15/T2C1-4UWC/R10	5	○ White	Round	X:0.30 y:0.29	Water Clear	9000 / 18000	2.8 / 3.6	15
334-15/T2C1-7UWC	5	○ White	Round	X:0.30 y:0.29	Water Clear	9000 / 18000	2.8 / 3.6	15
334-15/T2C2-1TVB	5	○ White	Round	X:0.29 y:0.28	Water Clear	7150 / 14250	2.8 / 3.6	20
334-15/T2C2-6TVB	5	○ White	Round	X:0.29 y:0.28	Water Clear	7150 / 14250	2.8 / 3.6	20
334-15/T2C2-6TWB	5	○ White	Round	X:0.33 y:0.34	Water Clear	7150 / 18000	2.8 / 3.6	20
334-15/T2C2-7TVA	5	○ White	Round	X:0.29 y:0.28	Water Clear	7150 / 14250	2.8 / 3.6	20
334-15/T2C3-1RTB	5	○ White	Round	X:0.29 y:0.28	Water Clear	4500 / 9000	2.8 / 3.6	30
334-15/T2C3-2RTC	5	○ White	Round	X:0.26 y:0.27	Water Clear	4500 / 9000	3.0 / 3.6	30
334-15/T2C3-4RTB	5	○ White	Round	X:0.30 y:0.29	Water Clear	4500 / 9000	2.8 / 3.6	30
334-15/T2C5-1MQB	5	○ White	Round	X:0.29 y:0.28	Water Clear	1800 / 4500	2.8 / 3.6	50
334-15/X1C2-1UWA	5	● Warm White	Round	X:0.40 y:0.39	Water Clear	9000 / 18000	2.8 / 3.6	20
334-15/X1C5-6QSA	5	● Warm White	Round	X:0.40 y:0.39	Water Clear	3600 / 7150	2.8 / 3.6	50
334-15/X2C1-1UWB	5	● Warm White	Round	X:0.40 y:0.39	Water Clear	9000 / 18000	2.8 / 3.6	15
334-15/X2C1-4UWA	5	● Warm White	Round	X:0.42 y:0.39	Water Clear	9000 / 18000	2.8 / 3.6	15

LED Lamps | 5mm Round Type




UNIT : mm

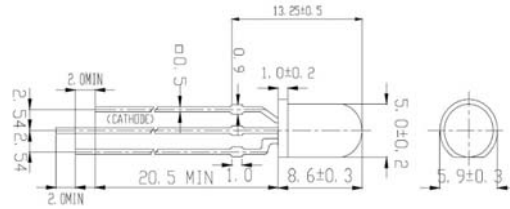

Product	Size (mm)	Color	Lens Type	λ_d (nm) / CIE(x,y)	Resin Color	I_v (Min/Typ/Max)	V_F (Min/Typ / Max)	Viewing Angle (°)
339-1SURSYGC/S530-A3	5	● Hyper Red / ● Super Yellow Green	Round	624 / 573	Water Clear	160 / 250 40 / 63	2.0 / 2.4 2.0 / 2.4	25
339-1SURSYGW/S530-A3	5	● Hyper Red / ● Super Yellow Green	Round	624 / 573	White Diffused	40 / 80 25 / 50	2.0 / 2.4 2.0 / 2.4	70
339-1UYSYGW/S530-A3	5	● Super Yellow / ● Super Yellow Green	Round	589 / 573	White Diffused	63 / 100 32 / 50	2.0 / 2.4 2.0 / 2.4	70
339-1UYUBW/S530-A4	5	● Super Yellow / ● Blue	Round	589 / 470	White Diffused	25 / 50 16 / 32	2.0 / 2.4 3.5 / 4.3	100



UNIT : mm

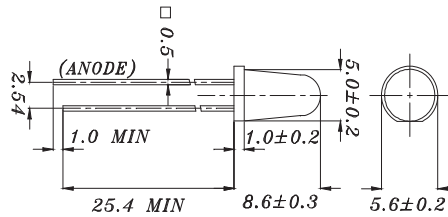


Product	Size (mm)	Color	Lens Type	λ_d (nm) / CIE(x,y)	Resin Color	I_v (Min/Typ/Max)	V_F (Min/Typ / Max)	Viewing Angle (°)
383-2SUBC/C470/S400-A6	5	● Super Blue	Round	470	Water Clear	1600 / 3200	3.4 / 4.0	20
383-2SURC/S400-A6	5	● Hyper Red	Round	624	Water Clear	4000 / 6300	2.0 / 2.4	6
383-2SURC/S400-A8	5	● Hyper Red	Round	624	Water Clear	6300 / 12500	2.0 / 2.4	6
383-2SURC/S530-A3	5	● Hyper Red	Round	624	Water Clear	1000 / 2500	2.0 / 2.4	6
383-2SURC/S530-A6	5	● Hyper Red	Round	624	Water Clear	4000 / 6300	2.0 / 2.4	6
383-2SYGC/S530-E2	5	● Brilliant Yellow Green	Round	573	Water Clear	160 / 320	2.0 / 2.4	10
383-2SYGD/S530-E2	5	● Super Yellow Green	Round	573	Color Diffused	40 / 80	2.0 / 2.4	25
383-2UBC/C470	5	● Blue	Round	470	Water Clear	400 / 800	3.5 / 4.3	6
383-2USOC/S530-A6	5	● Super Sunset Orange	Round	615	Water Clear	6300 / 8000	2.0 / 2.4	6
383-2UYC/S400-A6	5	● Super Yellow	Round	589	Water Clear	4000 / 8000	2.0 / 2.4	6
383-2UYC/S530-A3	5	● Super Yellow	Round	589	Water Clear	2713 / 4263	2.0 / 2.4	6


LED Lamps | 5mm Round Type




UNIT : mm

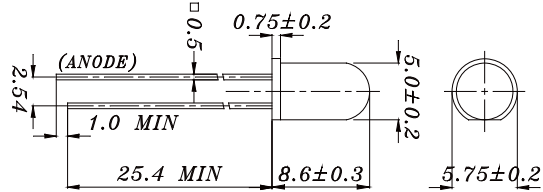

Product	Size (mm)	Color	Lens Type	λ_d (nm)/ CIE(x,y)	Resin Color	I_V (Min/Typ/Max)	V_F (Min/Typ / Max)	Viewing Angle (°)
1383-2SDRD/S530-A3	5	● Super Deep Red	Round	639	Color Diffused	160 / 320	2.0 / 2.4	30
1383-2SURD/S530-A3	5	● Brilliant Red	Round	624	Color Diffused	250 / 500	2.0 / 2.4	40
1383SDRD/S530-A3	5	● Deep Red	Round	639	Color Diffused	160 / 320	2.0 / 2.4	30
1383SURT/S530-A3	5	● Hyper Red	Round	624	Trans	400 / 800	2.0 / 2.4	25
1383SYGD/S530-E2	5	● Super Yellow Green	Round	573	Color Diffused	100 / 200	2.0 / 2.4	25
1383SYGT/S530-E2	5	● Super Yellow Green	Round	573	Trans	630 / 1250	2.0 / 2.4	20
1383UYD/S530-A3	5	● Super Yellow	Round	589	Color Diffused	400 / 800	2.0 / 2.4	25

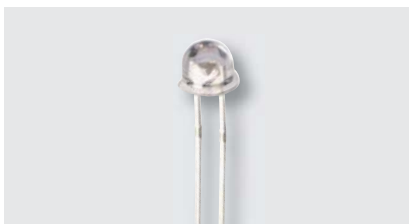


UNIT : mm

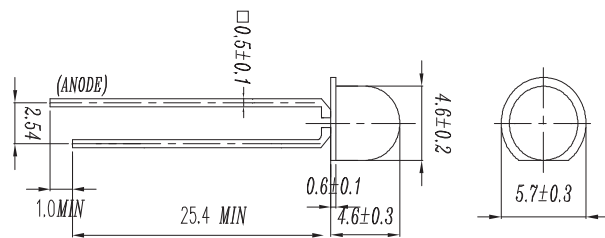

Product	Size (mm)	Color	Lens Type	λ_d (nm)/ CIE(x,y)	Resin Color	I_V (Min/Typ/Max)	V_F (Min/Typ / Max)	Viewing Angle (°)
6324-15SUBC/S400-X10	4.6	● Super Blue	Round	470	Water Clear	250 / 500	3.4 / 4.0	60
6324-15SURC/S400-A9	4.6	● Hyper Red	Round	624	Water Clear	160 / 320	2.0 / 2.4	100




UNIT : mm

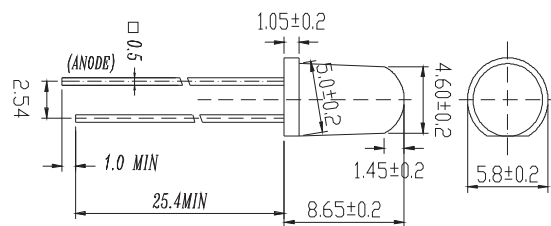

Product	Size (mm)	Color	Lens Type	λ_d (nm)/ CIE(x,y)	Resin Color	I_V (Min/Typ/Max)	V_F (Min/Typ / Max)	Viewing Angle (°)
7343-2SURC/S400-A9	4.6	● Hyper Red	Round	624	Water Clear	2500 / 3200	2.0 / 2.4	20
7343-2SURD/S530-A3	4.6	● Hyper Red	Round	624	Color Diffused	160 / 320	2.0 / 2.4	40
7343-2SYGD/S530-E3	4.6	● Brilliant Yellow Green	Round	573	Color Diffused	63 / 125	2.0 / 2.4	40
7343-2USRC/S1060	4.6	● Super Red	Round	631	Water Clear	2500 / 4000	2.0 / 2.6	30
7343-2UYC/H2/S400-A9	4.6	● Brilliant Yellow	Round	589	Water Clear	1600 / 2500	2.0 / 2.4	30
7343-2UYC/S1060	4.6	● Super Yellow	Round	589	Water Clear	1600 / 2500	2.0 / 2.6	30
7343-2UYC/S400-A9	4.6	● Brilliant Yellow	Round	589	Water Clear	1600 / 3200	2.0 / 2.4	30
7343-2UYC/S530-A3	4.6	● Super Yellow	Round	589	Water Clear	1000 / 2000	2.0 / 2.4	15


LED Lamps ■ 5mm Round Type

UNIT : mm

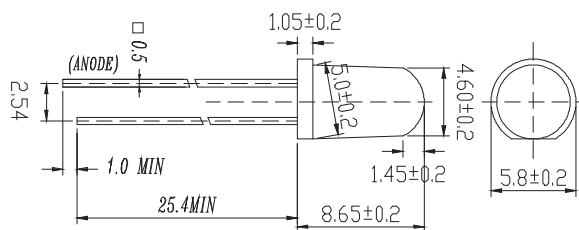


Product	Size (mm)	Color	Lens Type	λ_d (nm)/CIE(x,y)	Resin Color	I_v (Min/Typ/Max)	V_F (Min/Typ / Max)	Viewing Angle (°)
7344-15SUBC/C470/S400-A6	4.6	● Super Blue	Round	470	Water Clear	1000 / 2000	3.4 / 4.0	30
7344-15SUGC/S400-A5	4.6	● Super Green	Round	530	Water Clear	5000 / 8000	3.4 / 4.0	30
7344-15SUGC/S400-X6	4.6	● Super Green	Round	530	Water Clear	8000 / 11000	3.4 / 4.0	20

UNIT : mm

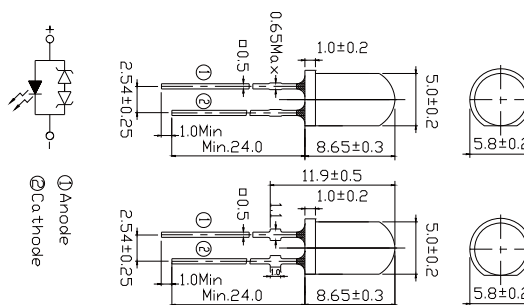


Product	Size (mm)	Color	Lens Type	λ_d (nm)/ CIE(x,y)	Resin Color	I_v (Min/Typ/Max)	V_F (Min/Typ / Max)	Viewing Angle (°)
7383/R2C3-AMQB/P	5	● Brilliant Red	Round	618~628	Water Clear	2850 / 4500 / 7150	1.8 / 2.0 / 2.6	30
7383USRW/S1089-2	5	● Super Red	Round	628	White Diffused	--	1.7 / 2.0 / 2.6	30

LED Lamps | 8mm Round Type

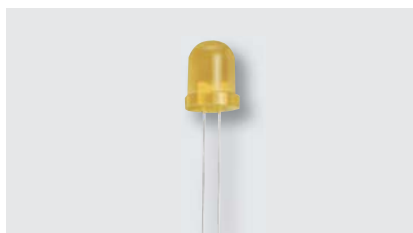


UNIT : mm

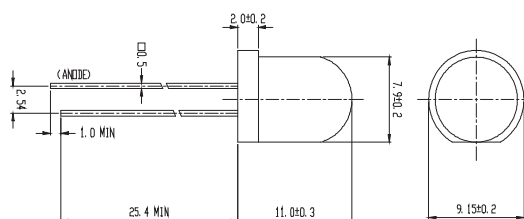


Product	Size (mm)	Color	Lens Type	λ_d (nm)/ CIE(x,y)	Resin Color	I_v (Min/Typ/Max)	V_F (Min/Typ / Max)	Viewing Angle (°)
393-2SURD/S530-A3	7.9	● Hyper Red	Round	624	Color Diffused	63 / 125	2.0 / 2.4	60
393UYD/S530-A3	7.9	● Super Yellow	Round	589	Color Diffused	80 / 125	2.0 / 2.4	60

LED Lamps | 10mm Round Type

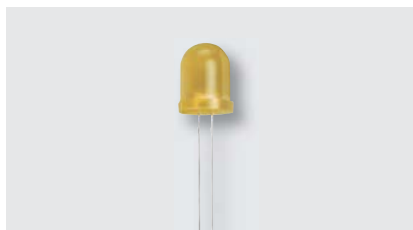

UNIT : mm

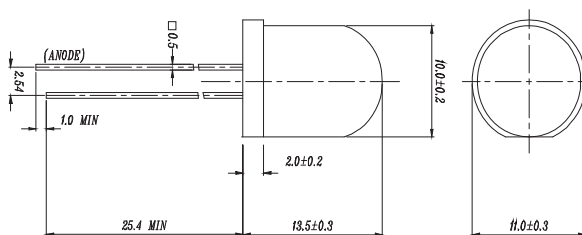


Product	Size (mm)	Color	Lens Type	λ_d (nm)/ CIE(x,y)	Resin Color	I_v (Min/Typ/Max)	V_F (Min/Typ / Max)	Viewing Angle (°)
363-2SURD/S530-A3	10	● Brilliant Red	Round	624	Color Diffused	63 / 125	2.0 / 2.4	40
363-2SYGD/S530-E2	10	● Super Yellow Green	Round	573	Color Diffused	16 / 32	2.0 / 2.4	30
363SYGD/S530-E2	10	● Super Yellow Green	Round	573	Color Diffused	16 / 32	2.0 / 2.4	40

LED Lamps | 3mm Cylindrical



UNIT : mm

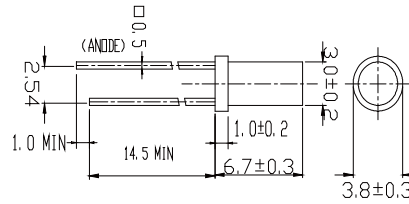


Product	Size (mm)	Color	Lens Type	λ_d (nm)/ CIE(x,y)	Resin Color	I_v (Min/Typ/Max)	V_F (Min/Typ / Max)	Viewing Angle (°)
414-10UYD/S530-A3	3	● Super Yellow	Cylindrical	589	Color Diffused	25 / 40	2.0 / 2.4	120

LED Lamps | 5mm Cylindrical



UNIT : mm

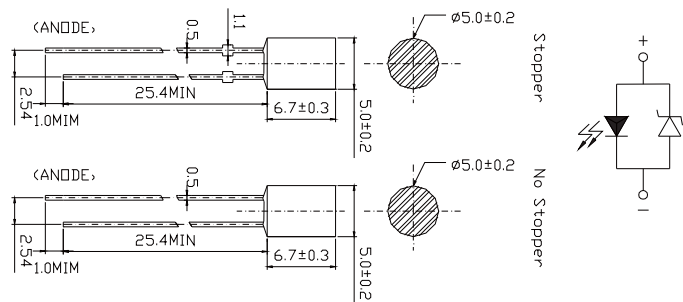


Product	Size (mm)	Color	Lens Type	λ_d (nm)/ CIE(x,y)	Resin Color	I_v (Min/Typ/Max)	V_F (Min/Typ / Max)	Viewing Angle (°)
423-2ASUGC/S400-A6/P/TR1(A)	5	● Super Green	Cylindrical	525	Water Clear	450 / 565	3.5/3.9	90
423-2UYC/S530-A6	5	● Super Yellow	Cylindrical	589	Water Clear	100 / 200	2.0 / 2.4	90

LED Lamps | 5mm Square



UNIT : mm

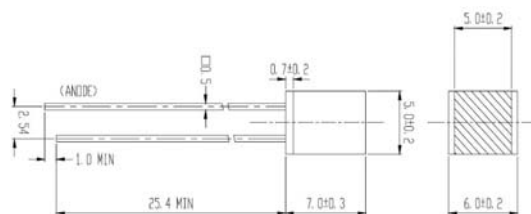


Product	Size (mm)	Color	Lens Type	λ_d (nm)/ CIE(x,y)	Resin Color	I_v (Min/Typ/Max)	V_F (Min/Typ / Max)	Viewing Angle (°)
583SURD/S530-A3	5.0 x 5.0	● Hyper Red	Square	624	Color Diffused	12.5 / 20	2.0 / 2.4	130
583SYGD/S530-E2	5.0 x 5.0	● Super Yellow Green	square	573	Color Diffused	2.5 / 5.0	2.0 / 2.4	170
583UYD/S530-A3	5.0 x 5.0	● Super Yellow	Square	589	Color Diffused	10 / 20	2.0 / 2.4	170

LED Lamps | Rectangular




UNIT : mm

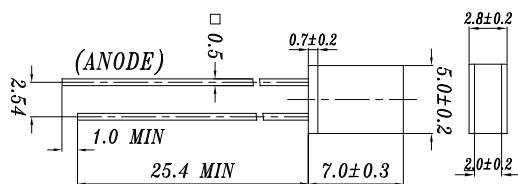


Product	Size (mm)	Color	Lens Type	λ_d (nm)/ CIE(x,y)	Resin Color	I_v (Min/Typ/Max)	V_F (Min/Typ / Max)	Viewing Angle (°)
513SURD/S530-A3	2.0 x 5.0	● Hyper Red	Rectangle	624	Color Diffused	10 / 20	2.0 / 2.4	180
513SYGD/S530-E2	2.0 x 5.0	● Super Yellow Green	Rectangle	573	Color Diffused	6.3 / 12.5	2.0 / 2.4	140




UNIT : mm

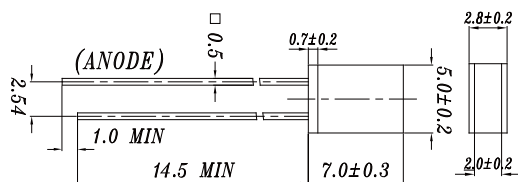

Product	Size (mm)	Color	Lens Type	λ_d (nm)/ CIE(x,y)	Resin Color	I_v (Min/Typ/ Max)	V_F (Min/Typ / Max)	Viewing Angle (°)
514SURD/S530-A3	2.0 x 5.0	● Hyper Red	Rectangle	624	Color Diffused	10 / 20	2.0 / 2.4	180
514SYGD/S530-E2	2.0 x 5.0	● Super Yellow Green	Rectangle	573	Color Diffused	2.5 / 5.0	2.0 / 2.4	180
514UYD/S530-A3	2.0 x 5.0	● Super Yellow	Rectangle	589	Color Diffused	10 / 20	2.0 / 2.4	180

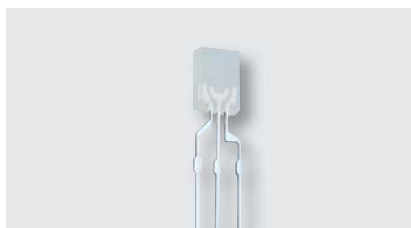

UNIT : mm

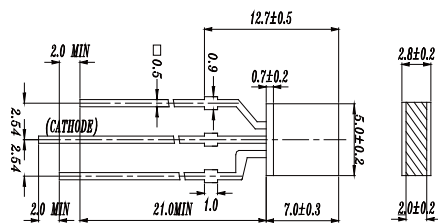


Product	Size (mm)	Color	Lens Type	λ_d (nm)/ CIE(x,y)	Resin Color	I_v (Min/Typ/ Max)	V_F (Min/Typ / Max)	Viewing Angle (°)
519-1SURSYGW/S530-A3	2.0 x 5.0	● Hyper Red / ● Super Yellow Green	Rectangle	624 / 573	White Diffused	6.3 / 12.5 2.5 / 5.0	2.0 / 2.4 2.0 / 2.4	180

LED Lamps | Rectangular




UNIT : mm

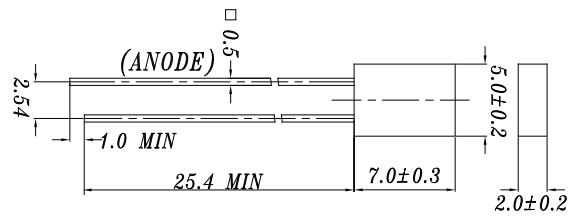

Product	Size (mm)	Color	Lens Type	λ_d (nm)/ CIE(x,y)	Resin Color	I_v (Min/Typ/Max)	V_F (Min/Typ/Max)	Viewing Angle (°)
523-2SDRD/S530-A3	2.0 x 5.0	● Super Deep Red	Rectangle	639	Color Diffused	10 / 16	2.0 / 2.4	120
523-2SURD/S530-A3	2.0 x 5.0	● Hyper Red	Rectangle	624	Color Diffused	16 / 32	2.0 / 2.4	120
523-2UYD/S530-A3	2.0 x 5.0	● Super Yellow	Rectangle	589	Color Diffused	6.3 / 12.5	2.0 / 2.4	180
523SURD/S530-A3	2.0 x 5.0	● Hyper Red	Rectangle	624	Color Diffused	16 / 25	2.0 / 2.4	170
523SYGD/S530-E2	2.0 x 5.0	● Super Yellow Green	Rectangle	573	Color Diffused	4 / 8	2.0 / 2.4	150
523UYD/S530-A3	2.0 x 5.0	● Super Yellow	Rectangle	589	Color Diffused	16 / 32	2.0 / 2.4	180




UNIT : mm

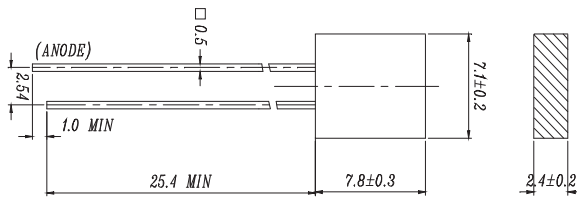

Product	Size (mm)	Color	Lens Type	λ_d (nm)/ CIE(x,y)	Resin Color	I_v (Min/Typ/Max)	V_F (Min/Typ/Max)	Viewing Angle (°)
573SURD/S530-A3	2.4 x 7.1	● Hyper Red	Rectangular	624	Color Diffused	16 / 25	1.7 / 2.0 / 2.4	120
573SYGD/S530-E2	2.4 x 7.1	● Super Yellow Green	Rectangular	573	Color Diffused	2.5 / 5.0	2.0 / 2.4	180



UNIT : mm

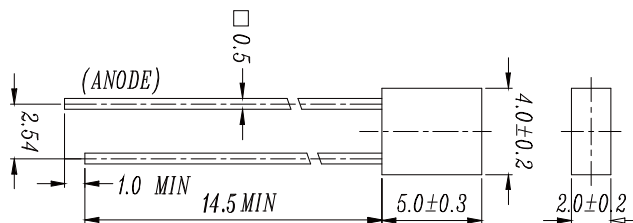


Product	Size (mm)	Color	Lens Type	λ_d (nm)/ CIE(x,y)	Resin Color	I_v (Min/Typ/Max)	V_F (Min/Typ/Max)	Viewing Angle (°)
594SUBC/C470/S400-A4	2.0 x 4.0	● Super Blue	Rectangular	470	Water Clear	40 / 63	3.4 / 4.0	100
594SURD/S530-A3	2.0 x 4.0	● Hyper Red	Rectangular	624	Color Diffused	10 / 16	2.0 / 2.4	170
594SYGD/S530-E2	2.0 x 4.0	● Super Yellow Green	Rectangular	573	Color Diffused	4.0 / 8.0	2.0 / 2.4	180
594UYD/S530-A3	2.0 x 4.0	● Super Yellow	Rectangular	589	Color Diffused	10 / 20	2.0 / 2.4	180

LED Lamps | Rectangular




UNIT : mm

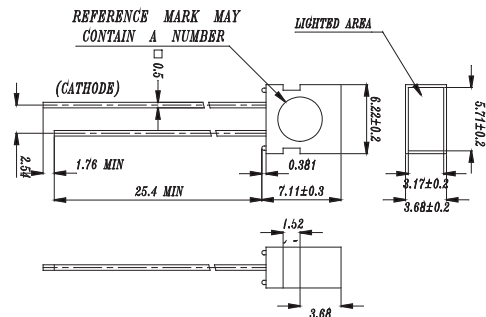

Product	Size (mm)	Color	Lens Type	λ_d (nm)/ CIE(x,y)	Resin Color	I_v (Min/Typ/ Max)	V_F (Min/Typ / Max)	Viewing Angle (°)
1003SURD/S530-A3	3.68x6.22	● Hyper Red	Rectangular	624	Color Diffused	25 / 50	2.0 / 2.4	110
1003SYGD/S530-E2	3.68x6.22	● Super Yellow Green	Rectangular	573	Color Diffused	6.3 / 12.5	2.0 / 2.4	110
1003UYD/S530-A3	3.68x6.22	● Super Yellow	Rectangular	589	Color Diffused	25 / 50	2.0 / 2.4	110




UNIT : mm

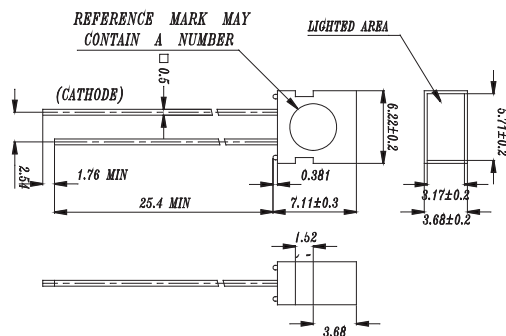

Product	Size (mm)	Color	Lens Type	λ_d (nm)/ CIE(x,y)	Resin Color	I_v (Min/Typ/ Max)	V_F (Min/Typ / Max)	Viewing Angle (°)
1006SYGSURW/S530-A3	3.68x6.22	● Super Yellow Green / ● Hyper Red	Rectangular	573 / 624	White Diffused	10 / 20 25 / 50	2.0 / 2.4 2.0 / 2.4	120



UNIT : mm

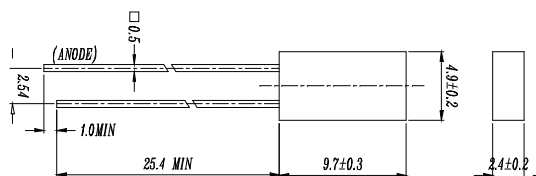


Product	Size (mm)	Color	Lens Type	λ_d (nm)/ CIE(x,y)	Resin Color	I_v (Min/Typ/ Max)	V_F (Min/Typ / Max)	Viewing Angle (°)
1533SYGD/S530-E2/O	2.4 x 4.9	● Super Yellow Green	Round	573	Color Diffused	2.5 / 5.0	2.0 / 2.4	180

LED Lamps | 3mm Assembly LED




UNIT : mm

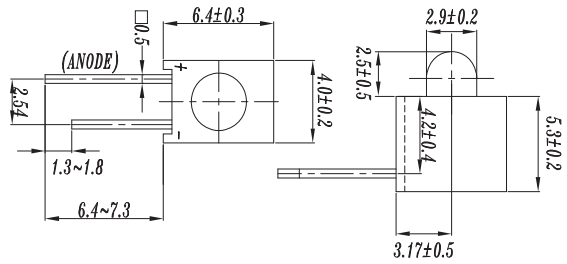


Product	Size (mm)	Color	Lens Type	λ_d (nm)/ CIE(x,y)	Resin Color	I_v (Min/Typ/Max)	V_F (Min/Typ/Max)	Viewing Angle (°)
A214B/SUR/S530-A3	3	● Hyper Red	Round	624	Color Diffused	63 / 120	2.0 / 2.4	60
A214B/SYG/S530-E2	3	● Super Yellow Green	Round	573	Color Diffused	16 / 32	2.0 / 2.4	60
A214B/UY/S530-A3	3	● Super Yellow	Round	589	Color Diffused	50 / 100	2.0 / 2.4	60




UNIT : mm

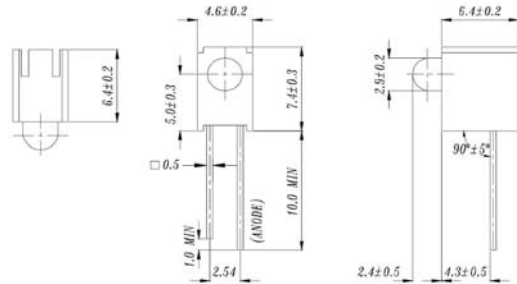

Product	Size (mm)	Color	Lens Type	λ_d (nm)/ CIE(x,y)	Resin Color	I_v (Min/Typ/Max)	V_F (Min/Typ/Max)	Viewing Angle (°)
A264B/SUB/S400-A4	3	● Super Blue	Round	470	Color Diffused	160 / 250	3.4 / 4.0	35
A264B/SUR/S530-A3	3	● Hyper Red	Round	624	Color Diffused	63 / 120	2.0 / 2.4	60
A264B/SYG/S530-E2	3	● Super Yellow Green	Round	573	Color Diffused	25 / 50	2.0 / 2.4	60
A264B/UY/S530-A3	3	● Super Yellow	Round	589	Color Diffused	50 / 100	2.0 / 2.4	60

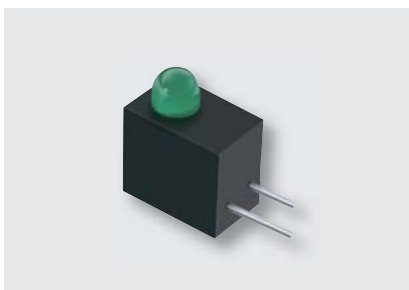


UNIT : mm

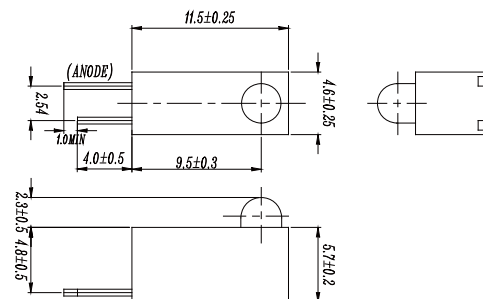


Product	Size (mm)	Color	Lens Type	λ_d (nm)/ CIE(x,y)	Resin Color	I_v (Min/Typ/Max)	V_F (Min/Typ/Max)	Viewing Angle (°)
A274B/SYG/S530-E2	3	● Super Yellow Green	Round	573	Color Diffused	25 / 50	2.0 / 2.4	60

LED Lamps | 3mm Assembly LED

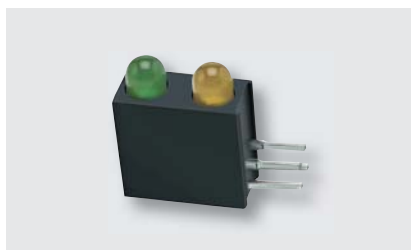


UNIT : mm

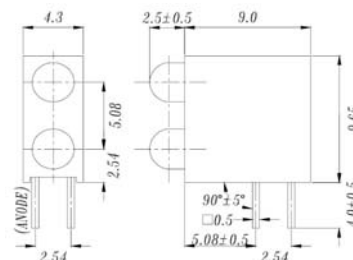

Product	Size (mm)	Color	Lens Type	λ_d (nm)/ CIE(x,y)	Resin Color	I_v (Min/Typ/Max)	V_F (Min/Typ / Max)	Viewing Angle (°)
A694B/2SUR/S530-A3	3	● Hyper Red	Round	624	Color Diffused	10 / 25	2.0 / 2.4	60
A694B/2SYG/S530-E2	3	● Super Yellow Green	Round	573	Color Diffused	25 / 50	2.0 / 2.4	60
A694B/2UY/S530-A3	3	● Super Yellow	Round	589	Color Diffused	16 / 32	2.0 / 2.4	60
A694B/SURSYG/S530-A3	3	● Hyper Red/ ● Super Yellow Green	Round	624 / 573	Color Diffused	40 / 80 25 / 50	2.0 / 2.4 2.0 / 2.4	60 / 60
A694B/SYGUY/S530-A3	3	● Super Yellow Green / ● Super Yellow	Round	573 / 589	Color Diffused	25 / 50 40 / 80	2.0 / 2.4 2.0 / 2.4	60 / 60




UNIT : mm


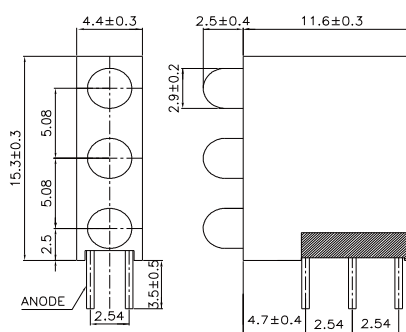


Product	Size (mm)	Color	Lens Type	λ_d (nm)/ CIE(x,y)	Resin Color	I_v (Min/Typ/Max)	V_F (Min/Typ / Max)	Viewing Angle (°)
A1394B/3SYG/S530-E2	3	● Super Yellow Green	Round	573	Color Diffused	25 / 50	2.0 / 2.4	60

LED Lamps ■ 3mm Assembly LED

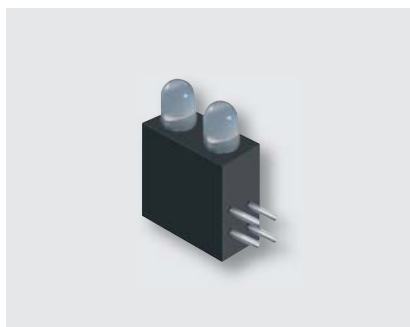


UNIT : mm

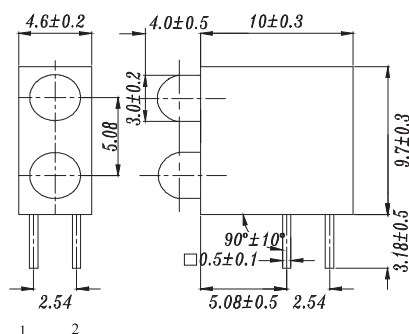


Product	Size (mm)	Color	Lens Type	λ_d (nm)/ CIE(x,y)	Resin Color	I_v (Min/Typ/Max)	V_F (Min/Typ/Max)	Viewing Angle (°)
A2784B/2SYGSDRW/ S530-A3	3	Super Yellow Green Super Deep Red	Round	573 / 639	White Diffused	16 / 32 25 / 50	2.0 / 2.4 2.0 / 2.4	50




UNIT : mm



Product	Size (mm)	Color	Lens Type	λ_d (nm)/ ClE(x,y)	Resin Color	I_v (Min/Typ/ Max)	V_F (Min/Typ/ Max)	Viewing Angle (°)
A1844B/4SYG/S530-E2	3	● Super Yellow Green	Round	573	Color Diffused	16 / 32	2.0 / 2.4	60

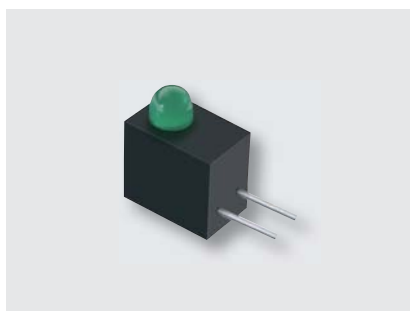

UNIT : mm

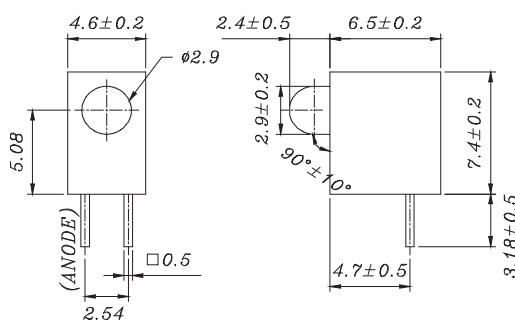


Product	Size (mm)	Color	Lens Type	λ_d (nm)/ ClE(x,y)	Resin Color	I_v (Min/Typ/ Max)	V_F (Min/Typ/ Max)	Viewing Angle (°)
A2774B/SYG/S530-E2	2.9	 Super Yellow Green	Round	573	Color Diffused	25 / 50	2.0 / 2.4	60

LED Lamps | 5mm Assembly LED




UNIT : mm

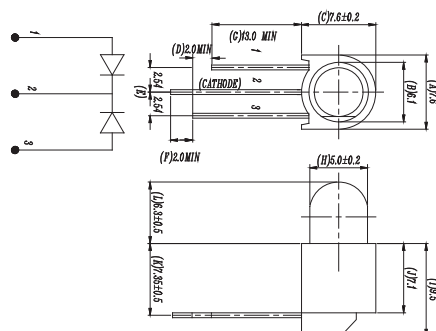

Product	Size (mm)	Color	Lens Type	λ_d (nm)/ CIE(x,y)	Resin Color	I_v (Min/Typ/Max)	V_F (Min/Typ/Max)	Viewing Angle (°)
A1479-1B/SURSYGW/ S530-A3	5	● Hyper Red / ● Super Yellow Green	Round	624 / 573	White Diffused	25 / 50 16 / 32	2.0 / 2.4 2.0 / 2.4	100



UNIT : mm

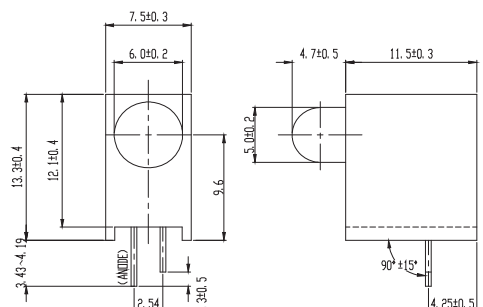


Product	Size (mm)	Color	Lens Type	λ_d (nm)/ CIE(x,y)	Resin Color	I_v (Min/Typ/Max)	V_F (Min/Typ/Max)	Viewing Angle (°)
A203B/SUR/S530-A3	5	● Hyper Red	Round	624	Color Diffused	100 / 200	2.0 / 2.4	30
A203B/SYG/S530-E2	5	● Super Yellow Green	Round	573	Color Diffused	40 / 80	2.0 / 2.4	45
A203B/UY/S530-A3	5	● Super Yellow	Round	589	Color Diffused	100 / 200	2.0 / 2.4	30


LED Lamps | 5mm Assembly LED




UNIT : mm

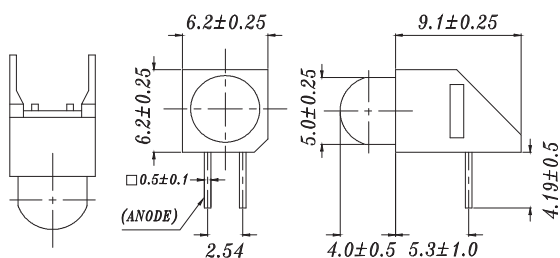

Product	Size (mm)	Color	Lens Type	λ_d (nm)/ CIE(x,y)	Resin Color	I_v (Min/Typ/Max)	V_F (Min/Typ / Max)	Viewing Angle (°)
A253B/SUR/S530-A3	5	● Hyper Red	Round	624	Color Diffused	100 / 200	2.0 / 2.4	30
A253B/SYG/S530-E2	5	● Super Yellow Green	Round	573	Color Diffused	40 / 80	2.0 / 2.4	45

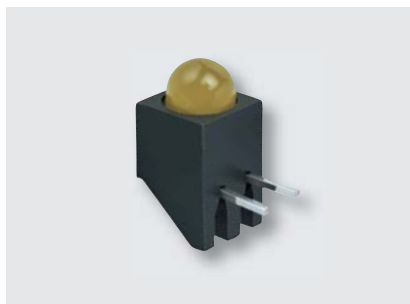

UNIT : mm

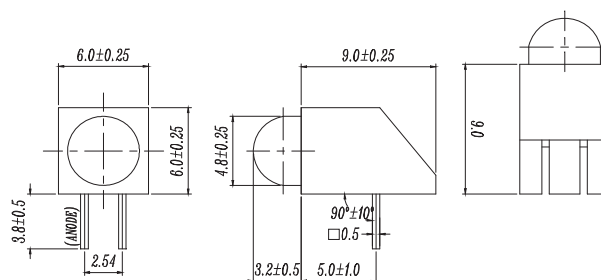


Product	Size (mm)	Color	Lens Type	λ_d (nm)/ CIE(x,y)	Resin Color	I_v (Min/Typ/Max)	V_F (Min/Typ / Max)	Viewing Angle (°)
A93B/SUR/S530-A3	4.7	● Hyper Red	Round	624	Color Diffused	100 / 250	2.0 / 2.4	40

LED Digital Displays | Chip On Board Display | Single Digit Display




UNIT : mm

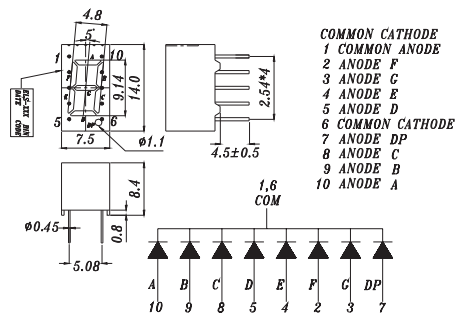

Product	Segement Height mm (inch)	Color	Segement Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
S315SURWA/S530-A3	9.14 (0.3)	Red	4.8	CC	624	White	Gray	4.0/8.0
S315SYGWA/S530-E2	9.14 (0.3)	Green	4.8	CC	573	White	Gray	2.0/3.2




UNIT : mm

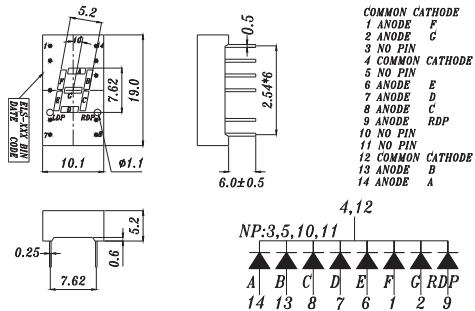

Product	Segement Height mm (inch)	Color	Segement Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
S321SURWA/S530-A3	7.62 (0.3)	Red	5.2	CC	624	White	Gray	4.0/8.9
S321USOWA/S530-A4	7.62 (0.3)	Orange	5.2	CC	615	White	Gray	7.8/17.6
S321SYGWA/S530-E2	7.62 (0.3)	Green	5.2	CC	573	White	Gray	2.8/6.4



UNIT : mm

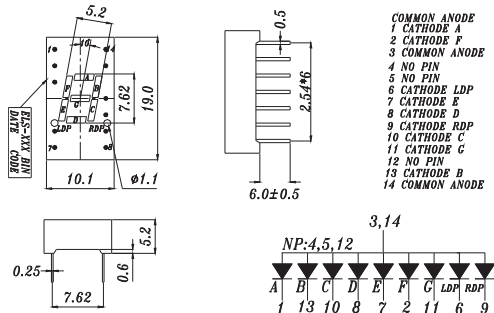


Product	Segement Height mm (inch)	Color	Segement Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
S322SURWA/S530-A3	7.62 (0.3)	Red	5.2	CA	624	White	Gray	5.6/11.0
S322USOWA/S530-A4	7.62 (0.3)	Orange	5.2	CA	615	White	Gray	7.8/17.6
S322SYGWA/S530-E2	7.62 (0.3)	Green	5.2	CA	573	White	Gray	2.0/4.5
S322UBWA/C470	7.62 (0.3)	Blue	5.2	CA	468	White	Gray	7.8/17.6

LED Digital Displays | Chip On Board Display | Single Digit Display




UNIT : mm

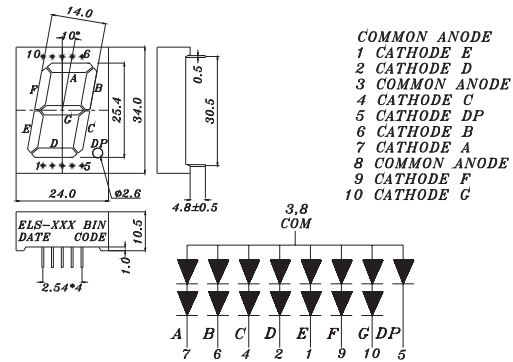


Product	Segment Height mm (inch)	Color	Segment Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
S1006SURWA/S530-A3	25.4 (1)	Red	14	CA	624	White	Gray	15/24




UNIT : mm

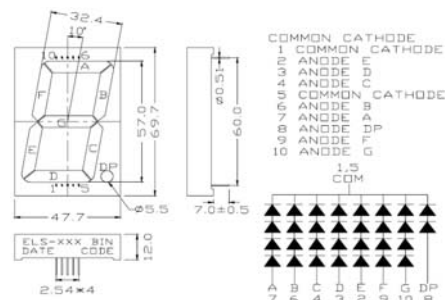

Product	Segment Height mm (inch)	Color	Segment Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
S2325SURWA/S530-A3	57 (2)	Red	32.4	CC	624	White	Gray	15/34

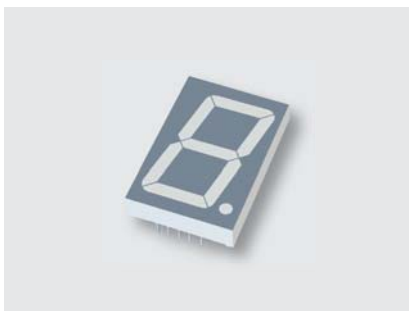


UNIT : mm

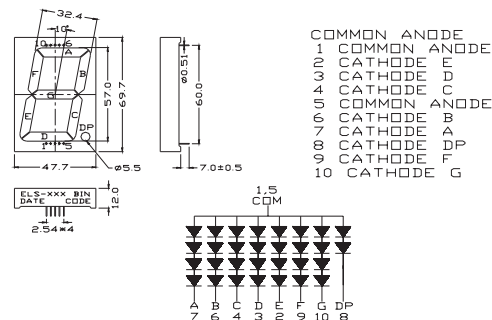


Product	Segment Height mm (inch)	Color	Segment Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
S2326SURWA/S530-A3	57 (2)	Red	32.4	CA	624	White	Gray	15/34
S2326USOWA/S530-A4	57 (2)	Orange	32.4	CA	615	White	Gray	30/67
S2326SYGWA/S530-E2	57 (2)	Green	32.4	CA	573	White	Gray	5.6/ 12.5
S2326UBWA/C470	57 (2)	Blue	32.4	CA	468	White	Gray	15/34


LED Digital Displays | Chip On Board Display | Single Digit Display

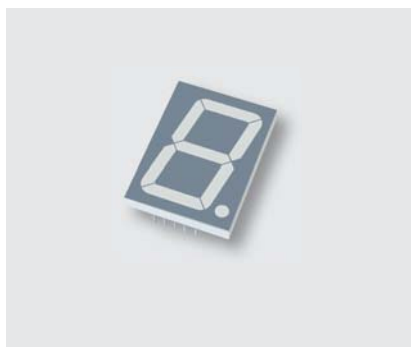


UNIT : mm

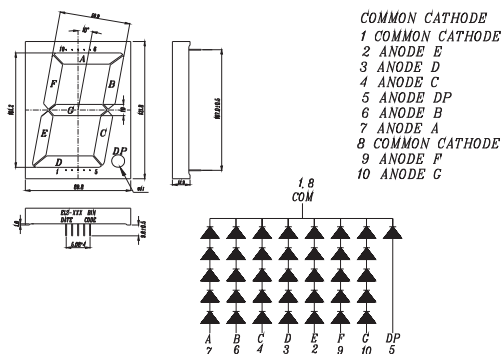

Product	Segment Height mm (inch)	Color	Segment Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
S4005USOWA/S530-A3	101.2 (4)	Orange	59.9	CC	615	White	Gray	15 / 34
S4005SYGWA/S530-E2	101.2 (4)	Green	59.9	CC	573	White	Gray	4.0 / 6.4

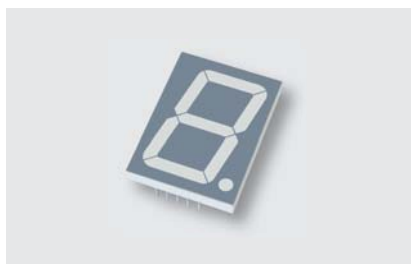

UNIT : mm

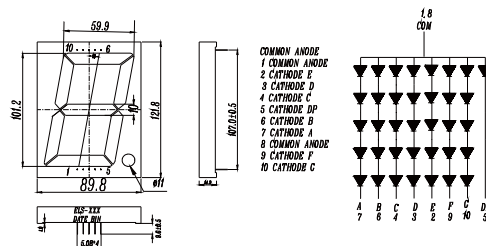


Product	Segment Height mm (inch)	Color	Segment Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
S4006SURWA/S530-A3	101.2 (4)	Red	59.9	CA	624	White	Gray	15 / 34
S4006USOWA/S530-A4	101.2 (4)	Orange	59.9	CA	615	White	Gray	15 / 34

LED Digital Displays | Chip On Board Display | Dual Digit Display




UNIT : mm

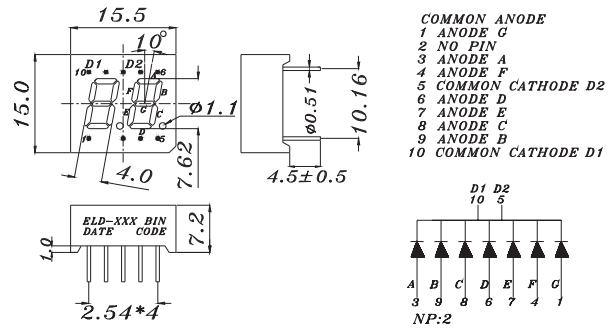


Product	Segement Height mm (inch)	Color	Segement Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
D305SURWA/S530-A3	7.62 (0.3)	Red	4	CC	624	White	Gray	4.0/6.4




UNIT : mm

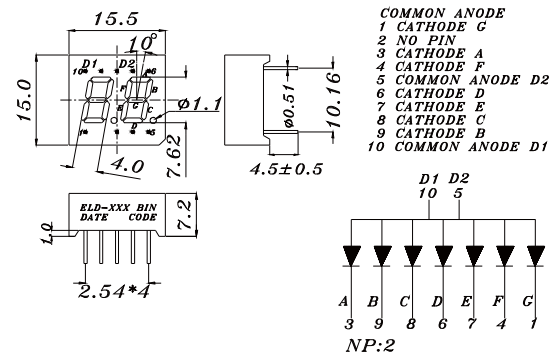

Product	Segement Height mm (inch)	Color	Segement Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
D306SURWA/S530-A3	7.62 (0.3)	Red	4	CA	624	White	Gray	4.0/6.4

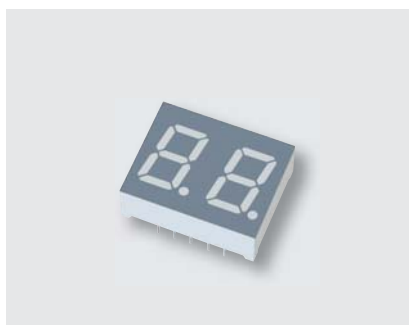

UNIT : mm

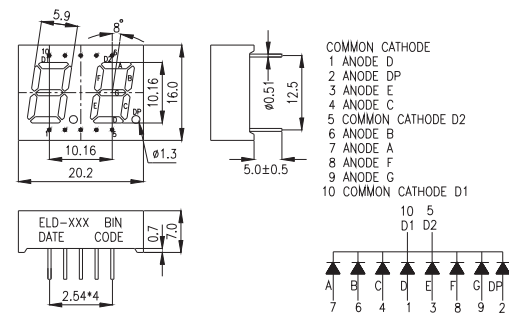


Product	Segement Height mm (inch)	Color	Segement Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
D425SURWA/S530-A3	10.16 (0.4)	Red	5.9	CC	624	White	Gray	7.8/15.0
D425USOWA/S530-A4	10.16 (0.4)	Orange	5.9	CC	615	White	Gray	11.0/24.0
D425YGWA/S530-E2	10.16 (0.4)	Green	5.9	CC	573	White	Gray	2.0/3.2

LED Digital Displays | Chip On Board Display | Dual Digit Display




UNIT : mm

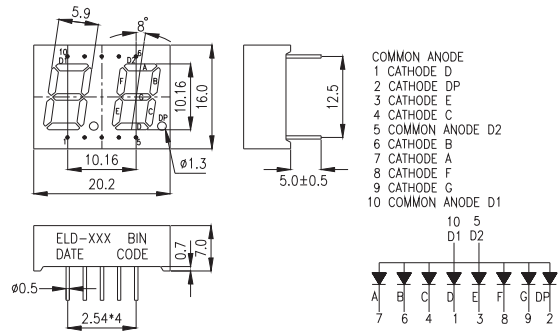

Product	Segement Height mm (inch)	Color	Segement Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
D426SURWB/S530-A3	10.16 (0.4)	Red	5.9	CA	624	White	Black	7.8 / 15
D426USOWA/S530-A3	10.16 (0.4)	Orange	5.9	CA	615	White	Gray	11.0 / 24.0
D426UYOWB/S530-A3	10.16 (0.4)	Brilliant Orange	5.9	CA	589	White	Black	5.6 / 12.5
D426SYGWA/S530-E2	10.16 (0.4)	Green	5.9	CA	573	White	Gray	2.0 / 3.2




UNIT : mm

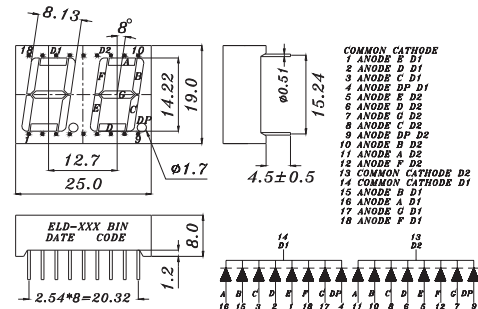

Product	Segement Height mm (inch)	Color	Segement Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
D511SURWB/S530-A3	14.22 (0.5)	Red	8.13	CC	624	White	Black	7.8 / 15.0



UNIT : mm

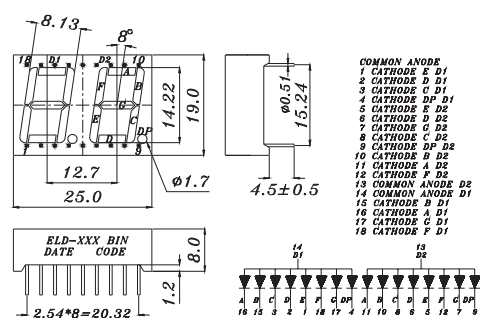


Product	Segement Height mm (inch)	Color	Segement Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
D512SURWB/S530-A3	14.22 (0.5)	Red	8.13	CA	624	White	Black	7.8 / 15.0
D512UBWA/C470	14.22 (0.5)	Blue	8.13	CA	470	White	Gray	4.0 / 6.4

LED Digital Displays | Chip On Board Display | Dual Digit Display




UNIT : mm

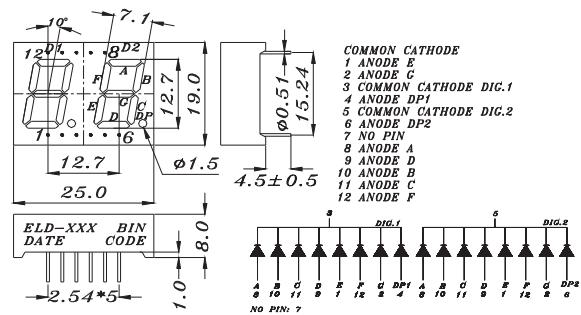

Product	Segement Height mm (inch)	Color	Segement Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
D515SURWA/S530-A3	12.7 (0.5)	Red	7.1	CC	624	White	Gray	7.8/15.0




UNIT : mm

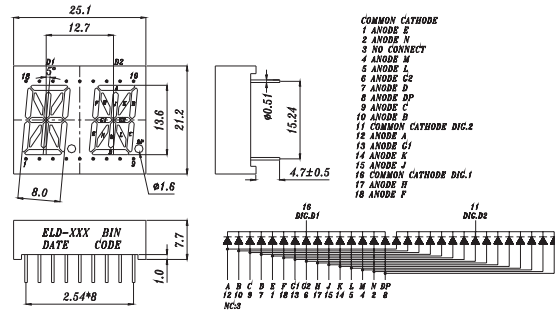

Product	Segement Height mm (inch)	Color	Segement Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
D525SURWA/S530-A3	13.6 (0.5)	Red	8	CC	624	White	Gray	7.8/12.5
D525SYGWA/S530-E2	13.6 (0.5)	Green	8	CC	573	White	Gray	2.8/4.5
D525USOWA/S530-A3	13.6 (0.5)	Orange	8	CC	615	White	Gray	5.6/12.5



UNIT : mm


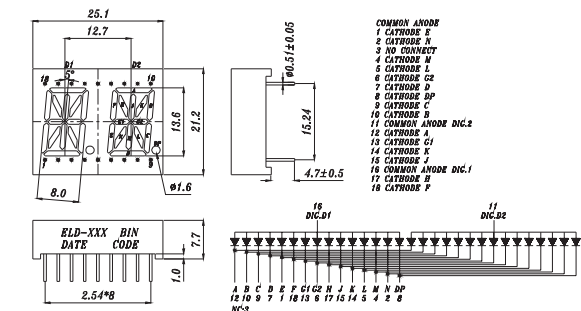


Product	Segement Height mm (inch)	Color	Segement Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
D526SURWA/S530-A3	13.6 (0.5)	Red	8	CA	624	White	Gray	7.8/12.5


LED Digital Displays | Chip On Board Display | Three Digit Display



UNIT : mm





COMMON CATHODE
1 ANODE E
2 ANODE D
3 ANODE DP
4 ANODE C
5 ANODE G
6 NO PIN
7 ANODE B
8 COMMON CATHODE DIG.3
9 COMMON CATHODE DIG.2
10 ANODE F
11 ANODE A
12 COMMON CATHODE DIG.1




Product	Segment Height mm (inch)	Color	Segment Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
T315SYGWA/S530-E2	9.2 (0.3)	● Green	4.8	CC	573	White	Gray	1.4 / 3.2



UNIT : mm





COMMON ANODE
1 CATHODE E
2 CATHODE D
3 CATHODE DP
4 CATHODE C
5 CATHODE G
6 NO PIN
7 CATHODE B
8 COMMON ANODE D3
9 COMMON ANODE D2
10 CATHODE F
11 CATHODE A
12 COMMON ANODE D1




Product	Segment Height mm (inch)	Color	Segment Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
T316SURWA/S530-A3	9.2 (0.3)	● Red	4.8	CA	624	White	Gray	5.6 / 11.0
T316SYGWA/S530-E2	9.2 (0.3)	● Green	4.8	CA	573	White	Gray	1.4 / 3.2



UNIT : mm



COMMON CATHODE
1 ANODE E
2 ANODE D
3 ANODE DP
4 ANODE C
5 ANODE G
6 NO CONNECT
7 ANODE B
8 COMMON CATHODE D3
9 COMMON CATHODE D2
10 ANODE F
11 ANODE A
12 COMMON CATHODE D1





Product	Segment Height mm (inch)	Color	Segment Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
T511SURWA/S530-A3	14.22 (0.5)	● Red	8.13	CC	624	White	Gray	7.8 / 17.6
T511SYGWA/S530-E2	14.22 (0.5)	● Green	8.13	CC	573	White	Gray	2.8 / 4.5
T511UYOWA/S530-A3	14.22 (0.5)	● Brilliant Orange	8.13	CC	589	White	Gray	5.6 / 12.5


LED Digital Displays | Chip On Board Display | Three Digit Display



UNIT : mm



COMMON ANODE
1 CATHODE E
2 CATHODE D
3 CATHODE DP
4 CATHODE C
5 CATHODE G
6 NO CONNECT
7 CATHODE B
8 COMMON ANODE D3
9 COMMON ANODE D2
10 CATHODE F
11 CATHODE A
12 COMMON ANODE D1




Product	Segment Height mm (inch)	Color	Segment Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
T512SURWA/S530-A3	14.22 (0.5)	Red	8.13	CA	624	White	Gray	7.8 / 17.6
T512SYGWA/S530-E2	14.22 (0.5)	Green	8.13	CA	573	White	Gray	2.8 / 4.5
T512UYOWA/S530-A3	14.22 (0.5)	Brilliant Orange	8.13	CA	589	White	Gray	5.6 / 12.5


LED Digital Display | Chip On Board Display | Four Digit Display



UNIT : mm



COMMON CATHODE
1 COMMON CATHODE D1
2 COMMON CATHODE D2
3 ANODE D
4 COMMON CATHODE L1,L2
5 ANODE E
6 COMMON CATHODE D3
7 ANODE DP
8 COMMON CATHODE D4
9 ANODE L3
10 CATHODE L3
11 ANODE F
12 ANODE L1,L2
13 ANODE C
14 ANODE A
15 ANODE G
16 ANODE B




Product	Segment Height mm (inch)	Color	Segment Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
F415SURWA/S530-A3	10 (0.4)	Red	6	CC	624	White	Gray	5.6 / 8.9

LED Digital Displays | Chip On Board Display | Four Digit Display




UNIT : mm

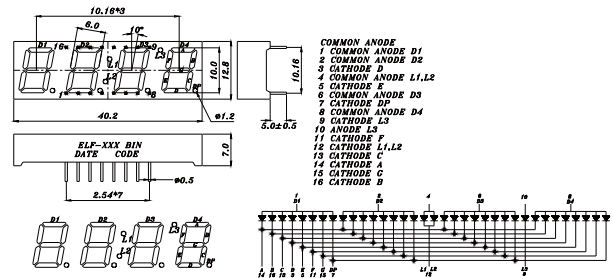

Product	Segment Height mm (inch)	Color	Segment Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
F416SYGWA/S530-E3	10 (0.4)	● Green	6	CA	573	White	Gray	4.0/8.9
F416SURWA/S530-A3/S685	10 (0.4)	● Red	6	CA	635	White	Gray	5.6/8.9




UNIT : mm

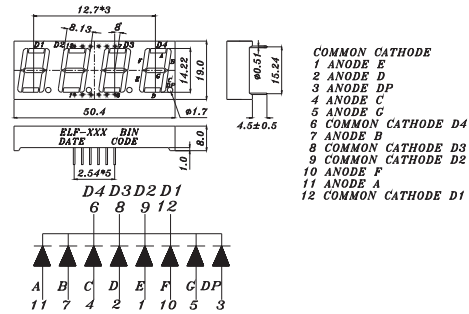

Product	Segment Height mm (inch)	Color	Segment Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
F511SURWA/S530-A3	14.22 (0.5)	● Red	8.13	CC	624	White	Gray	7.8/15.0
F511SYGWA/S530-E2	14.22 (0.5)	● Green	8.13	CC	573	White	Gray	4.0/4.5




UNIT : mm

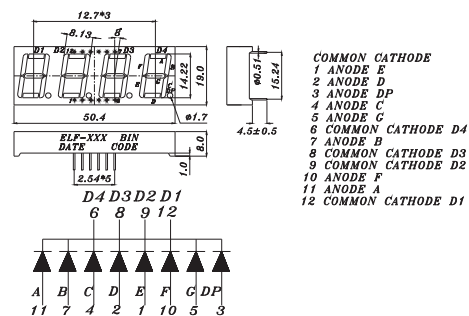


Product	Segment Height mm (inch)	Color	Segment Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
F512SURWA/S530-A3	14.22 (0.5)	● Red	8.13	CA	624	White	Gray	7.8/15.0
F512SYGWA/S530-E2	14.22 (0.5)	● Green	8.13	CA	573	White	Gray	2.8 4.5


LED Digital Displays | SMD Display | Single Digit Display

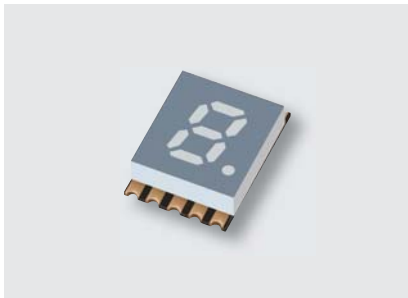


UNIT : mm

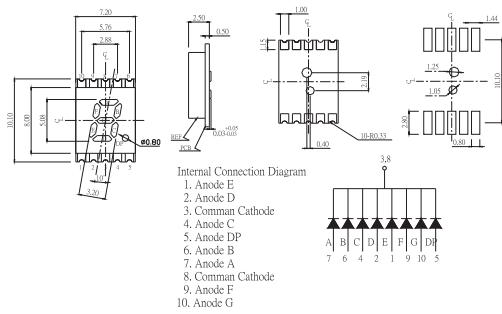


Product	Segement Height mm (inch)	Color	Segement Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
SS205SURWA/S530-A3/S290	5.08 (0.2)	Red	3.2	CC	624	White	Gray	5.6 / 13.7
SS205UYOWA/S530-A3/S290	5.08 (0.2)	Orange	3.2	CC	605	White	Gray	7.8 / 13.3
SS205UYWA/S530-A3/S290	5.08 (0.2)	Yellow	3.2	CC	588	White	Gray	7.8 / 16.3
SS205SYGWA/S530-E2/S290	5.08 (0.2)	Green	3.2	CC	573	White	Gray	4.0 / 11.5

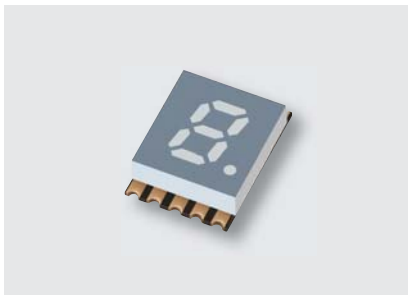


UNIT : mm

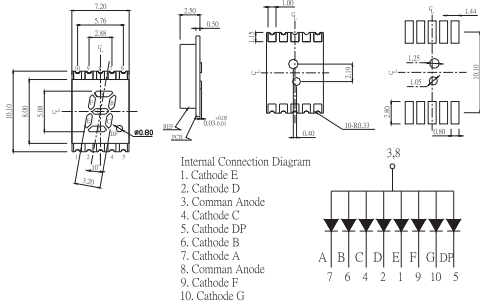

Product	Segement Height mm (inch)	Color	Segement Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
SS206SURWA/S530-A3/S290	5.08 (0.2)	Red	3.2	CA	624	White	Gray	5.6 / 13.7
SS206UYWA/S530-A3/S290	5.08 (0.2)	Yellow	3.2	CA	588	White	Gray	7.8 / 16.3

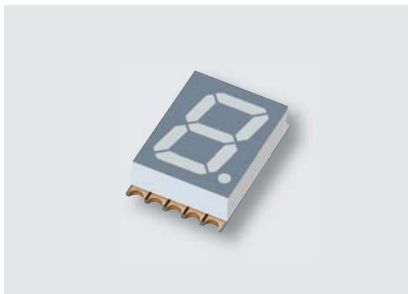


UNIT : mm

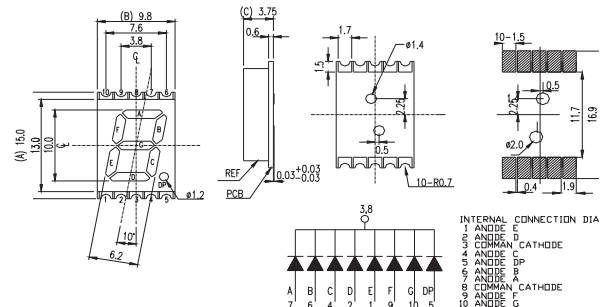


Product	Segement Height mm (inch)	Color	Segement Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
SS405SURWB/S530-A3/S290	10 (0.4)	Red	6.2	CC	624	White	Black	7.8 / 16.5


LED Digital Displays | SMD Display | Single Digit Display

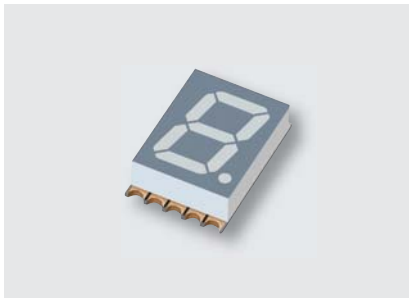


UNIT : mm

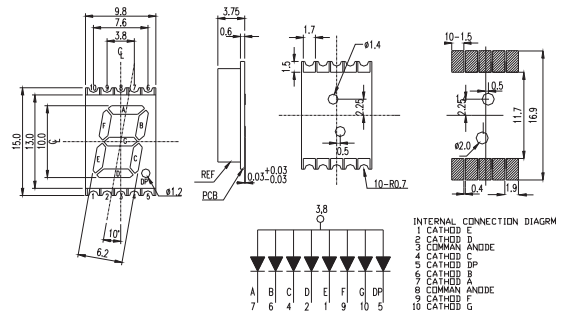


Product	Segement Height mm (inch)	Color	Segement Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
SS406SURWA/S530-A3/S290	10 (0.4)	● Red	6.2	CA	624	White	Gray	7.8/6.5

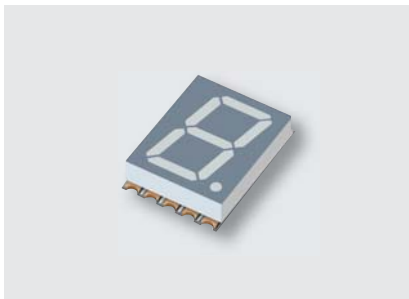


UNIT : mm

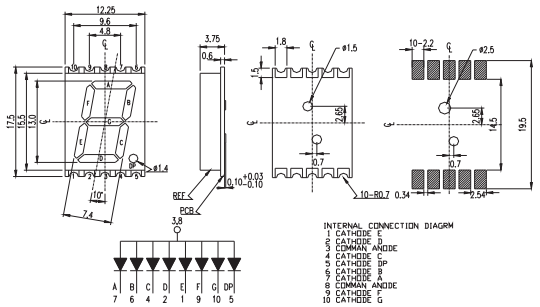

Product	Segement Height mm (inch)	Color	Segement Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
S506SYGWA/S530-E2	13.0 (0.5)	● Green	7.4	CA	573	White	Gray	5.6/9.1

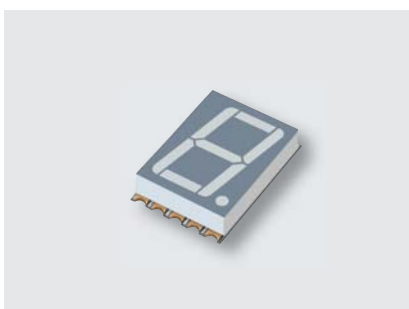


UNIT : mm

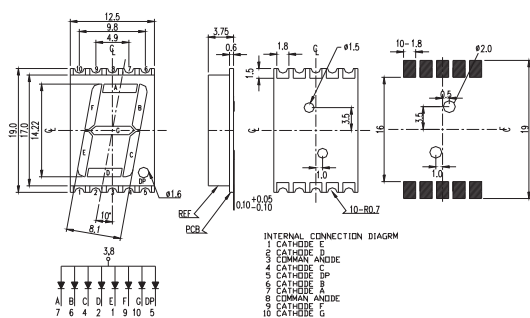


Product	Segement Height mm (inch)	Color	Segement Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
SS511SURWA/S530-A3/S290	14.22 (0.5)	● Red	8.1	CC	624	White	Gray	15 / 23
SS511SYGWA/S530-E2/S290	14.22 (0.5)	● Green	8.1	CC	573	White	Gray	4.0 / 10.8

LED Digital Displays | SMD Display | Single Digit Display

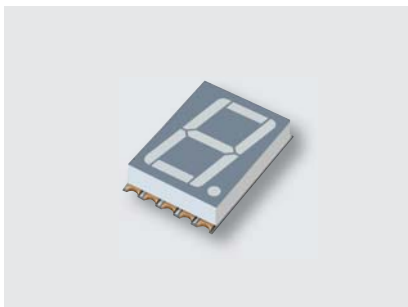


UNIT : mm

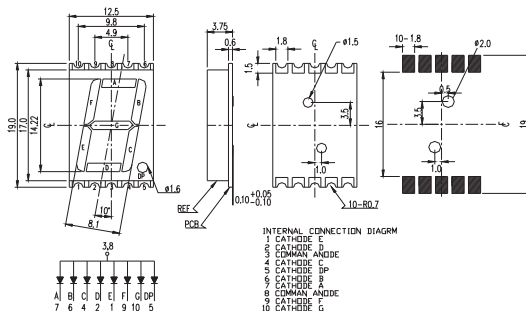


Product	Segment Height mm (inch)	Color	Segment Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
SS512SURWA/S530-A3/S290	14.22 (0.5)	Red	8.1	CA	624	White	Gray	15 / 23
SS512UBWA/C470/S290	14.22 (0.5)	Blue	8.1	CA	468	White	Gray	3.0 / 3.7


LED Digital Display | SMD Display | Dual Digit Display

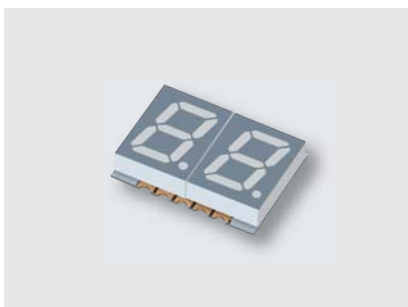


UNIT : mm

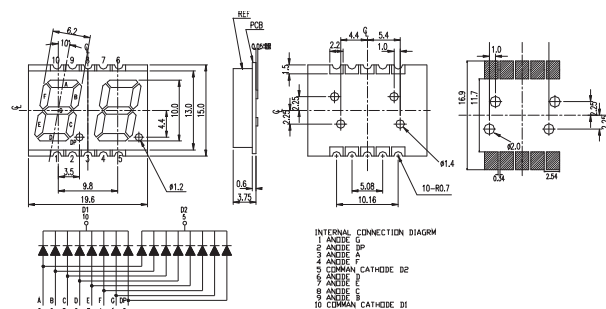

Product	Segment Height mm (inch)	Color	Segment Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
SD405SURWA/S530-A3/S290	10 (0.4)	Red	6.2	CC	624	White	Gray	7.8 / 17.10

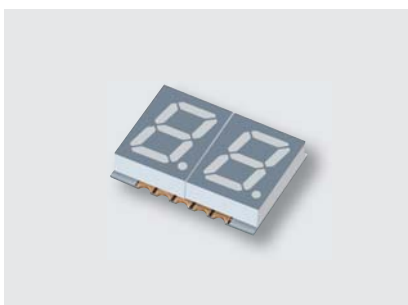

UNIT : mm

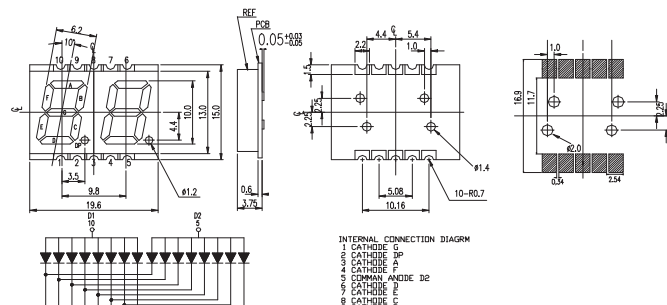


Product	Segment Height mm (inch)	Color	Segment Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
SD406SURWA/S530-A4/S290	10 (0.4)	Red	6.2	CA	624	White	Gray	7.8 16.2
SD406SYGWA/S530-E2/S290	10 (0.4)	Green	6.2	CA	573	White	Gray	5.60 / 10.2


LED Digital Displays | SMD Display | Dual Digit Display




UNIT : mm

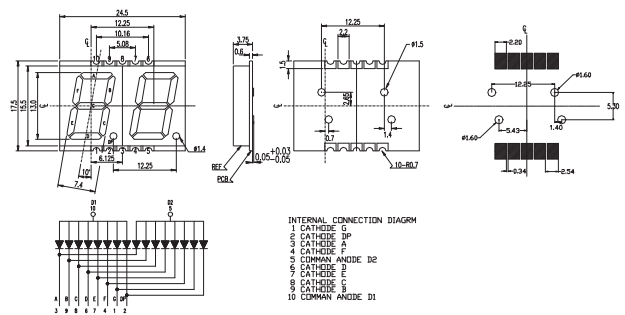


Product	Segement Height mm (inch)	Color	Segement Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
SD506SURWA/S530-A4/S290	13 (0.5)	● Red	7.4	CA	624	White	Gray	7.8 / 15.0

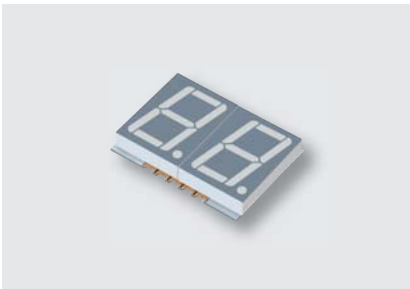


UNIT : mm

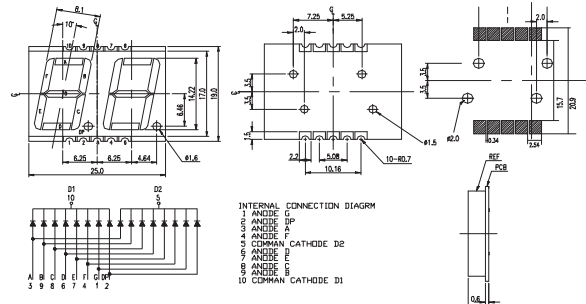

Product	Segement Height mm (inch)	Color	Segement Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
SD511SYGWA/S530-E2/S290	14.22 (0.5)	● Green	8.1	CC	573	White	Gray	5.6/ 11.12

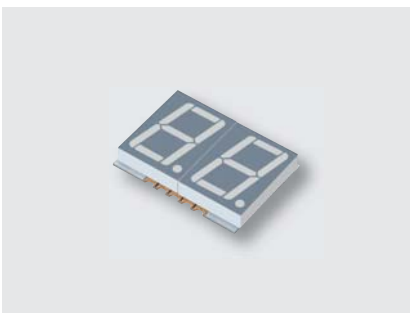

UNIT : mm

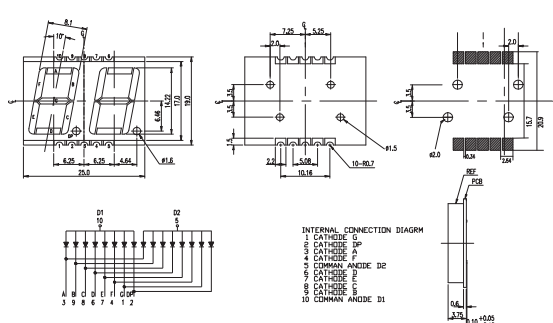


Product	Segement Height mm (inch)	Color	Segement Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
SD512SYGWA/S530-E2/S290	14.22 (0.5)	● Green	8.1	CA	573	White	Gray	4.0 / 13.35

LED Digital Displays | SMD Display | Three Digit Display




UNIT : mm

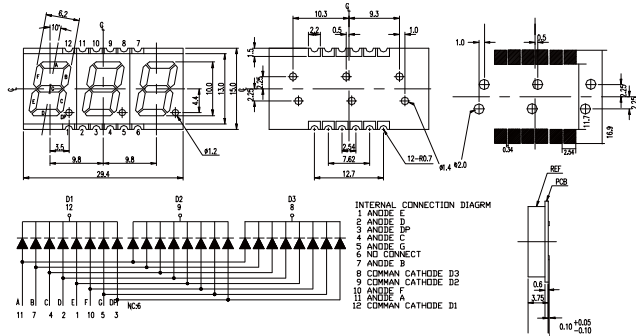

Product	Segment Height mm (inch)	Color	Segment Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
ST405SURWA/S530-A3/S290	10 (0.4)	● Red	6.2	CC	624	White	Gray	7.8 / 16.40




UNIT : mm

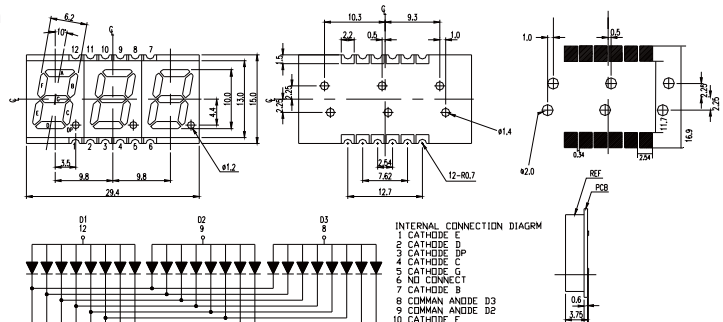

Product	Segment Height mm (inch)	Color	Segment Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
ST406SURWA/S530-A3/S290	10 (0.4)	● Red	6.2	CA	624	White	Gray	7.8 / 16.40



UNIT : mm

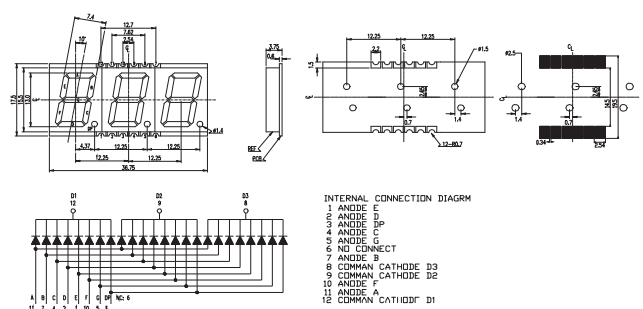


Product	Segment Height mm (inch)	Color	Segment Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
ST505SYGWA/S530-E2/S290	13 (0.5)	● Green	7.4	CC	573	White	Gray	4.0 / 9.6

LED Digital Displays | SMD Display | Three Digit Display




UNIT : mm

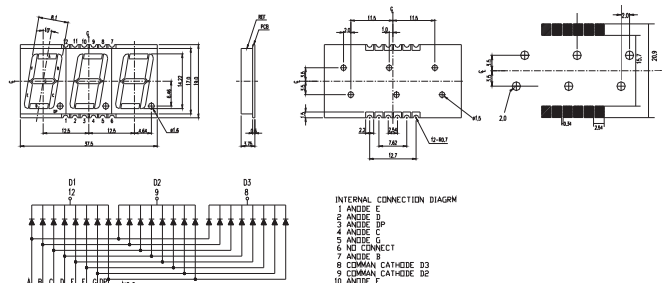

Product	Segment Height mm (inch)	Color	Segment Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
ST511SYGWA/S530-E2/S290	14.22 (0.5)	● Green	7.4	CC	573	White	Gray	4.0 / 9.6



UNIT : mm

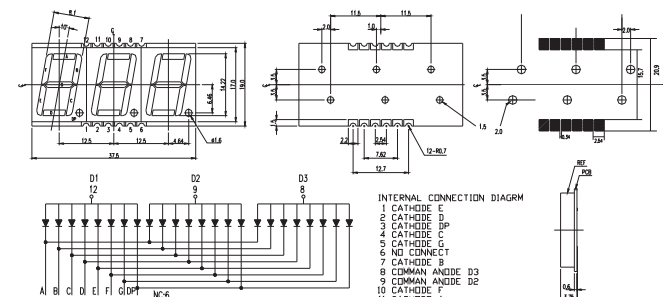


Product	Segment Height mm (inch)	Color	Segment Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
ST512SURWA/S530-A3/S290	14.22 (0.5)	● Red	7.4	CA	624	White	Gray	11.0 / 21.6
ST512SYGWA/S530-E2/S290	14.22 (0.5)	● Green	7.4	CA	573	White	Gray	7.8 / 16.4

LED Digital Displays | SMD Display | Four Digit Display




UNIT : mm

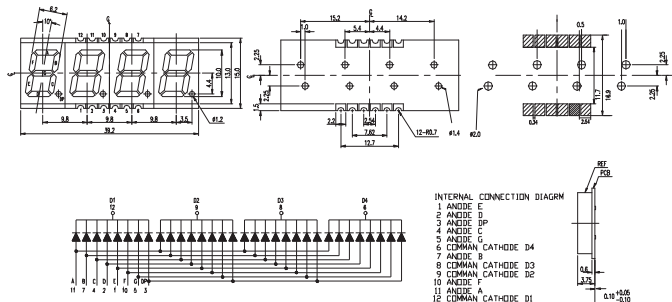

Product	Segment Height mm (inch)	Color	Segment Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
SF405SURWA/S530-A3/S290	10 (0.4)	Red	6.2	CC	624	White	Gray	7.8 / 16.40
SF405SYGWA/S530-E2/S290	10 (0.4)	Green	6.2	CC	573	White	Gray	5.6 / 12.52




UNIT : mm

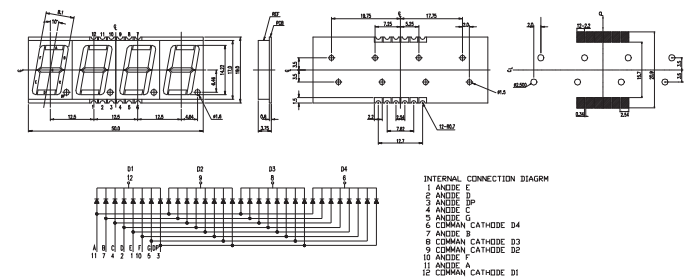

Product	Segment Height mm (inch)	Color	Segment Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
SF511SURWA/S530-A3/S290	14.22 (0.5)	Red	8.1	CC	624	White	Gray	11.0 / 23.4



UNIT : mm

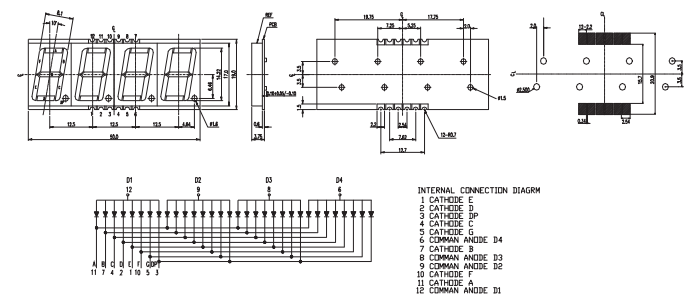


Product	Segment Height mm (inch)	Color	Segment Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
SF512SURWA/S530-A3/S290	14.22 (0.5)	Red	8.1	CA	624	White	Gray	11.0 / 27.8
SF512SYGWA/S530-E2/S290	14.22 (0.5)	Green	8.1	CA	573	White	Gray	4.0 / 10.8

LED Digital Displays | Dot Matrix Display




UNIT : mm

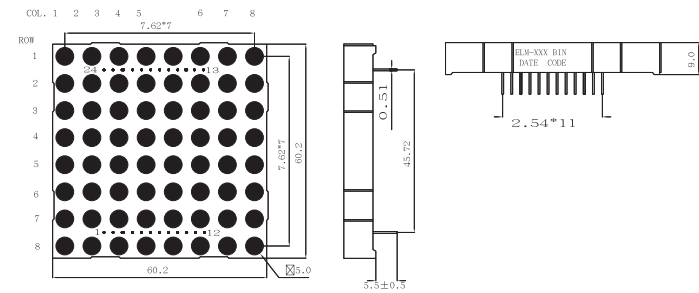

Product	Size (LXWmm)	Color	Segment Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
M2881SURWA/S530-A3	60.2x60.2	Red	--	CC	624	White	Gray	7.8/21.0
M2881SYGWA/S530-E2	60.2x60.2	Green	--	CC	573	White	Gray	7.8/17.6
M2881UYWA/S530-A3	60.2x60.2	Yellow	--	CC	589	White	Gray	11/17.6




UNIT : mm

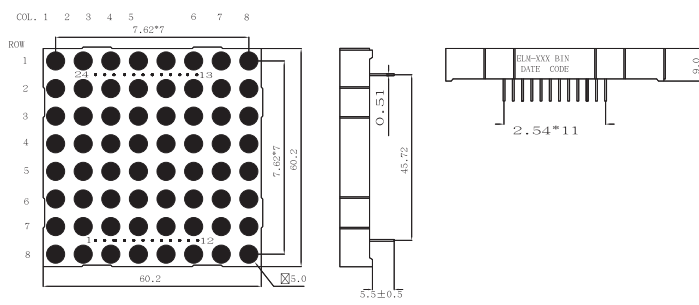


Product	Size (LXWmm)	Color	Segment Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
M2882SYGWA/S530-E2	60.2x60.2	Green	--	CA	573	White	Gray	7.8/17.6


LED Digital Displays | Light Bar Display

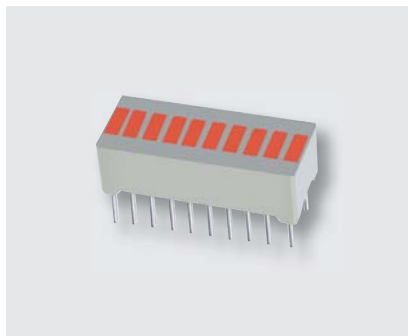


UNIT : mm

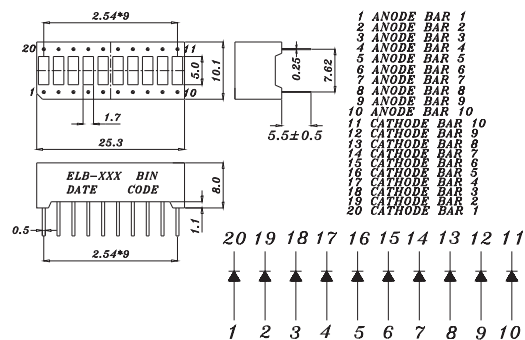

Product	Size (LXWmm)	Color	Segment Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
B1001SDRWB/S530-A3	25.3x10.1	Deep Red	--	CC	639	White	Black	4.0 / 8.9
B1001SURWB/S530-A3	25.3x10.1	Red	--	CC	624	White	Black	5.6 / 12.5
B1001USOWA/S530-A4	25.3x10.1	Orange	--	CC	615	White	Gray	7.8 / 7.6
B1001SYGWA/S530-E2	25.3x10.1	Green	--	CC	573	White	Gray	2.8 / 4.5

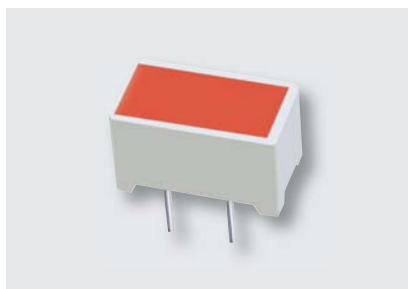

UNIT : mm

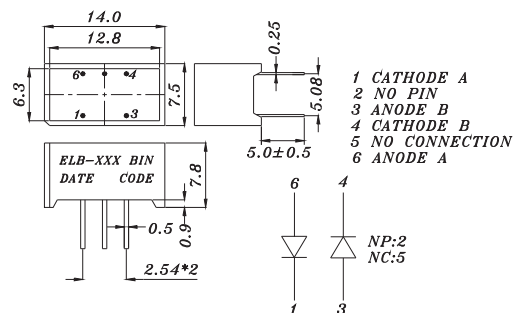


Product	Size (LXWmm)	Color	Segment Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
B1010SURD/S530-A3	14.0x7.5	Red	--	CA	624	Red	Red	11 / 24
B1010SYGD/S530-E2	14.0x7.5	Green	--	CA	573	Red	Red	2.8 / 4.5

Signage LED ■ Surface Mount Chip LED (PCB)




UNIT : mm

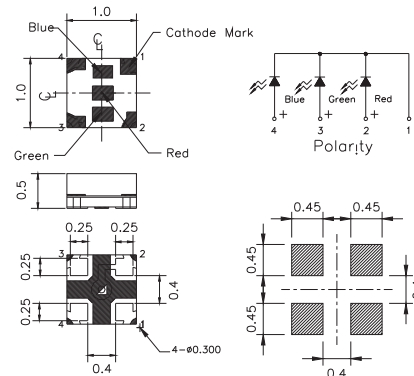

Product	Size (LXWXHmm)	Color	λ_d (nm)	Typ. I_v (mcd)	V_F (V)		I_F (mA)	Viewing Angle (°)
					Typ.	Max.		
18-038/RSGHBHC1-S01/2T	1.0x1.0x0.5 (4-pin)	Red	619-628	165	2.0	2.4	20	120°
		Green	521.5-529	233	3.3	3.7		
		Blue	466-473.5	58	3.3	3.7		




UNIT : mm

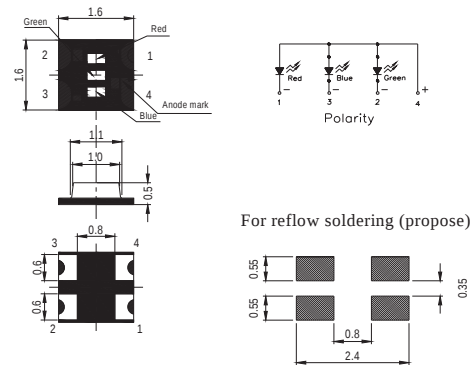

Product	Size (LXWXHmm)	Color	λ_d (nm)	Typ. I_v (mcd)	V_F (V)		I_F (mA)	Viewing Angle (°)
					Typ.	Max.		
19-037A/RSGHBHW1-S01/2T	1.6x1.6x0.5 (4-pin)	Red	619-628	165	2.0	2.4	20	120°
		Green	520-527.5	270	3.3	3.7		
		Blue	463.5-471	80	3.3	3.7		



UNIT : mm

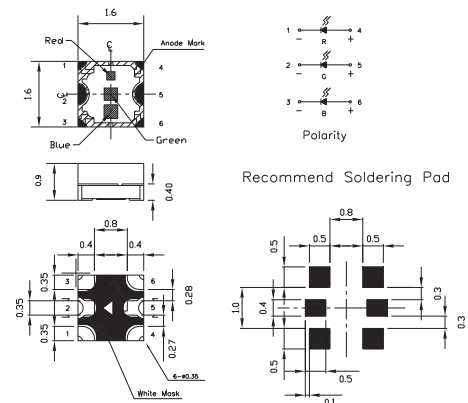


Product	Size (LXWXHmm)	Color	λ_d (nm)	Typ. I_v (mcd)	V_F (V)		I_F (mA)	Viewing Angle (°)
					Typ.	Max.		
19-037R/RSGHBHW1-S01/2T	1.6x1.6x0.9 (6-pin)	Red	619-628	165	2.0	2.4	20	120°
		Green	520-527.5	270	3.3	3.7		
		Blue	463.5-471	80	3.3	3.7		

Signage LED | Surface Mount PLCC LED (Reflector)



UNIT : mm

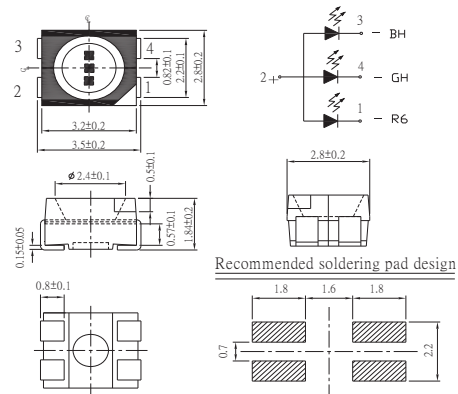


Product	Size (LXWXHmm)	Color	λ_d (nm)	Typ. I_v (mcd)	V_F (V)		I_F (mA)	Viewing Angle (°)
					Typ.	Max.		
67-03A/R6GHBHW-A01/2T/MS	3.5x2.8x1.8	Red	620-627.5	220	2.0	2.5	20	120°
		Green	517-532	1000	3.2	3.7		
		Blue	464.5-474.5	220	3.2	3.7		



PRELIMINARY

UNIT : mm

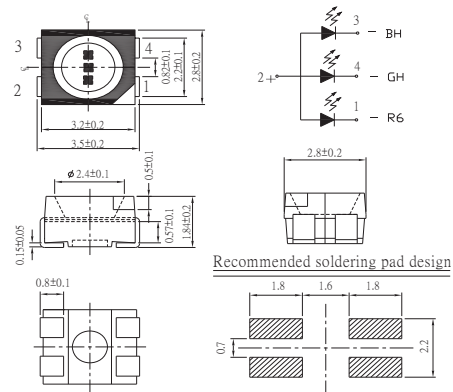


Product	Size (LXWXHmm)	Color	λ_d (nm)	Typ. I_v (mcd)	V_F (V)		I_F (mA)	Viewing Angle (°)
					Typ.	Max.		
67-B23A/R6GHB7W-S01/2T/MS	3.5x2.8x1.8	Red	620-627.5	300	2.0	2.5	20	120°
		Green	515-530	500	3.2	3.7		
		Blue	465-475	160	3.2	3.7		

• Product Availability : Please visit EVERLIGHT website for more updated information (www.everlight.com) or contact EVERLIGHT sales for regional options.



PRELIMINARY

UNIT : mm

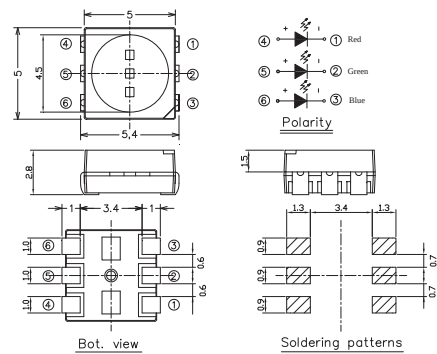

Product	Size (LXWXHmm)	Color	λ_d (nm)	Typ. I_v (mcd)	V_F (V)		I_F (mA)	Viewing Angle (°)
					Typ.	Max.		
HN0507	5.0x5.0x2.8	Red	620-629	625	2.0	2.5	20	120°
		Green	520-530	1530	3.2	3.7		
		Blue	463.5-473.5	337	3.2	3.7		


• Product Availability : Please visit EVERLIGHT website for more updated information (www.everlight.com) or contact EVERLIGHT sales for regional options.

Signage LED | Surface Mount PLCC LED (Reflector)

PRELIMINARY



UNIT : mm

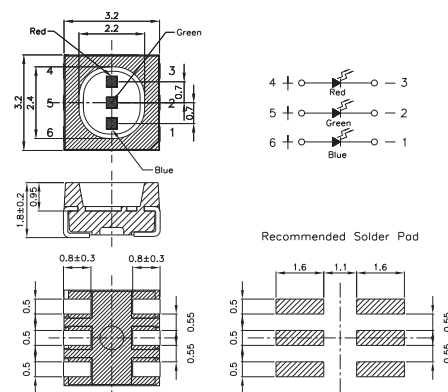


Product	Size (LXWXHmm)	Color	λ_d (nm)	Typ. I_v (mcd)	V_F (V)		I_F (mA)	Viewing Angle (°)
					Typ.	Max.		
HNB325	3.2x3.2x1.8	Red	620.5-627	330	2.0	2.5	20	120°
		Green	524.5-533	730	3.2	3.7		
		Blue	465.5-473	170	3.2	3.7		

• Product Availability : Please visit EVERLIGHT website for more updated information (www.everlight.com) or contact EVERLIGHT sales for regional options.



UNIT : mm

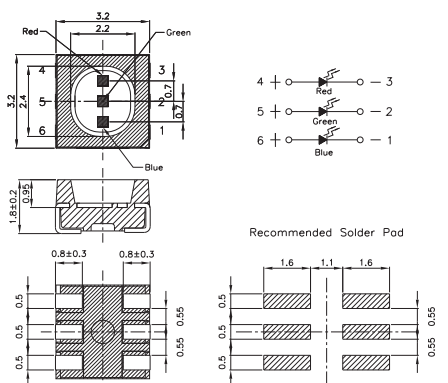


Product	Size (LXWXHmm)	Color	λ_d (nm)	Typ. I_v (mcd)	V_F (V)		I_F (mA)	Viewing Angle (°)
					Typ.	Max.		
HN0325	3.2x3.2x1.8	Red	620-629	625	2.0	2.5	20	120°
		Green	520-530	1530	3.2	3.7		
		Blue	463.5-473.5	337	3.2	3.7		


Signage LED | Lamp Type LED | 5mm Round Type




UNIT : mm

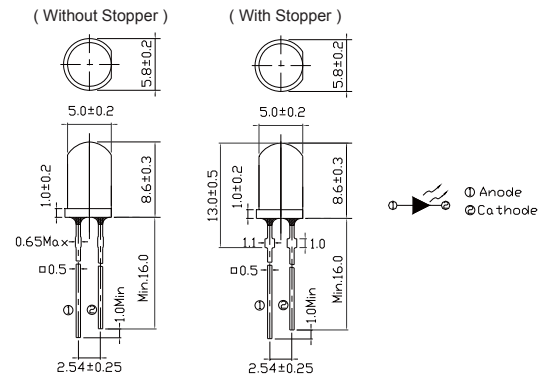

Product	Size (LXWXHmm)	Color	Lens Type	λ_d (nm)	Typ. I_v (mcd)	V_F (V)		I_F (mA)	Viewing Angle (°)
						Typ.	Max.		
333/R7C1-AUWB/X/MS	5.0x5.0x8.6	Red	Clear	619-628	11250	2.0	2.6	20	10°
333/Y7C1-ATWB/X/MS	5.0x5.0x8.6	Yellow	Clear	586-594	11250	2.0	2.6	20	15°
333/G1C1-AWYA/MS	5.0x5.0x8.6	Green	Clear	525-535	18000	3.2	3.6	20	15°
333/B1C1-ARUA/MS	5.0x5.0x8.6	Blue	Clear	465-475	7150	3.2	3.6	20	15°

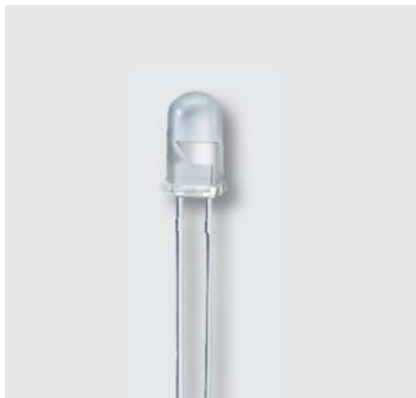


UNIT : mm

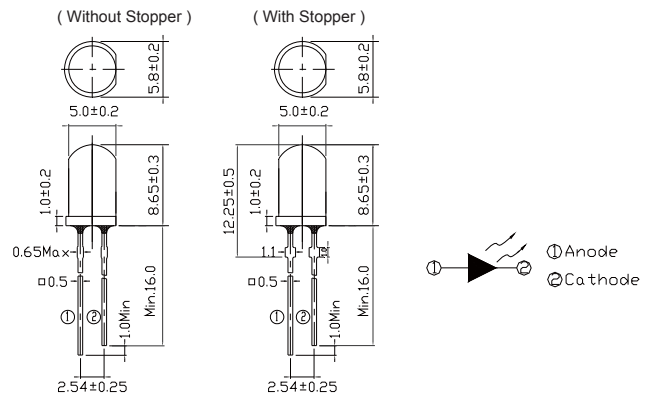


Product	Size (LXWXHmm)	Color	Lens Type	λ_d (nm)	Typ. I_v (mcd)	V_F (V)		I_F (mA)	Viewing Angle (°)
						Typ.	Max.		
7383/R7C3-AQSB/X/MS	5.0x5.0x8.7	Red	Clear	619-628	4000	2.0	2.6	20	30°
7383/R7C3-ARUB/X/MS	5.0x5.0x8.7	Red	Clear	619-628	7150	2.0	2.6	20	30°
7383/Y7C3-AQSB/X/MS	5.0x5.0x8.7	Yellow	Clear	586-594	4500	2.0	2.6	20	30°
7383/Y7C3-ARUB/X/MS	5.0x5.0x8.7	Yellow	Clear	586-594	7150	2.0	2.6	20	30°
7383/G1C3-ATVA/X/MS	5.0x5.0x8.7	Green	Clear	525-535	9000	3.2	3.6	20	30°
7383/V7C3-ARTA/X/MS	5.0x5.0x8.7	Green	Clear	505	6300	3.2	3.6	20	30°
7383/BAC3-ANQA/X/MS	5.0x5.0x8.7	Blue	Clear	465-475	3600	3.2	3.6	20	30°
7343/R7D5-AHKB/X/MS	5.0x5.0x8.7	Red	Diffused	619-628	900	2.2	2.6	20	55°
7343/GAD5-ANQA/X/MS	5.0x5.0x8.7	Green	Diffused	525-535	2850	3.2	3.6	20	50°
7343/BAD5-AGJA/X/MS	5.0x5.0x8.7	Blue	Diffused	465-475	715	3.2	3.6	20	50°
7343/R7C2-AQSB/X/MS	5.0x5.0x8.7	Red	Clear	619-628	4500	2.0	2.6	20	25°
7343/Y7C2-AQSB/X/MS	5.0x5.0x8.7	Yellow	Clear	586-594	4500	2.0	2.6	20	25°
7344/V7C2-ASVA/X/MS	5.0x5.0x8.7	Green	Clear	505	9000	3.2	3.6	20	23°

Signage LED ■ Lamp Type LED ■ 3mm Oval Type

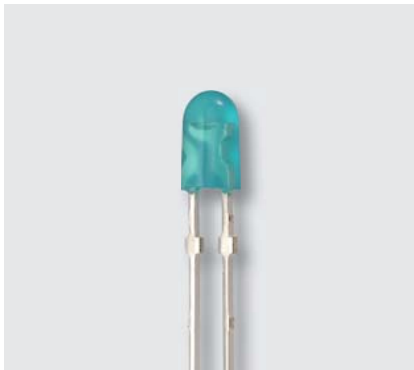


UNIT : mm

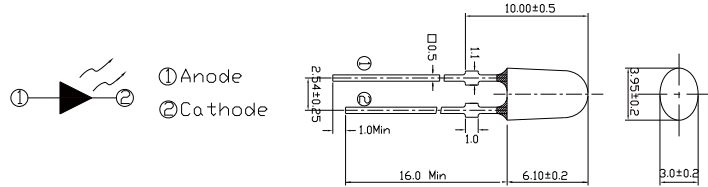


Product	Size (LXWXHmm)	Color	Lens Type	λ_d (nm)	Typ. I_v (mcd)	V_F (V)		I_F (mA)	Viewing Angle (°)
						Typ.	Max.		
3474BHRR	3.95x3.0x6.1	Red	Oval	619-626	1150	2.0	2.6	20	110°/60°
3474BHGR	3.95x3.0x6.1	Green	Oval	526.5-531.5	2820	3.2	3.6	20	110°/60°
3474BHBR	3.95x3.0x6.1	Blue	Oval	468-474	950	3.2	3.6	20	110°/60°
*3474KHRR	3.95x3.0x6.1	Red	Oval	620-626	1300	2.0	2.6	20	110°/60°
*3474KHGR	3.95x3.0x6.1	Green	Oval	525-534	3400	3.2	3.6	20	110°/60°
*3474KHBR	3.95x3.0x6.1	Blue	Oval	465-474	750	3.2	3.6	20	110°/60°
3474AHRR	3.95x3.0x6.1	Red	Oval	620-626	1600	2.0	2.6	20	110°/50°
3474AHGR	3.95x3.0x6.1	Green	Oval	525-534	3700	3.2	3.6	20	110°/50°
3474AHBR	3.95x3.0x6.1	Blue	Oval	465-474	1030	3.2	3.6	20	110°/50°
3474ALRR	3.95x3.0x6.1	Red	Oval	620-626	1220	2.0	2.6	20	110°/45°
3474ALGR	3.95x3.0x6.1	Green	Oval	525-534	2880	3.2	3.6	20	110°/50°
3474ALBR	3.95x3.0x6.1	Blue	Oval	465-474	720	3.2	3.6	20	110°/50°
*3474DHRR	3.95x3.0x6.1	Red	Oval	620-626	1900	2.0	2.6	20	90°/45°
*3474DHGR	3.95x3.0x6.1	Green	Oval	525-534	4500	3.2	3.6	20	90°/45°
*3474DHBR	3.95x3.0x6.1	Blue	Oval	465-474	1100	3.2	3.6	20	90°/45°
*3474FHRR	3.95x3.0x6.1	Red	Oval	620-630	1420	2.0	2.6	20	105°/50°
*3474FLRR	3.95x3.0x6.1	Red	Oval	620-630	660	2.0	2.6	20	105°/50°
*3474FLGR	3.95x3.0x6.1	Green	Oval	525-537	2880	3.2	3.6	20	105°/50°
*3474FLBR	3.95x3.0x6.1	Blue	Oval	465-477	510	3.2	3.6	20	105°/50°

* Preliminary Product Availability : Please visit EVERLIGHT website for more updated information (www.everlight.com) or contact EVERLIGHT sales for regional options.


Signage LED | Lamp Type LED | 5mm Oval Type

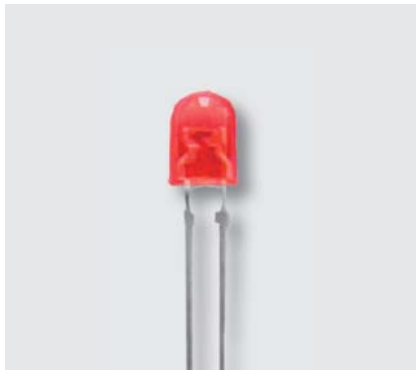


UNIT : mm

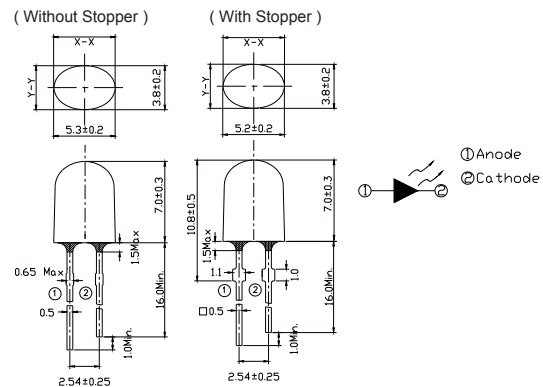


Product	Size (LXWXHmm)	Color	Lens Type	λ_d (nm)	Typ. I_v (mcd)	V_F (V)		I_F (mA)	Viewing Angle (°)
						Typ.	Max.		
5484BN/R7DC-AGJB/X/MS	5.2x3.8x7.0	Red	Oval	619-628	1220	2.2	2.4	20	110°/40°
5484BN/R7DC-AHJB/X/MS	5.2x3.8x7.0	Red	Oval	619-628	1500	2.2	2.4	20	110°/40°
5484BN/GADC-ALMA/X/MS	5.2x3.8x7.0	Green	Oval	525-535	2880	3.2	3.6	20	110°/40°
5484BN/GADC-AMNA/X/MS	5.2x3.8x7.0	Green	Oval	525-535	3800	3.2	3.6	20	110°/40°
5484BN/BADC-AFHA/X/MS	5.2x3.8x7.0	Blue	Oval	465-475	720	3.2	3.6	20	110°/40°
5484BN/BADC-AGJA/X/MS	5.2x3.8x7.0	Blue	Oval	465-475	1030	3.2	3.6	20	110°/40°

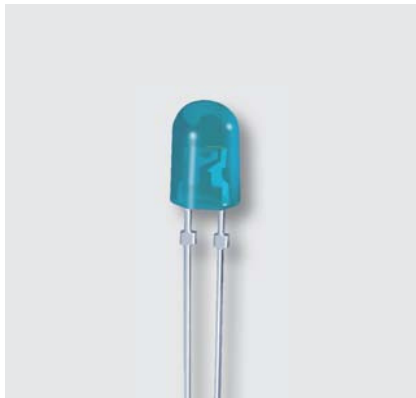

UNIT : mm

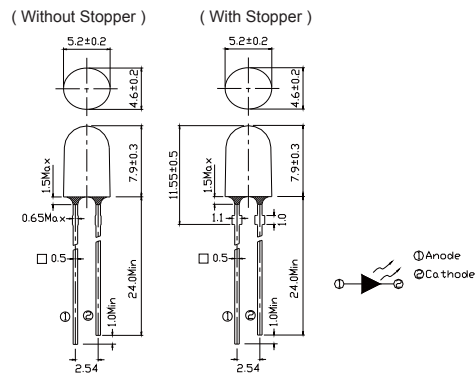

Product	Size (LXWXHmm)	Color	Lens Type	λ_d (nm)	Typ. I_v (mcd)	V_F (V)		I_F (mA)	Viewing Angle (°)
						Typ.	Max.		
6364/GADA-ANQA/X/MS	5.2x4.6x7.9	Green	Oval	525-535	3000	3.2	3.6	20	70°/40°
6364/GADA-AQSA/X/MS	5.2x4.6x7.9	Green	Oval	525-535	4140	3.2	3.6	20	70°/40°
6364/BADA-AHKA/X/MS	5.2x4.6x7.9	Blue	Oval	465-475	1000	3.2	3.6	20	70°/40°
6364/BADA-AKMA/X/MS	5.2x4.6x7.9	Blue	Oval	465-475	2250	3.2	3.6	20	70°/40°
6374/R7DA-AJKB/X/MS	5.2x4.6x7.9	Red	Oval	619-628	2240	2.0	2.6	20	65°/40°
6374/R7DA-AKMB/X/MS	5.2x4.6x7.9	Red	Oval	619-628	1425	2.0	2.6	20	65°/40°
6374/Y7DA-AJKB/X/MS	5.2x4.6x7.9	Yellow	Oval	586-594	2240	2.0	2.6	20	65°/40°
6374/Y7DA-ALNB/X/MS	5.2x4.6x7.9	Yellow	Oval	586-594	2000	2.0	2.6	20	65°/40°

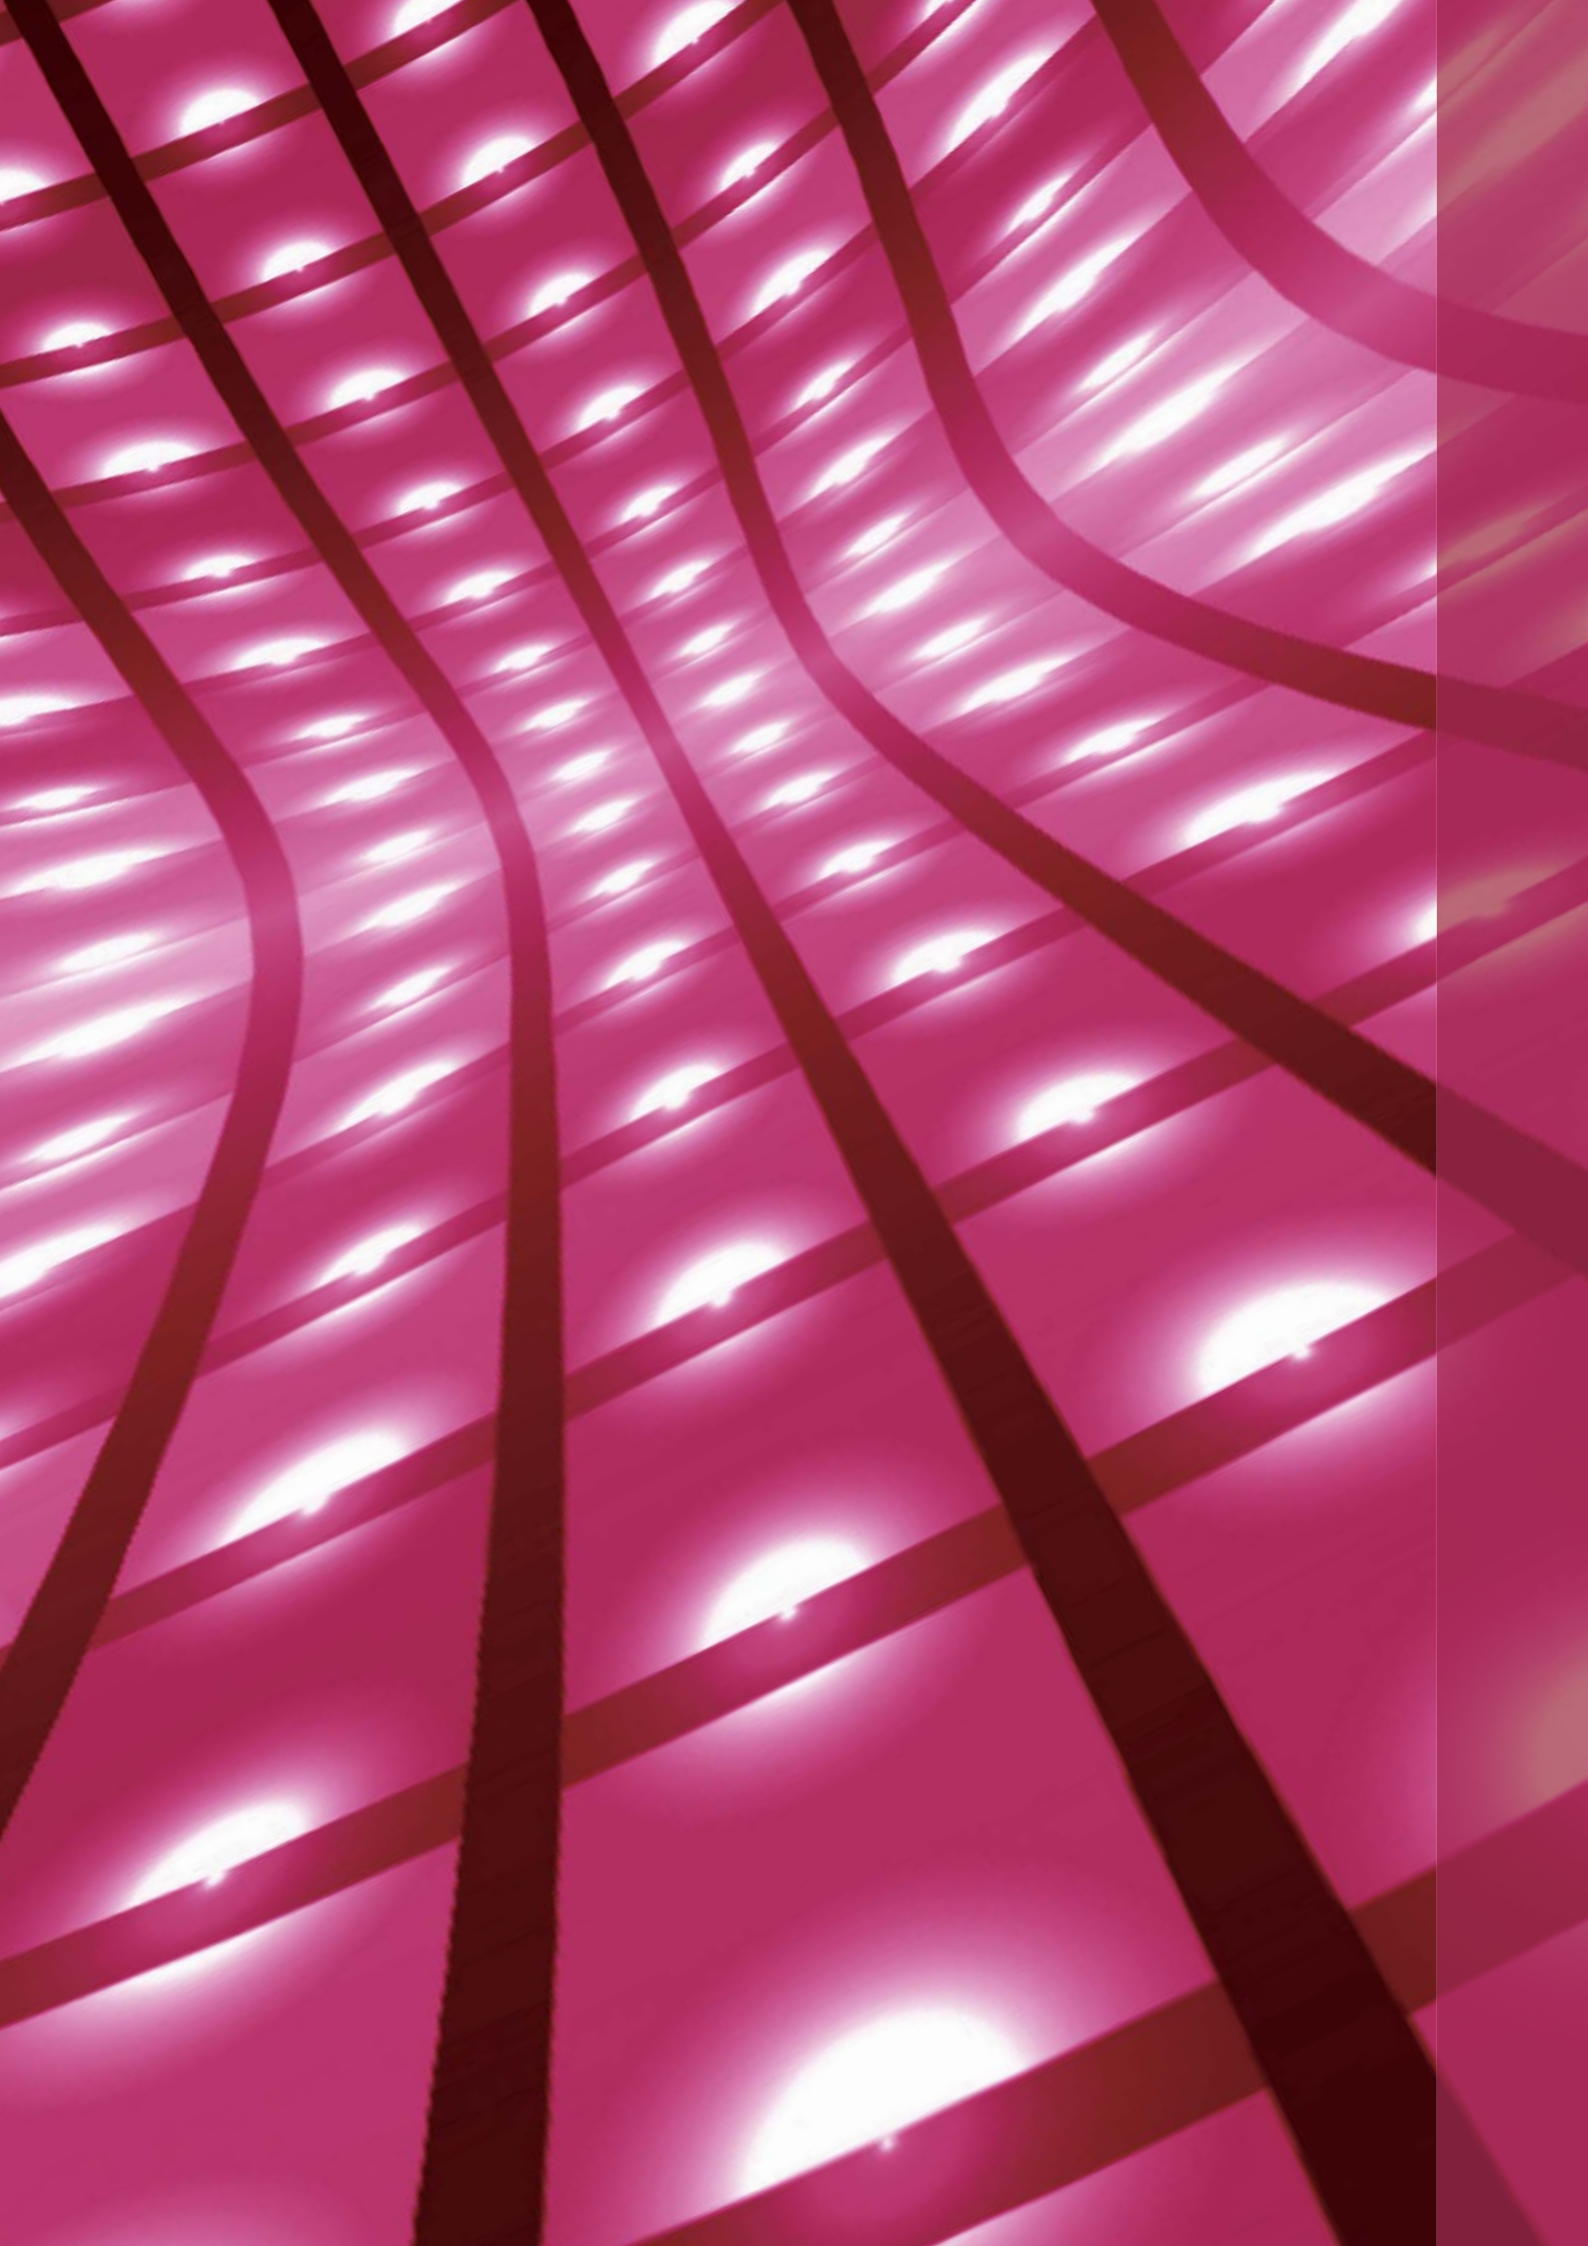


INFRARED LED, SENSORS, COUPLERS

162	INFRARED LED AND SILICON DETECTOR
187	INFRARED RECEIVER MODULE
198	OPTIC-FIBER DEVICE (PHOTO LINK)
210	OPTICAL SENSOR
228	PHOTO COUPLER
247	DISCRETE

Infrared LED and Silicon Detector | Emitter | Lamp 3mm




UNIT : mm

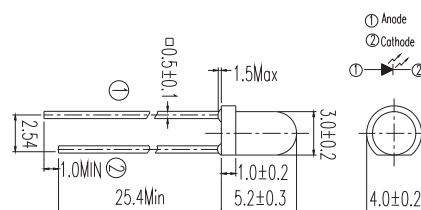

Product	Size (mm)	λ_P (nm)	V_F Typ (V)	V_F Max (V)	I_{E_Min} (mW/sr)	I_{E_Typ} (mW/sr)	Viewing Angle (°)
HIR204	3	850	1.45	1.65	7.8	17.6	25
HIR204/H0	3	850	1.45	1.65	4	8.9	40
HIR204C	3	850	1.45	1.65	7.8	17.6	25
HIR204C/H0	3	850	1.45	1.65	4	8.9	40
IR204-A	3	940	1.2	1.5	4	5.6	35
IR204/H16/L10	3	940	1.2	1.5	2.8	4	50
IR204/H60	3	940	1.2	1.5	4	7	50
IR204C-A	3	940	1.2	1.5	4	5.6	35
IR204C/H16/L10	3	940	1.2	1.5	2.8	4	50
SIR204-A	3	875	1.3	1.6	4	6.4	30
SIR204C	3	875	1.3	1.6	4	6.4	30



UNIT : mm

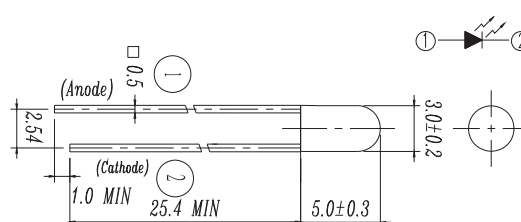


Product	Size (mm)	λ_P (nm)	V_F Typ (V)	V_F Max (V)	I_{E_Min} (mW/sr)	I_{E_Typ} (mW/sr)	Viewing Angle (°)
SIR234	3	875	1.3	1.6	5.6	9.3	30
HIR234C	3	850	1.45	1.65	7.8	15	30

Infrared LED and Silicon Detector | Emitter | Lamp 5mm




UNIT : mm

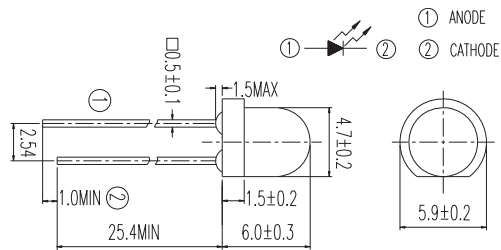


Product	Size (mm)	λ_P (nm)	V_F Typ (V)	V_F Max (V)	I_{E_Min} (mW/sr)	I_{E_Typ} (mW/sr)	Viewing Angle (°)
HIR323C	5	850	1.45	1.65	15	30	25
HIR323C/H0	5	850	1.45	1.65	7.8	11	30
IR323	5	940	1.2	1.5	4	6.4	30
IR323/H0-A	5	940	1.2	1.5	2	3.5	60
SIR323-5	5	875	1.3	1.6	4	7.8	35




UNIT : mm

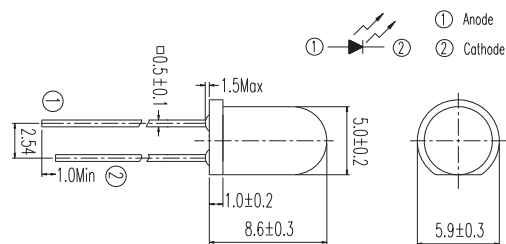

Product	Size (mm)	λ_P (nm)	V_F Typ (V)	V_F Max (V)	I_{E_Min} (mW/sr)	I_{E_Typ} (mW/sr)	Viewing Angle (°)
HIR333/H0	5	850	1.45	1.65	7.8	15	30
HIR333C/H0	5	850	1.45	1.65	7.8	15	30
IR333-A	5	940	1.2	1.5	7.8	20	20
IR333/H0	5	940	1.2	1.5	5.6	7.8	40
IR333/H0/L10	5	940	1.2	1.5	11	12	40
IR333C	5	940	1.2	1.5	7.8	15	20
IR333C/H0/L10	5	940	1.2	1.5	5.6	7.8	40
IR333C/H2	5	940	1.2	1.5	7.8	15	30
SIR333-A	5	875	1.3	1.6	7.8	20	20

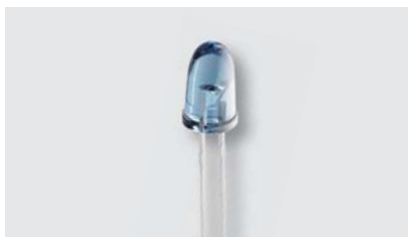

UNIT : mm

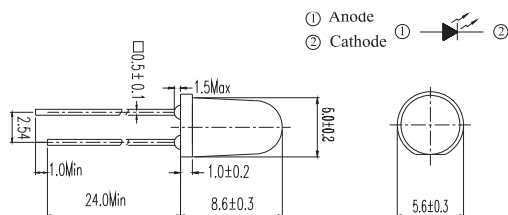


Product	Size (mm)	λ_P (nm)	V_F Typ (V)	V_F Max (V)	I_{E_Min} (mW/sr)	I_{E_Typ} (mW/sr)	Viewing Angle (°)
IR383	5	940	1.2	1.5	7.8	20	20
SIR383C	5	875	1.3	1.6	11	20	20
HIR383C/L289	5	850	1.45	1.65	--	140	18

Infrared LED and Silicon Detector | Emitter | Lamp 5mm




UNIT : mm

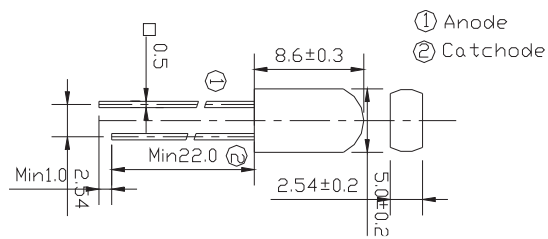

Product	Size (mm)	λ_P (nm)	V_F Typ (V)	V_F Max (V)	I_{E_Min} (mW/sr)	I_{E_Typ} (mW/sr)	Viewing Angle (°)
IR533C	5	940	1.2	1.5	4	7.8	25




UNIT : mm

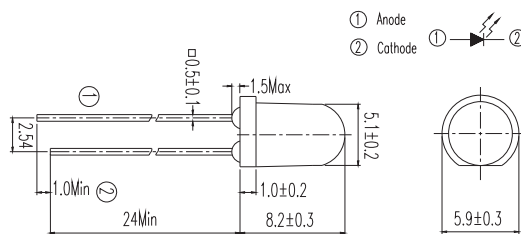

Product	Size (mm)	λ_P (nm)	V_F Typ (V)	V_F Max (V)	I_{E_Min} (mW/sr)	I_{E_Typ} (mW/sr)	Viewing Angle (°)
HIR7373B/L289	5	850	1.45	1.6	21	40	25
HIR7373C	5	850	1.45	1.65	7.8	15	40
IR7373C	5	940	1.2	1.5	5.6	8	50



UNIT : mm

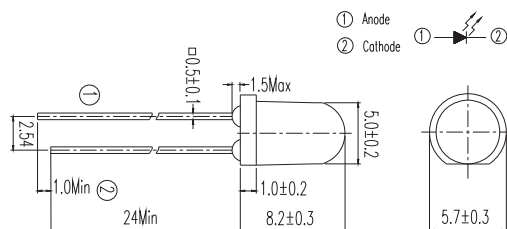


Product	Size (mm)	λ_P (nm)	V_F Typ (V)	V_F Max (V)	I_{E_Min} (mW/sr)	I_{E_Typ} (mW/sr)	Viewing Angle (°)
HIR7393B/L289	5	850	1.45	1.6	7.8	20	50
HIR7393C	5	850	1.45	1.65	7.8	15	50
IR7393C	5	940	1.2	1.5	4	6.5	60

Infrared LED and Silicon Detector | Emitter | Lamp 5mm




UNIT : mm

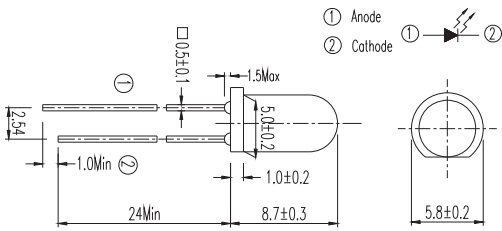



Product	Size (mm)	λ_P (nm)	V_F Typ (V)	V_F Max (V)	I_{E_Min} (mW/sr)	I_{E_Typ} (mW/sr)	Viewing Angle (°)
HIR8323/C16	5	850	1.45	1.65	20	30	30





UNIT : mm

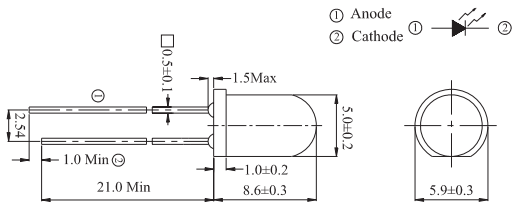


Product	Size (mm)	λ_P (nm)	V_F Typ (V)	V_F Max (V)	I_{E_Min} (mW/sr)	I_{E_Typ} (mW/sr)	Viewing Angle (°)
IR8353-14C	5	940	1.2	1.3	7.8	11	35

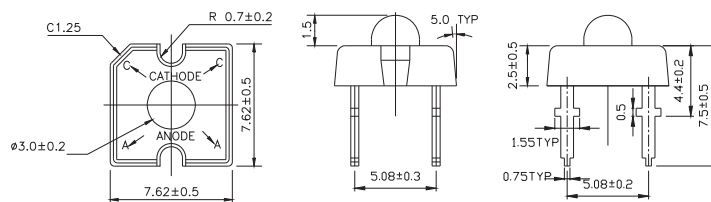

Product	Size (LXWXHmm)	λ_P (nm)	V _F Typ (V)	V _F Max (V)	I _{e_Min} (mW/sr)	I _{e_Typ} (mW/sr)	Viewing Angle (°)
HIR30-01C/S16	7.62x7.62x4.0	850	1.45	1.65	5.6	1	35

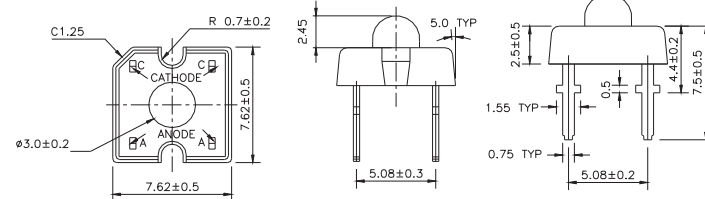

Product	Size (LXWXHmm)	λ _P (nm)	V _F Typ (V)	V _F Max (V)	I _e _Min (mW/sr)	I _e _Typ (mW/sr)	Viewing Angle (°)
HIR36-01C/S32	7.62x7.62x5.0	850	1.45	1.65	15	29	20

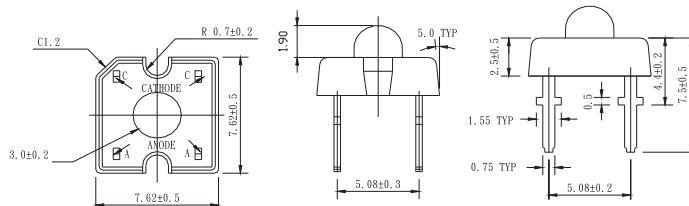


Product	Size (LXWXHmm)	λ_p (nm)	V _F Typ (V)	V _F Max (V)	I _{e_Min} (mW/sr)	I _{e_Typ} (mW/sr)	Viewing Angle (°)
HIR38-01C	7.62x7.62x4.4	850	1.45	1.65	7.8	17	30

Infrared LED and Silicon Detector | Emitter | Side Look




UNIT : mm

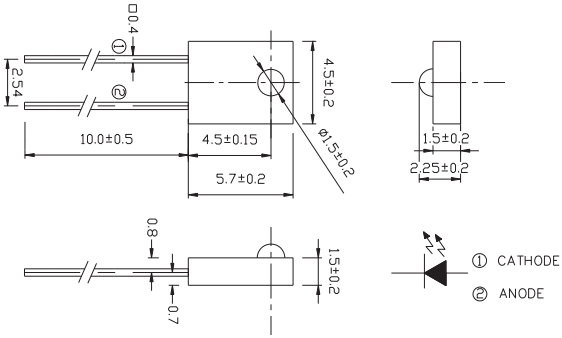

Product	Size (LXWXHmm)	λ_P (nm)	V_F Typ (V)	V_F Max (V)	I_{e_Min} (mW/sr)	I_{e_Typ} (mW/sr)	Viewing Angle (°)
IR908-7C-F	4.5x2.25x5.7	940	1.2	1.5	--	--	60



UNIT : mm

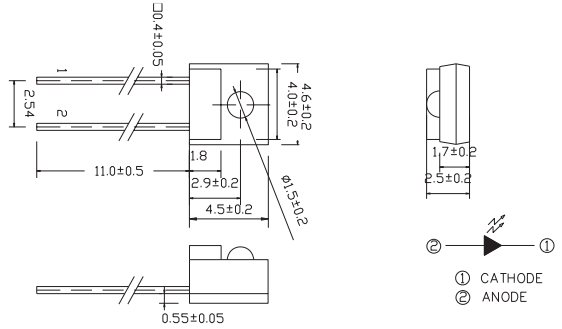


Product	Size (LXWXHmm)	λ_P (nm)	V_F Typ (V)	V_F Max (V)	I_{e_Min} (mW/sr)	I_{e_Typ} (mW/sr)	Viewing Angle (°)
HIR928-6C-F	4.6x2.5x4.5	850	1.45	1.65	--	--	25
SIR928-6C-F	4.6x2.5x4.5	875	1.3	1.6	--	--	40
IR928-6C-F	4.6x2.5x4.5	940	1.2	1.5	--	--	40

Infrared LED and Silicon Detector | Emitter | SMD




UNIT : mm

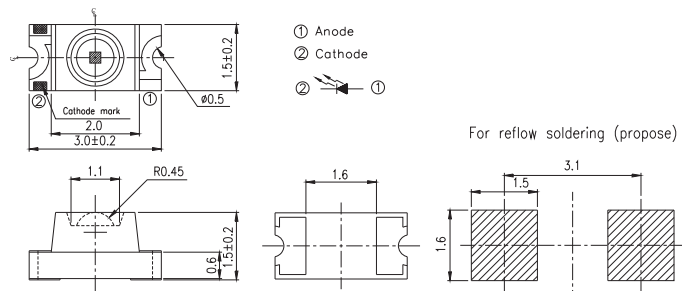

Product	Size (LXWXHmm)	λ_p (nm)	V_F Typ (V)	V_F Max (V)	I_{e_Min} (mW/sr)	I_{e_Typ} (mW/sr)	Viewing Angle (°)
HIR11-21C/L11/TR8	3.0x1.5x1.5	850	1.45	1.65	1	2	75
IR11-21C/TR8	3.0x1.5x1.5	940	1.2	1.5	0.5	1.6	100
IR11-21C/L302/TR8	3.0x1.5x1.5	940	1.2	1.5	1.25	2.25	100




UNIT : mm

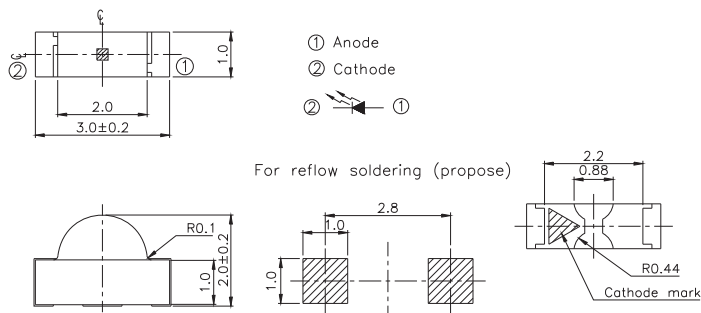

Product	Size (LXWXHmm)	λ_p (nm)	V_F Typ (V)	V_F Max (V)	I_{e_Min} (mW/sr)	I_{e_Typ} (mW/sr)	Viewing Angle (°)
IR12-21C/TR8	3.0x1.0x2.0	940	1.2	1.5	0.5	0.8	160
SIR12-21C/TR8	3.0x1.0x2.0	875	1.3	1.6	0.5	0.9	160
HIR12-21C/TR8	3.0x1.0x2.0	850	1.45	1.65	0.7	1.3	145



UNIT : mm

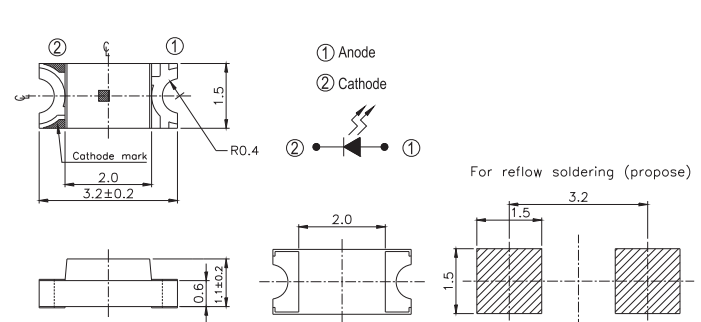


Product	Size (LXWXHmm)	λ_p (nm)	V_F Typ (V)	V_F Max (V)	I_{e_Min} (mW/sr)	I_{e_Typ} (mW/sr)	Viewing Angle (°)
IR15-21C/TR8	3.2x1.5x1.1	940	1.2	1.5	0.2	0.8	160

Infrared LED and Silicon Detector I Emitter I SMD




UNIT : mm

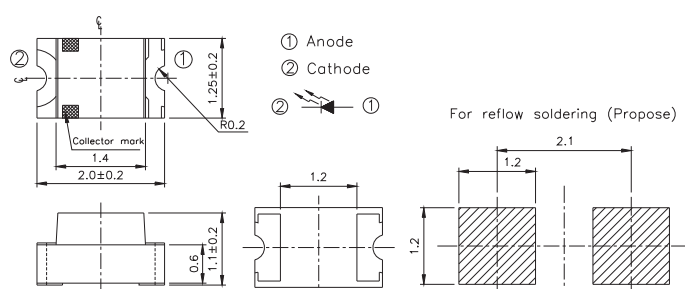

Product	Size (LXWXHmm)	λ_p (nm)	V_F Typ (V)	V_F Max (V)	I_{e_Min} (mW/sr)	I_{e_Typ} (mW/sr)	Viewing Angle (°)
IR17-21C/TR8	2.0x1.25x1.1	940	1.2	1.5	0.2	0.8	120
HIR17-21C/L289/TR8	2.0x1.25x1.1	850	1.4	1.7	1.6	2.1	120




UNIT : mm

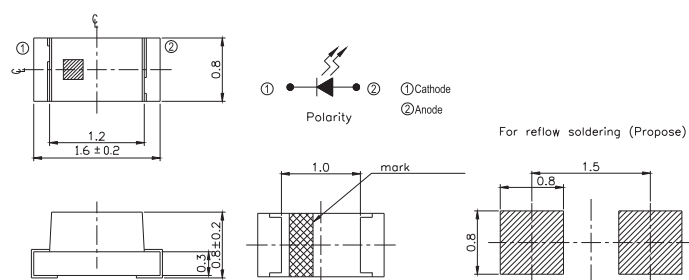

Product	Size (LXWXHmm)	λ_p (nm)	V_F Typ (V)	V_F Max (V)	I_{e_Min} (mW/sr)	I_{e_Typ} (mW/sr)	Viewing Angle (°)
IR19-21C/TR8	1.6x0.8x0.8	940	1.2	1.5	0.2	0.7	150
SIR19-21C/TR8	1.6x0.8x0.8	875	1.3	1.6	0.2	0.5	145
HIR19-21C/L289/TR8	1.6x0.8x0.8	850	1.4	1.7	1.0	1.85	145



UNIT : mm

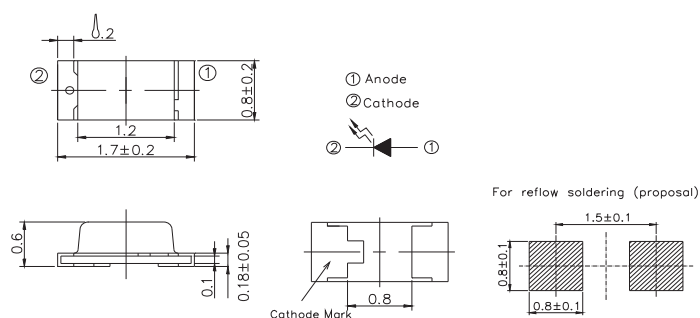


Product	Size (LXWXHmm)	λ_p (nm)	V_F Typ (V)	V_F Max (V)	I_{e_Min} (mW/sr)	I_{e_Typ} (mW/sr)	Viewing Angle (°)
IR19-315C/TR8	1.7x0.8x0.6	940	1.2	1.5	0.2	0.6	140
SIR19-315C/TR8	1.7x0.8x0.6	870	1.35	1.7	1	1.3	140

Infrared LED and Silicon Detector | Emitter | SMD




UNIT : mm

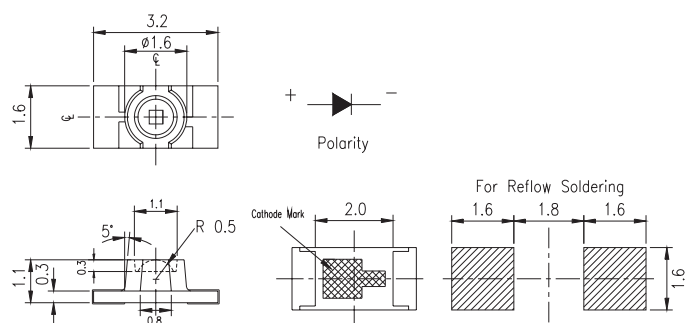


Product	Size (LXWXHmm)	λ_P (nm)	V_F Typ (V)	V_F Max (V)	I_{E_Min} (mW/sr)	I_{E_Typ} (mW/sr)	Viewing Angle (°)
IR25-21C/TR8	3.2x1.6x1.1	940	1.2	1.5	0.5	1.5	160
HIR25-21C/L423/TR8	3.2x1.6x1.1	850	1.45	1.65	3.0	5.5	70




UNIT : mm

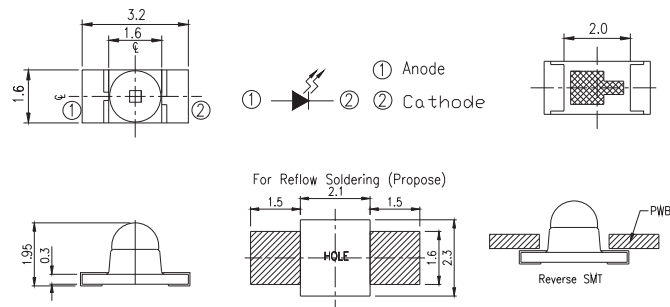

Product	Size (LXWXHmm)	λ_P (nm)	V_F Typ (V)	V_F Max (V)	I_{E_Min} (mW/sr)	I_{E_Typ} (mW/sr)	Viewing Angle (°)
IR26-21C/L110/TR8	3.2x1.6x1.95	940	1.2	1.5	1	3.5	10
HIR26-21B/L423/CT	3.2x1.6x1.95	850	1.45	1.7	10	20	20

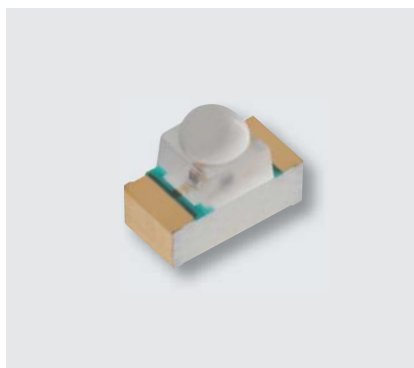


UNIT : mm

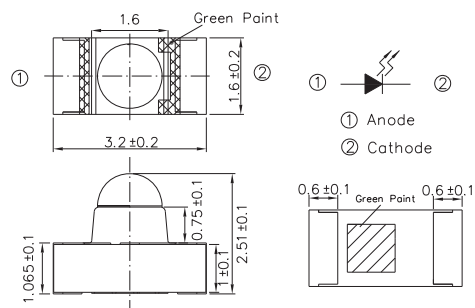


Product	Size (LXWXHmm)	λ_P (nm)	V_F Typ (V)	V_F Max (V)	I_{E_Min} (mW/sr)	I_{E_Typ} (mW/sr)	Viewing Angle (°)
IR26-51C/L110/TR8	3.2x1.6x2.5	940	1.2	1.5	1	3.5	20


Infrared LED and Silicon Detector | Emitter | SMD

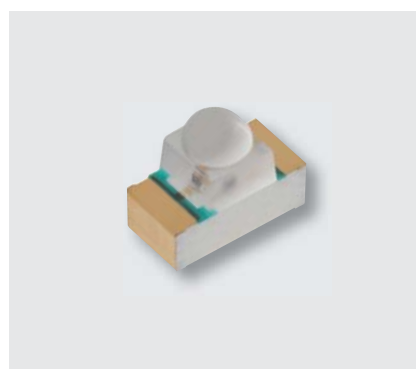


UNIT : mm

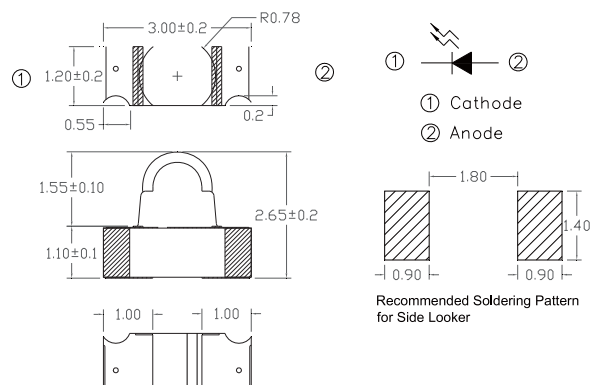

Product	Size (LXWXHmm)	λ_P (nm)	V_F Typ (V)	V_F Max (V)	I_{E_Min} (mW/sr)	I_{E_Typ} (mW/sr)	Viewing Angle (°)
IR26-61C/L302/TR8	3x2.65x1.2	940	1.25	1.5	4.0	8.0	20

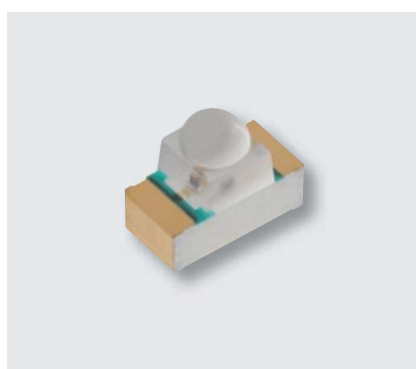

UNIT : mm

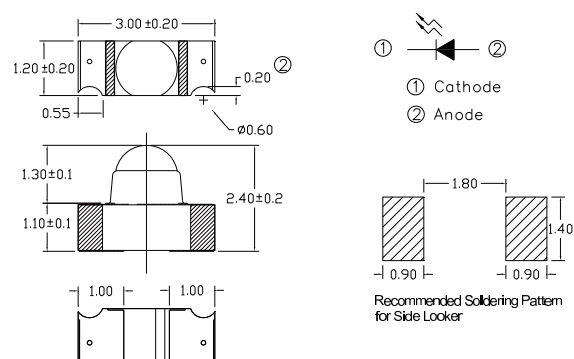


Product	Size (LXWXHmm)	λ_P (nm)	V_F Typ (V)	V_F Max (V)	I_{E_Min} (mW/sr)	I_{E_Typ} (mW/sr)	Viewing Angle (°)
IR26-71C/L302/TR8	3x2.4x1.6	940	1.25	1.5	2.0	4.5	45



PRELIMINARY

UNIT : mm

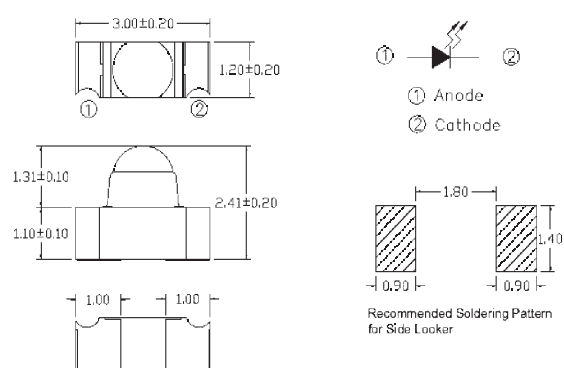


Product	Size (LXWXHmm)	λ_P (nm)	V_F Typ (V)	V_F Max (V)	I_{E_Min} (mW/sr)	I_{E_Typ} (mW/sr)	Viewing Angle (°)
IR26-71C/L447/S63/TR8	3.0x2.41x1.2	940	1.33	1.6	2	8.5	46

* MP Schedule : 12' April.

Infrared LED and Silicon Detector | Emitter | SMD



UNIT : mm

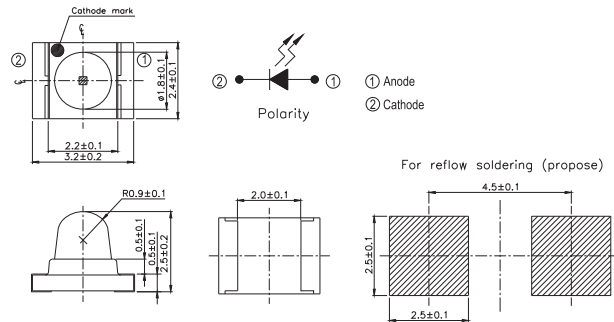


Product	Size (LXWXHmm)	λ_p (nm)	V_F Typ (V)	V_F Max (V)	I_{e_Min} (mW/sr)	I_{e_Typ} (mW/sr)	Viewing Angle (°)
IR42-21C/TR8	3.2x2.4x2.5	940	1.2	1.5	1	3	30
HIR42-21C/L290/TR8	3.2x2.4x2.5	850	1.4	1.7	7	14	35



PRELIMINARY

UNIT : mm

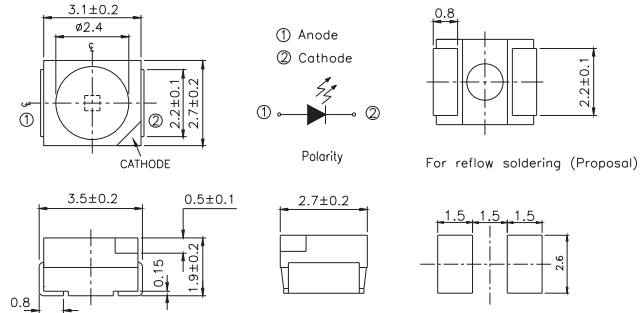


Product	Size (LXWXHmm)	λ_p (nm)	V_F Typ (V)	V_F Max (V)	I_{e_Min} (mW/sr)	I_{e_Typ} (mW/sr)	Viewing Angle (°)
HIR67-21C/L11/TR8	3.5x2.7x1.9	850	1.45	1.65	1	2	120
IR67-21C/TR8	3.5x2.7x1.9	940	1.2	1.5	1	1.5	120
SIR67-21C/TR8	3.5x2.7x1.9	875	1.3	1.6	0.5	1.1	120
HIR67-21C/L289/TR8	3.5x2.7x1.9	850	1.4	1.7	2.0	3.0	120

* MP Schedule : 12' April.



UNIT : mm

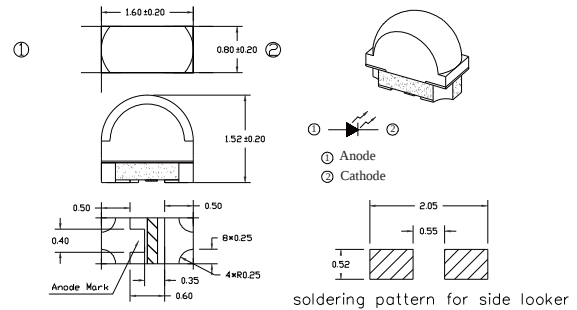


Product	Size (LXWXHmm)	λ_p (nm)	V_F Typ (V)	V_F Max (V)	I_{e_Min} (mW/sr)	I_{e_Typ} (mW/sr)	Viewing Angle (°)
HIR83-01B/TR8	1.6x0.8x1.52	850	1.4	1.4	2	5	100(X) 40(Y)

Infrared LED and Silicon Detector | Emitter | SMD




UNIT : mm

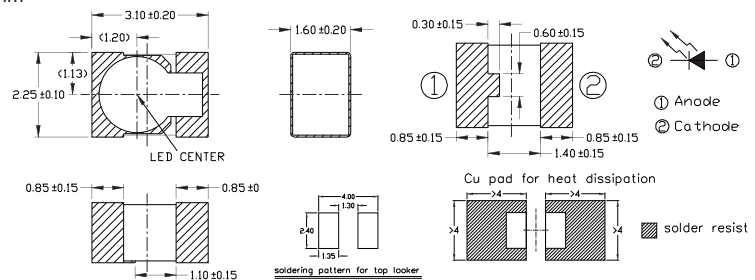


Product	Size (LXWXHmm)	λ_p (nm)	V_F Typ (V)	V_F Max (V)	I_{e_Min} (mW/sr)	I_{e_Typ} (mW/sr)	Viewing Angle (°)
HIR89-01C/1R	3.1x2.25x1.6	850	1.4	1.7	25	55	30




UNIT : mm

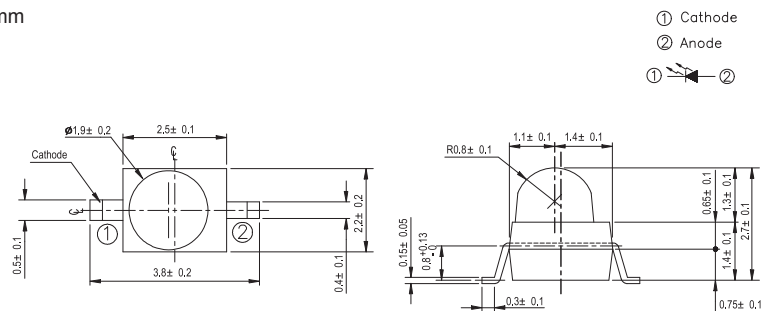

Product	Size (LXWXHmm)	λ_p (nm)	V_F Typ (V)	V_F Max (V)	I_{e_Min} (mW/sr)	I_{e_Typ} (mW/sr)	Viewing Angle (°)
IR91-21C	2.5x2.2x2.7	940	1.2	1.5	3	5	25
IR91-21C/TR7	2.5x2.2x2.7	940	1.2	1.5	3	5	25
IR91-21C/TR10	2.5x2.2x2.7	940	1.2	1.5	3	5	25

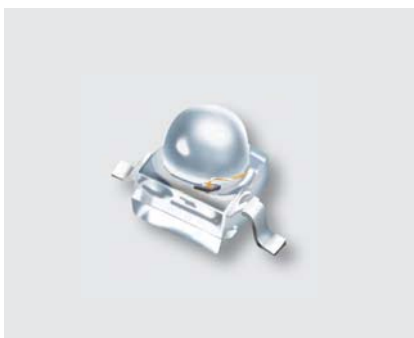

UNIT : mm

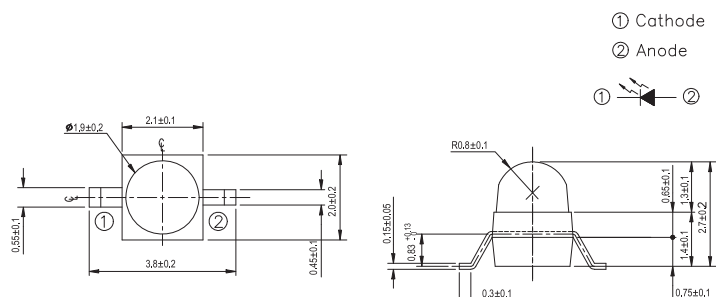


Product	Size (LXWXHmm)	λ_p (nm)	V_F Typ (V)	V_F Max (V)	I_{e_Min} (mW/sr)	I_{e_Typ} (mW/sr)	Viewing Angle (°)
IR95-21C/TR7	2.1x2.0x2.7	940	1.2	1.5	3	5	25

Infrared LED and Silicon Detector | Photo Diode | DIP




UNIT : mm

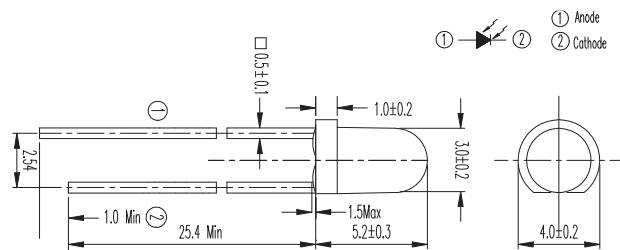


Product	Size (LXWXHmm)	λ_P (nm)	I_L Min (μA)	I_L Typ (μA)	Rise / Fall Time (ns)	BVR_Min (V)	ID_Max (nA)
PD204-6C/L3	3	940	--	10	10 / 10	32	10




UNIT : mm

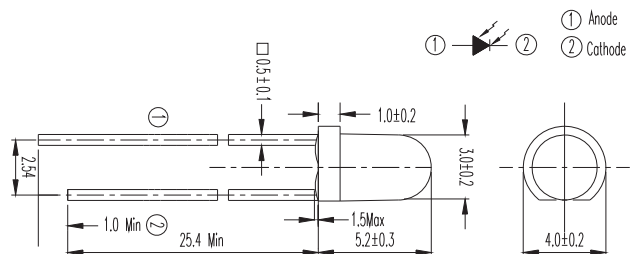


Product	Size (LXWXHmm)	λ_P (nm)	I_L Min (μA)	I_L Typ (μA)	Rise / Fall Time (ns)	BVR_Min (V)	ID_Max (nA)
PD204-6B	3	940	1	3	6 / 6	32	10

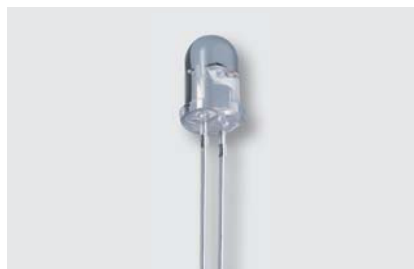


UNIT : mm

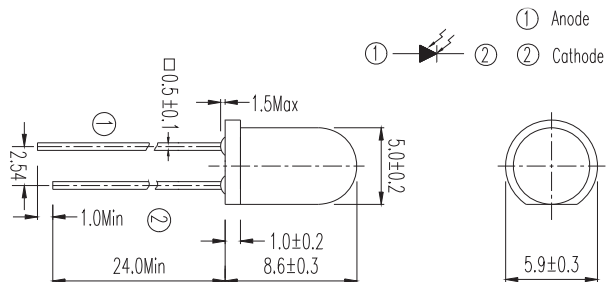

Product	Size (LXWXHmm)	λ_P (nm)	I_L Min (μA)	I_L Typ (μA)	Rise / Fall Time (ns)	BVR_Min (V)	ID_Max (nA)
PD333-3C/H0/L2	5	940	36	40	45 / 45	32	30

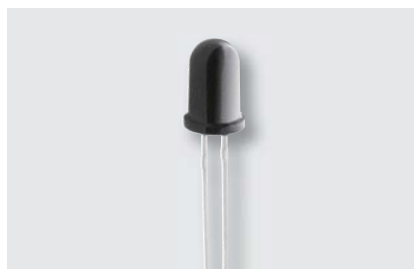

UNIT : mm

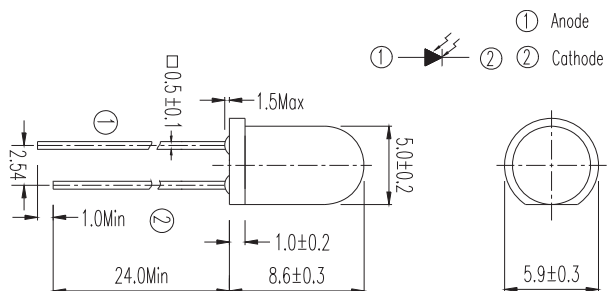


Product	Size (LXWXHmm)	λ_P (nm)	I_L Min (μA)	I_L Typ (μA)	Rise / Fall Time (ns)	BVR_Min (V)	ID_Max (nA)
PD333-3B/H0/L2	5	940	25	35	45 / 45	32	30

Infrared LED and Silicon Detector | Photo Diode | Side Look




UNIT : mm

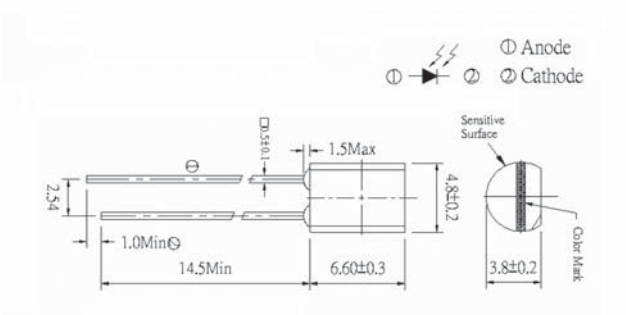

Product	Size (LXWXHmm)	λ_P (nm)	I_L Min (μA)	I_L Typ (μA)	Rise / Fall Time (ns)	BVR_Min.(V)	ID_Max (nA)
PD438C	4.8x3.8x6.6	940	10.2	18	50 / 50	32	30
PD438C/S46	4.8x3.8x6.6	940	10.2	18	50 / 50	32	30




UNIT : mm

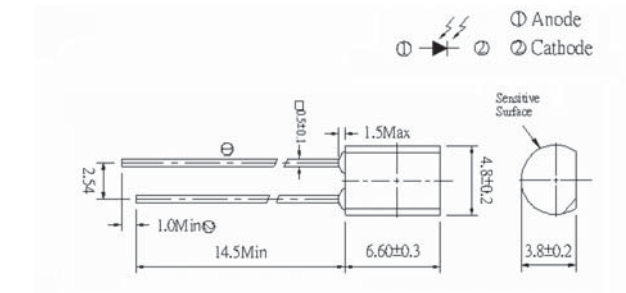

Product	Size (LXWXHmm)	λ_P (nm)	I_L Min (μA)	I_L Typ (μA)	Rise / Fall Time (ns)	BVR_Min.(V)	ID_Max (nA)
PD438B	4.8x3.8x6.6	940	10.2	18	50 / 50	32	30
PD438B/L1	4.8x3.8x6.6	940	10.2	18	50 / 50	32	30
PD438B/S46	4.8x3.8x6.6	940	10.2	18	50 / 50	32	30



UNIT : mm

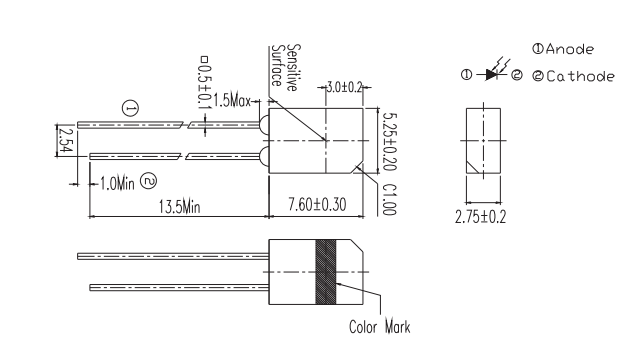


Product	Size (LXWXHmm)	λ_P (nm)	I_L Min (μA)	I_L Typ (μA)	Rise / Fall Time (ns)	BVR_Min.(V)	ID_Max (nA)
PD638B	5.2x2.75x7.6	940	10.2	18	50 / 50	32	30


Infrared LED and Silicon Detector | Photo Diode | SMD




UNIT : mm

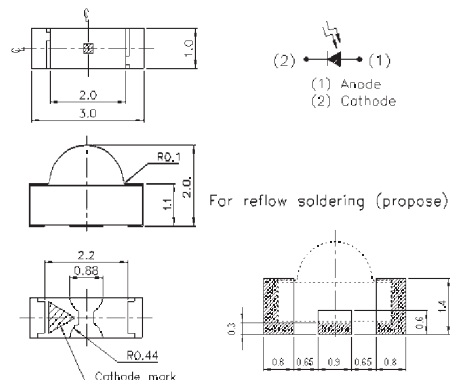


Product	Size (LXWXHmm)	λ_P (nm)	I_L Min (μA)	I_L Typ (μA)	Rise / Fall Time (ns)	BVR_Min.(V)	ID_Max (nA)
PD12-21B/L458/TR8	3x2x1	940	1.3	1.5	6 / 6	33	10

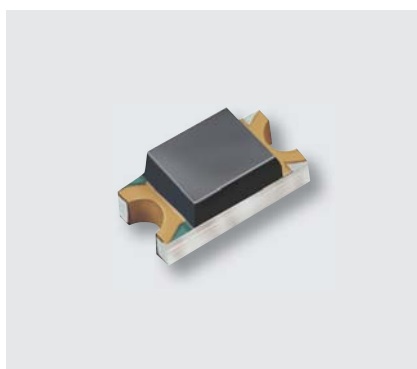


UNIT : mm

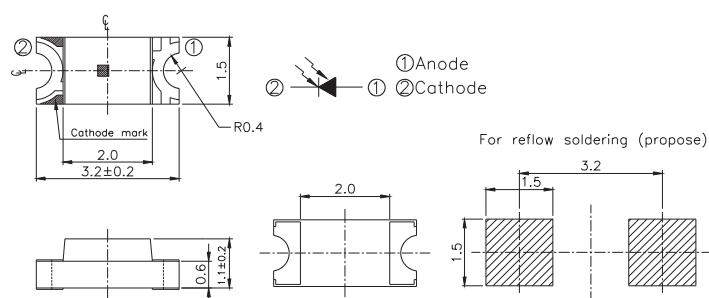

Product	Size (LXWXHmm)	λ_P (nm)	I_L Min (μA)	I_L Typ (μA)	Rise / Fall Time (ns)	BVR_Min.(V)	ID_Max (nA)
PD15-21B/TR8	3.2x1.5x1.1	940	0.2	0.8	6 / 6	32	10

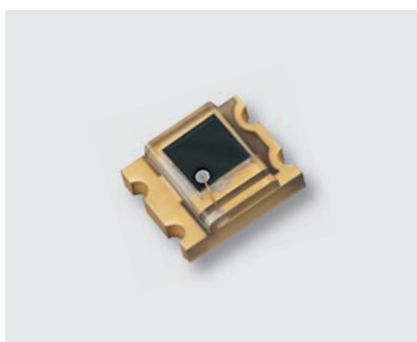

UNIT : mm

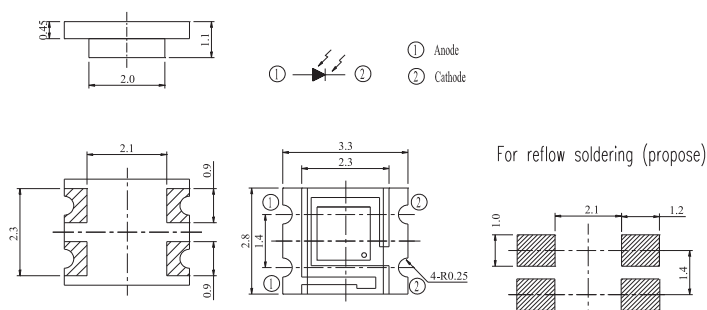


Product	Size (LXWXHmm)	λ_P (nm)	I_L Min (μA)	I_L Typ (μA)	Rise / Fall Time (ns)	BVR_Min.(V)	ID_Max (nA)
PD15-22C/L1/TR8	3.3x2.8x1.1	940	4.2	6.5	10 / 10	32	10

Infrared LED and Silicon Detector | Photo Diode | SMD




UNIT : mm

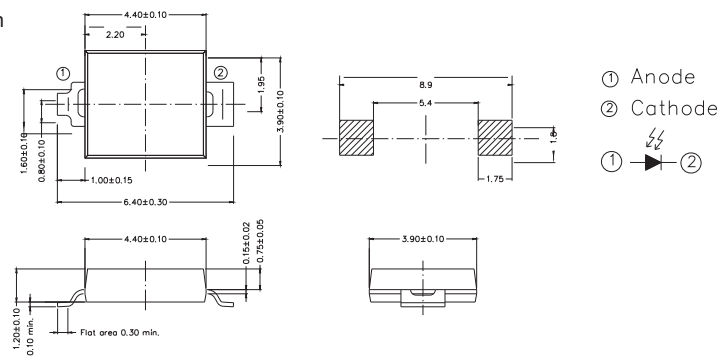

Product	Size (LXWXHmm)	λ_p (nm)	I_L Min (μA)	I_L Typ (μA)	Rise / Fall Time (ns)	BVR_Min.(V)	ID_Max (nA)
PD70-01B/TR7	4.4x3.9x1.2	940	17	25	50 / 50	32	30
PD70-01C/TR7	4.4x3.9x1.2	940	17	25	50 / 50	32	30



UNIT : mm

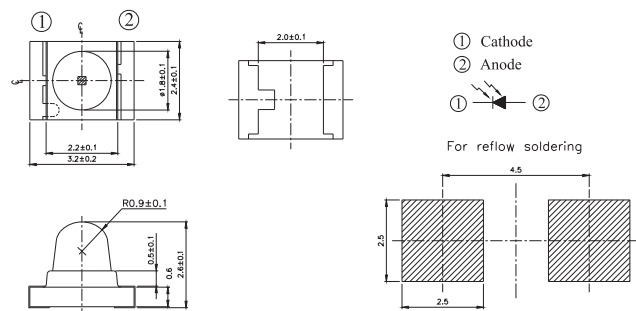


Product	Size (LXWXHmm)	λ_p (nm)	I_L Min (μA)	I_L Typ (μA)	Rise / Fall Time (ns)	BVR_Min.(V)	ID_Max (nA)
PD42-21B/TR8	3.2x2.4x2.6	940	2	4	6 / 6	32	10
PD42-21C/TR8	3.2x2.4x2.6	940	2	5	6 / 6	32	10

Infrared LED and Silicon Detector | Photo Diode | SMD




UNIT : mm

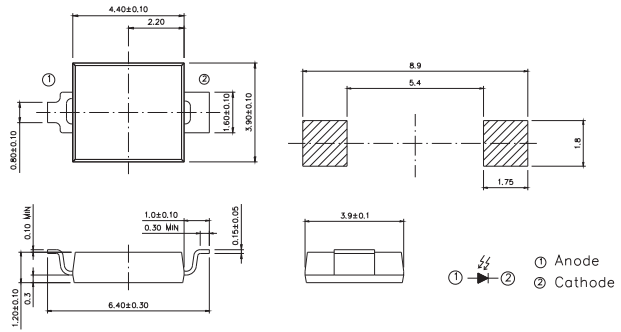

Product	Size (LXWXHmm)	λ_p (nm)	I_L Min (μA)	I_L Typ (μA)	Rise / Fall Time (ns)	BVR_Min.(V)	ID_Max (nA)
PD70-01B/TR10	4.4x3.9x1.2	940	17	25	50 / 50	32	30
PD70-01C/TR10	4.4x3.9x1.2	940	17	25	50 / 50	32	30



UNIT : mm

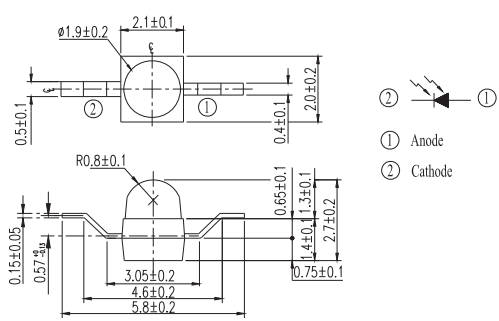


Product	Size (LXWXHmm)	λ_p (nm)	I_L Min (μA)	I_L Typ (μA)	Rise / Fall Time (ns)	BVR_Min.(V)	ID_Max (nA)
PD95-21B/TR10	2.1x2.0x2.7	940	--	4	6 / 6	32	10

Infrared LED and Silicon Detector | Photo Transistor | DIP




UNIT : mm

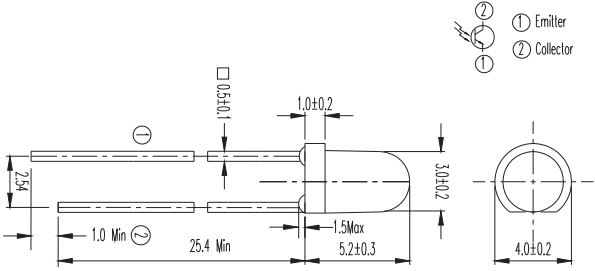


Product	Size (mm)	λ_P (nm)	Rise / Fall Time (μs)	$V_{CE(SAT_Max)}$ (V)	$I_{C(ON_Min)}$ (mA)	$I_{C(ON_Typ)}$ (mA)	$I_{C(ON_Max)}$ (mA)
PT204-6C	3	940	15 / 15	0.4	0.7	2	--




UNIT : mm

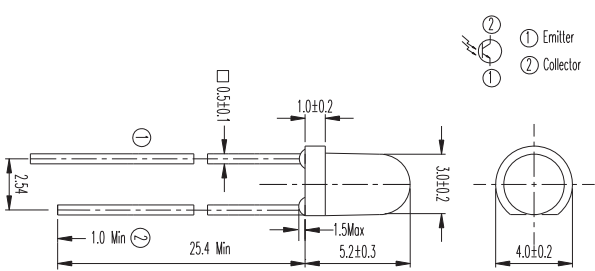

Product	Size (mm)	λ_P (nm)	Rise / Fall Time (μs)	$V_{CE(SAT_Max)}$ (V)	$I_{C(ON_Min)}$ (mA)	$I_{C(ON_Typ)}$ (mA)	$I_{C(ON_Max)}$ (mA)
PT204-6B	3	940	15 / 15	0.4	0.7	--	5.07

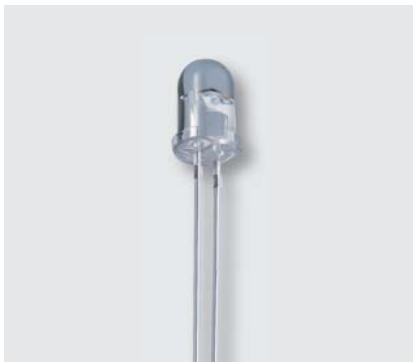

UNIT : mm

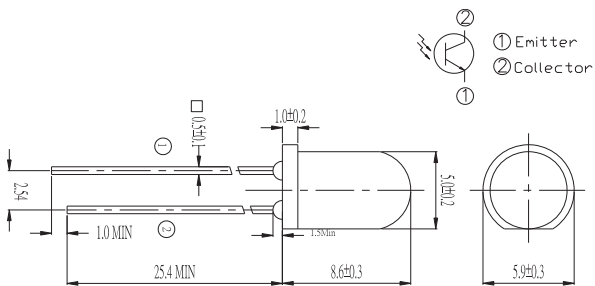


Product	Size (mm)	λ_P (nm)	Rise / Fall Time (μs)	$V_{CE(SAT_Max)}$ (V)	$I_{C(ON_Min)}$ (mA)	$I_{C(ON_Typ)}$ (mA)	$I_{C(ON_Max)}$ (mA)
PT333-3C	5	940	15 / 15	0.4	0.7	4	--

Infrared LED and Silicon Detector | Photo Transistor | DIP




UNIT : mm

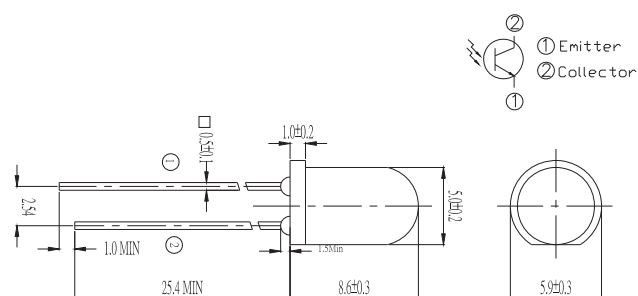

Product	Size (mm)	λ_P (nm)	Rise / Fall Time (μs)	$V_{CE(SAT)}_{Max}$ (V)	$I_{C(ON)}_{Min}$ (mA)	$I_{C(ON)}_{Typ}$ (mA)	$I_{C(ON)}_{Max}$ (mA)
PT333-3B	5	940	15 / 15	0.4	0.7	3	--




UNIT : mm

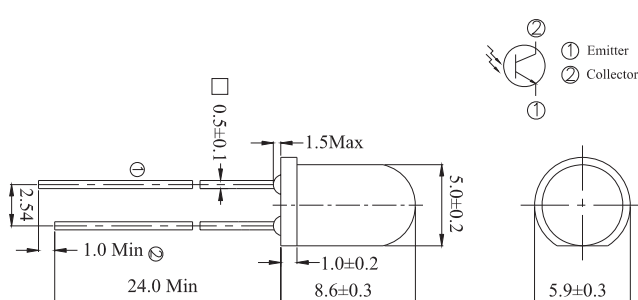

Product	Size (mm)	λ_P (nm)	Rise / Fall Time (μs)	$V_{CE(SAT)}_{Max}$ (V)	$I_{C(ON)}_{Min}$ (mA)	$I_{C(ON)}_{Typ}$ (mA)	$I_{C(ON)}_{Max}$ (mA)
PT334-6C	5	940	15 / 15	0.4	1.77	3.5	--



UNIT : mm

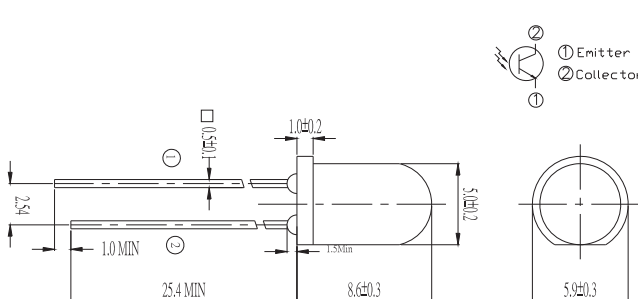


Product	Size (mm)	λ_P (nm)	Rise / Fall Time (μs)	$V_{CE(SAT)}_{Max}$ (V)	$I_{C(ON)}_{Min}$ (mA)	$I_{C(ON)}_{Typ}$ (mA)	$I_{C(ON)}_{Max}$ (mA)
PT334-6B	5	940	15 / 15	0.4	0.7	2	--

Infrared LED and Silicon Detector | Photo Transistor | DIP




UNIT : mm

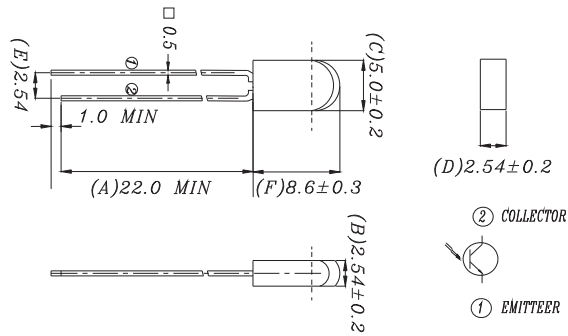

Product	Size (mm)	λ_P (nm)	Rise / Fall Time (μs)	$V_{CE(SAT)}_{Max}$ (V)	$I_{C(ON)}_{Min}$ (mA)	$I_{C(ON)}_{Typ}$ (mA)	$I_{C(ON)}_{Max}$ (mA)
PT534-6B	5	940	15 / 15	0.4	0.7	1.2	--



UNIT : mm

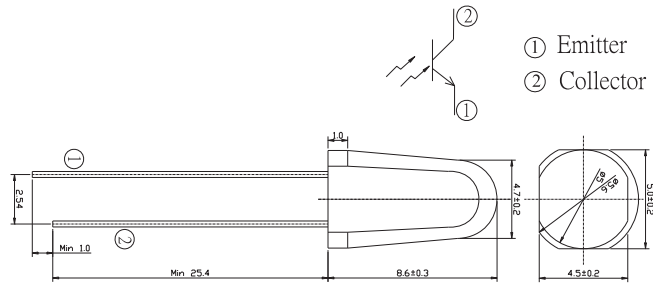


Product	Size (mm)	λ_P (nm)	Rise / Fall Time (μs)	$V_{CE(SAT)}_{Max}$ (V)	$I_{C(ON)}_{Min}$ (mA)	$I_{C(ON)}_{Typ}$ (mA)	$I_{C(ON)}_{Max}$ (mA)
PT1504-6B	5	940	15 / 15	0.4	1.77	4	--

Infrared LED and Silicon Detector | Photo Transistor | Side Look




UNIT : mm

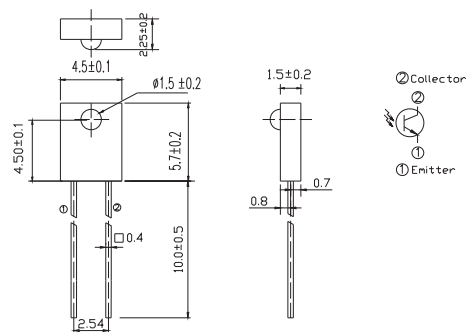

Product	Size (mm)	λ_P (nm)	Rise / Fall Time (μs)	$V_{CE(SAT_Max)}$ (V)	$I_{C(ON_Min)}$ (mA)	$I_{C(ON_Typ)}$ (mA)	$I_{C(ON_Max)}$ (mA)
PT908-7B-F	4.5x2.25x5.7	940	15 / 15	0.4	0.8	--	5
PT908-7C-F	4.5x2.25x5.7	940	15 / 15	0.4	0.8	--	5




UNIT : mm

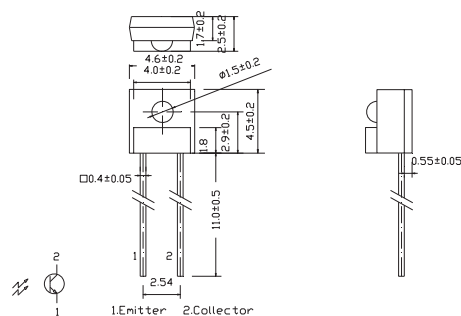

Product	Size (mm)	λ_P (nm)	Rise / Fall Time (μs)	$V_{CE(SAT_Max)}$ (V)	$I_{C(ON_Min)}$ (mA)	$I_{C(ON_Typ)}$ (mA)	$I_{C(ON_Max)}$ (mA)
PT928-6B-F	4.6x2.5x4.5	940	15 / 15	0.4	0.53	--	3.41
PT928-6C-F	4.6x2.5x4.5	940	15 / 15	0.4	0.53	--	3.41



UNIT : mm

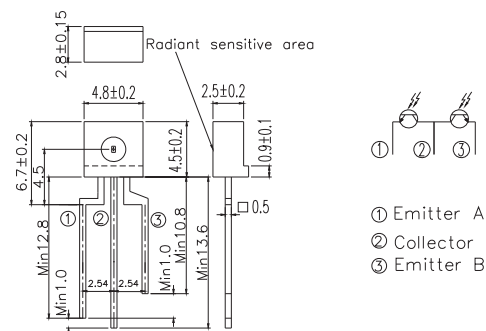


Product	Size (mm)	λ_P (nm)	Rise / Fall Time (μs)	$V_{CE(SAT_Max)}$ (V)	$I_{C(ON_Min)}$ (mA)	$I_{C(ON_Typ)}$ (mA)	$I_{C(ON_Max)}$ (mA)
PT2559B-F	4.8x2.8x4.5	940	15 / 15	0.4	0.129	--	1.018
PT2559B/L2-F	4.8x2.8x4.5	940	15 / 15	0.4	0.129	--	1.085
PT2559B/L2/H2-F	4.8x2.8x4.5	940	15 / 15	0.4	0.129	--	1.085
PT5529B/L2-F	4.8x2.8x4.5	940	15 / 15	0.4	0.129	--	1.085
PT5529B/L2/H2-F	4.8x2.8x4.5	940	15 / 15	0.4	0.129	--	1.085

Infrared LED and Silicon Detector | Photo Transistor | SMD




UNIT : mm

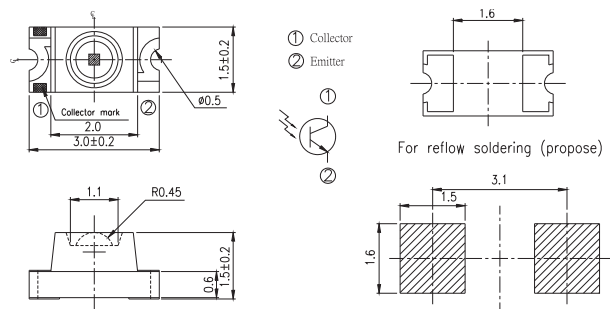

Product	Size (mm)	λ_P (nm)	Rise / Fall Time (μs)	$V_{CE(SAT)}_{Max}$ (V)	$I_{C(ON)}_{Min}$ (mA)	$I_{C(ON)}_{Typ}$ (mA)	$I_{C(ON)}_{Max}$ (mA)
PT11-21C/L41/TR8	3.0x1.5x1.5	940	15 / 15	0.4	0.3	0.8	—




UNIT : mm

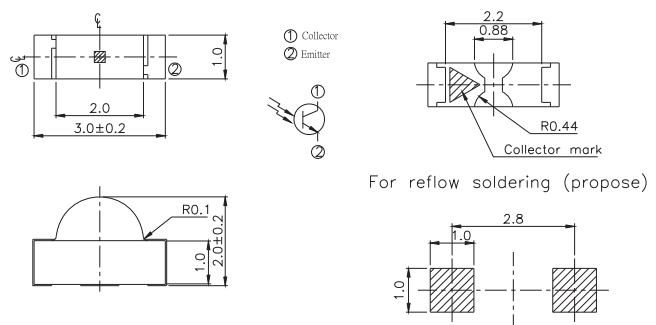

Product	Size (mm)	λ_P (nm)	Rise / Fall Time (μs)	$V_{CE(SAT)}_{Max}$ (V)	$I_{C(ON)}_{Min}$ (mA)	$I_{C(ON)}_{Typ}$ (mA)	$I_{C(ON)}_{Max}$ (mA)
PT12-21B/TR8	3.0x1.0x2.0	940	15 / 15	0.4	0.3	1.14	—
PT12-21C/TR8	3.0x1.0x2.0	940	15 / 15	0.4	0.3	1.14	—




UNIT : mm

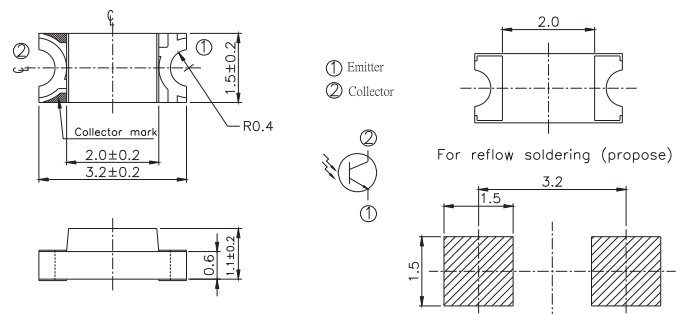


Product	Size (mm)	λ_P (nm)	Rise / Fall Time (μs)	$V_{CE(SAT)}_{Max}$ (V)	$I_{C(ON)}_{Min}$ (mA)	$I_{C(ON)}_{Typ}$ (mA)	$I_{C(ON)}_{Max}$ (mA)
PT15-21B/TR8	3.2x1.5x1.1	940	15 / 15	0.4	0.1	0.3	—
PT15-21C/TR8	3.2x1.5x1.1	940	15 / 15	0.4	0.1	0.3	—


Infrared LED and Silicon Detector | Photo Transistor | SMD

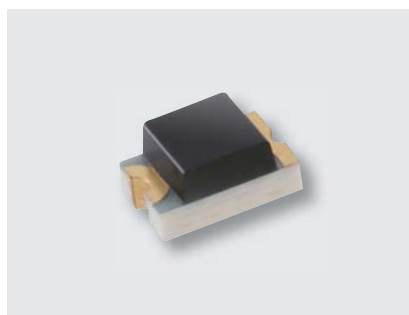


UNIT : mm

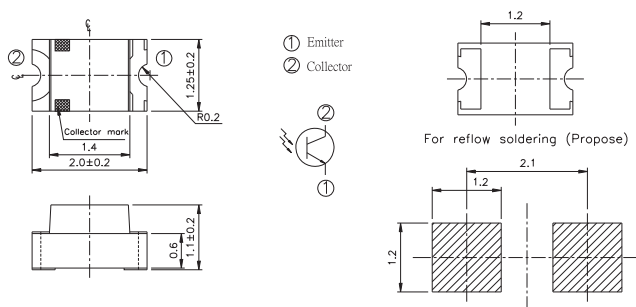

Product	Size (mm)	λ_P (nm)	Rise / Fall Time (μs)	$V_{CE(SAT)}_{Max}$ (V)	$I_{C(ON)}_{Min}$ (mA)	$I_{C(ON)}_{Typ}$ (mA)	$I_{C(ON)}_{Max}$ (mA)
PT17-21B/L41/TR8	2.0x1.25x1.1	940	15 / 15	0.4	0.1	0.65	—
PT17-21C/L41/TR8	2.0x1.25x1.1	940	15 / 15	0.4	0.3	1	—

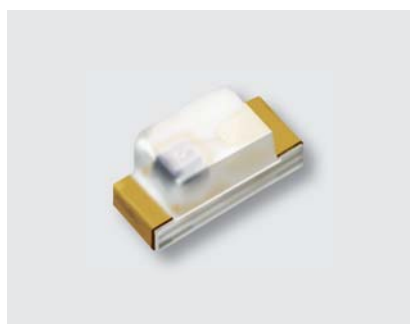


UNIT : mm

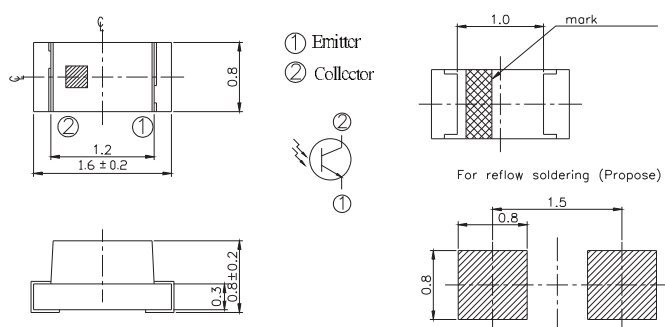

Product	Size (mm)	λ_P (nm)	Rise / Fall Time (μs)	$V_{CE(SAT)}_{Max}$ (V)	$I_{C(ON)}_{Min}$ (mA)	$I_{C(ON)}_{Typ}$ (mA)	$I_{C(ON)}_{Max}$ (mA)
PT19-21B/L41/TR8	1.6x0.8x0.8	940	15 / 15	0.4	0.3	0.6	—
PT19-21C/L41/TR8	1.6x0.8x0.8	940	15 / 15	0.4	0.3	0.6	—




UNIT : mm

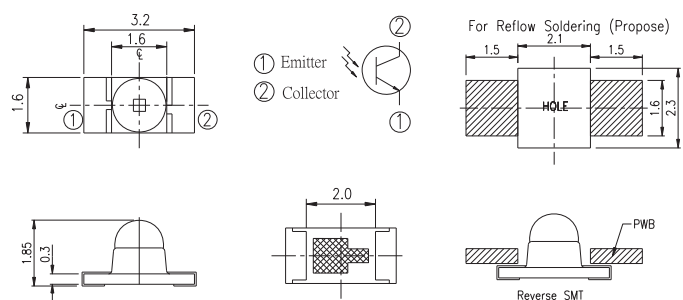


Product	Size (mm)	λ_P (nm)	Rise / Fall Time (μs)	$V_{CE(SAT)}_{Max}$ (V)	$I_{C(ON)}_{Min}$ (mA)	$I_{C(ON)}_{Typ}$ (mA)	$I_{C(ON)}_{Max}$ (mA)
PT26-21B/TR8	3.2x1.6x1.85	940	15 / 15	0.4	—	1	—
PT26-21C/TR8	3.2x1.6x1.85	940	15 / 15	0.4	0.3	2.6	—

Infrared LED and Silicon Detector | Photo Transistor | SMD

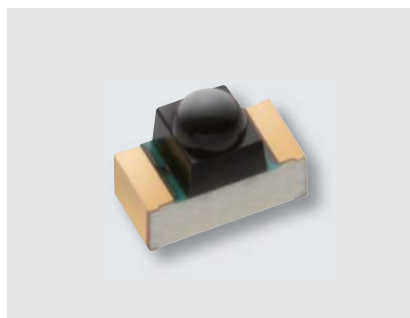


UNIT : mm

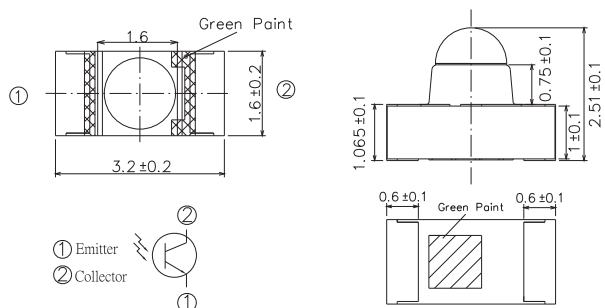

Product	Size (mm)	λ_P (nm)	Rise / Fall Time (μs)	$V_{CE(SAT_Max)}$ (V)	$I_{C(ON_Min)}$ (mA)	$I_{C(ON_Typ)}$ (mA)	$I_{C(ON_Max)}$ (mA)
PT26-51B/TR8	3.2x1.6x2.5	940	15 / 15	0.4	—	1	—




UNIT : mm

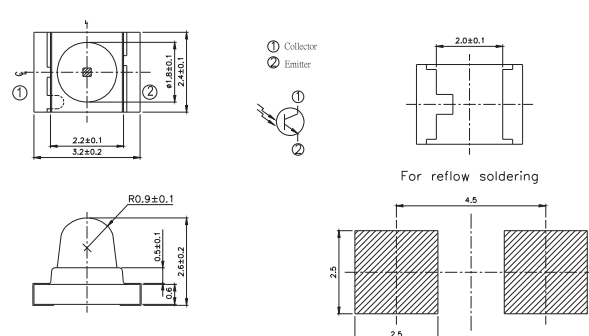

Product	Size (mm)	λ_P (nm)	Rise / Fall Time (μs)	$V_{CE(SAT_Max)}$ (V)	$I_{C(ON_Min)}$ (mA)	$I_{C(ON_Typ)}$ (mA)	$I_{C(ON_Max)}$ (mA)
PT42-21B/TR8	3.2x2.4x2.6	940	15 / 15	0.4	1.77	3	—



UNIT : mm

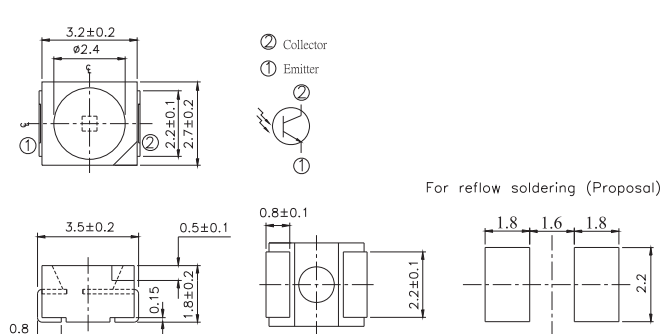


Product	Size (mm)	λ_P (nm)	Rise / Fall Time (μs)	$V_{CE(SAT_Max)}$ (V)	$I_{C(ON_Min)}$ (mA)	$I_{C(ON_Typ)}$ (mA)	$I_{C(ON_Max)}$ (mA)
PT67-21B/C14/TR8	3.5x2.7x1.8	940	15 / 15	0.4	0.016	—	0.08

Infrared LED and Silicon Detector | Photo Transistor | SMD




UNIT : mm

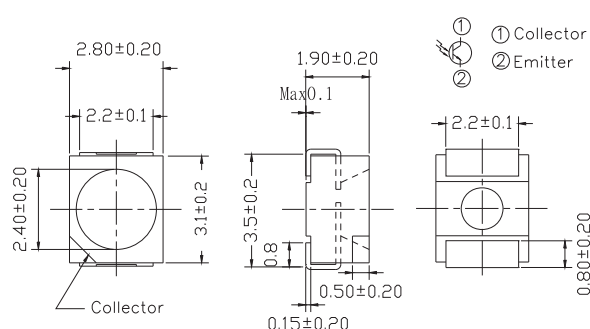

Product	Size (mm)	λ_P (nm)	Rise / Fall Time (μs)	$V_{CE(SAT_Max)}$ (V)	$I_{C(ON_Min)}$ (mA)	$I_{C(ON_Typ)}$ (mA)	$I_{C(ON_Max)}$ (mA)
PT67-21C/L41/TR8	3.5x2.8x1.9	940	15 / 15	0.4	0.3	--	1




UNIT : mm

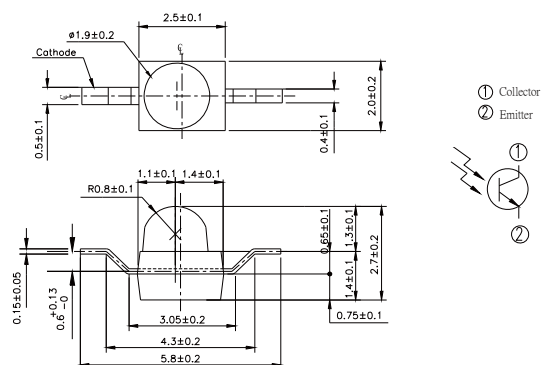

Product	Size (mm)	λ_P (nm)	Rise / Fall Time (μs)	$V_{CE(SAT_Max)}$ (V)	$I_{C(ON_Min)}$ (mA)	$I_{C(ON_Typ)}$ (mA)	$I_{C(ON_Max)}$ (mA)
PT91-21B	2.5x2.0x2.7	940	15 / 15	0.4	1	1.5	--
PT91-21B/TR10	2.5x2.0x2.7	940	15 / 15	0.4	1	1.5	--
PT91-21B/TR7	2.5x2.0x2.7	940	15 / 15	0.4	1	1.5	--
PT91-21B/TR9	2.5x2.0x2.7	940	15 / 15	0.4	1	1.5	--



UNIT : mm

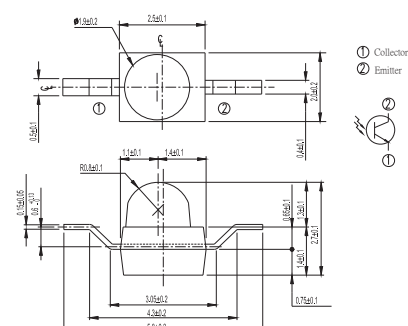


Product	Size (mm)	λ_P (nm)	Rise / Fall Time (μs)	$V_{CE(SAT_Max)}$ (V)	$I_{C(ON_Min)}$ (mA)	$I_{C(ON_Typ)}$ (mA)	$I_{C(ON_Max)}$ (mA)
PT91-21C	2.5x2.0x2.7	940	15 / 15	0.4	1	1.5	--
PT91-21C/TR10	2.5x2.0x2.7	940	15 / 15	0.4	1	1.5	--
PT91-21C/TR7	2.5x2.0x2.7	940	15 / 15	0.4	1	1.5	--

Infrared Receiver Module | Short Burst | DIP-Vo – GND – Vcc



UNIT : mm

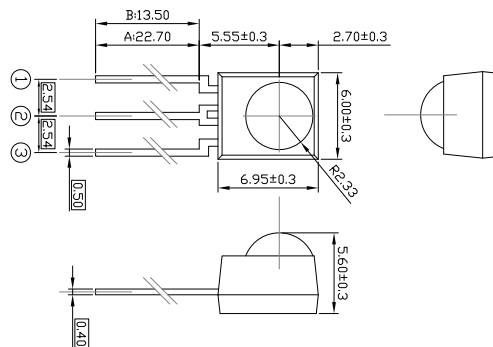


Product	Size (mm)	λ_p (nm)	Carrier Freq. (KHz)	Supply Voltage (V)	I_{CC} Typ (mA)	L_{Center} (m)	L_{45} (m)
IRM-3636M ^(A)	8.25x6.0x5.6	940	36	3~5	0.4	14	6
IRM-3638M ^(A)	8.25x6.0x5.6	940	38	3~5	0.4	14	6
IRM-3656M ^(A)	8.25x6.0x5.6	940	56	3~5	0.4	14	6
IRM-3636M-X ^(B)	8.25x6.0x5.6	940	36	3~5	0.4	14	6
IRM-3638M-X ^(B)	8.25x6.0x5.6	940	38	3~5	0.4	14	6
IRM-3656M-X ^(B)	8.25x6.0x5.6	940	56	3~5	0.4	14	6

Infrared Receiver Module | Short Burst | DIP-Vo – Vcc – GND



UNIT : mm

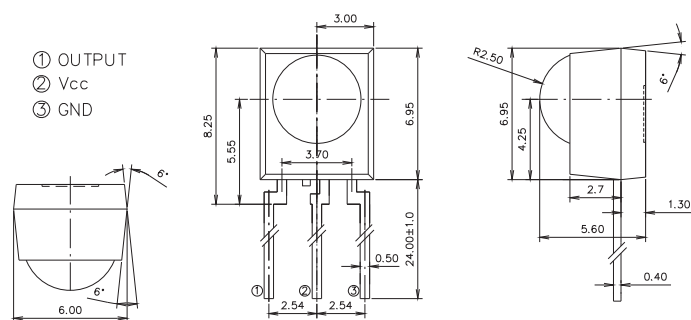


Product	Size (mm)	λ_p (nm)	Carrier Freq. (KHz)	Supply Voltage (V)	I_{CC} Typ (mA)	L_{Center} (m)	L_{45} (m)
IRM-3736M	8.25x6.0x5.6	940	36	3~5	0.4	14	6
IRM-3738M	8.25x6.0x5.6	940	38	3~5	0.4	14	6

Infrared Receiver Module | Short Burst | SMD




UNIT : mm

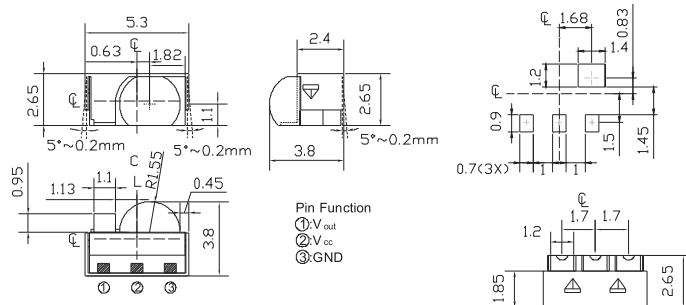

Product	Size (mm)	λ_p (nm)	Carrier Freq. (KHz)	Supply Voltage (V)	I _{CC} Typ (mA)	L _{Center} (m)	L ₄₅ (m)
IRM-V536M/TR1	5.3x3.8x2.65	940	36	3~5	0.4	8	5




UNIT : mm

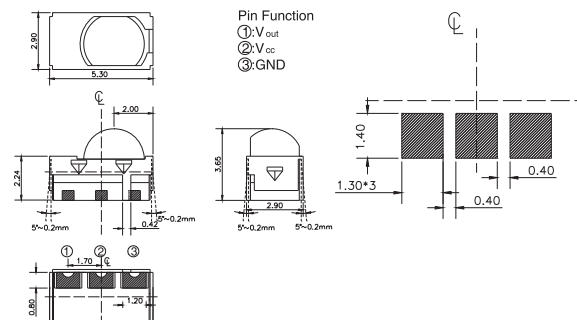

Product	Size (mm)	λ_p (nm)	Carrier Freq. (KHz)	Supply Voltage (V)	I _{CC} Typ (mA)	L _{Center} (m)	L ₄₅ (m)
IRM-H536M/TR2	5.3x2.9x3.65	940	36	3~5	0.4	8	5



UNIT : mm

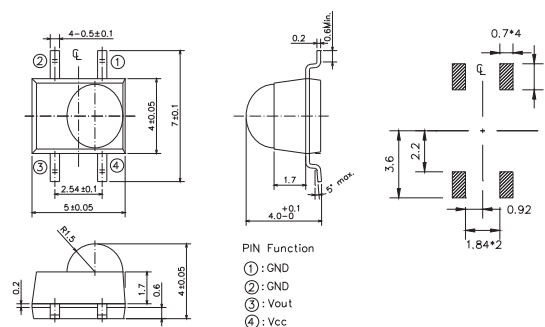


Product	Size (mm)	λ_p (nm)	Carrier Freq. (KHz)	Supply Voltage (V)	I _{CC} Typ (mA)	L _{Center} (m)	L ₄₅ (m)
IRM-H636M/TR2	5.0x4.0x4.0	940	36	3~5	0.4	8	5

Infrared Receiver Module | Standard Burst | DIP-Vo – GND – Vcc




UNIT : mm

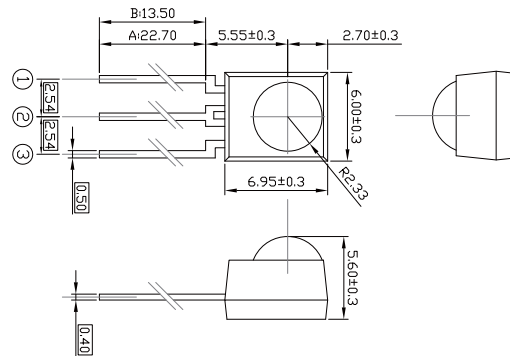


Product	Size (mm)	λ_p (nm)	Carrier Freq. (KHz)	Supply Voltage (V)	I_{CC} Typ (mA)	L_{Center} (m)	L_{45} (m)
IRM-3636M3 ^(A)	8.25x6.0x5.6	940	36	3~5	0.4	14	6
IRM-3636T ^(A)	8.25x6.0x5.6	940	36	3~5	1.0	14	6
IRM-3638M2 ^(A)	8.25x6.0x5.6	940	38	3~5	0.4	14	6
IRM-3638M3 ^(A)	8.25x6.0x5.6	940	38	3~5	0.4	14	6
IRM-3638T ^(A)	8.25x6.0x5.6	940	38	3~5	1.0	14	6
IRM-3638C ^(A)	8.25x6.0x5.6	940	38	2.7~5	0.9	14	6
IRM-3640M2 ^(A)	8.25x6.0x5.6	940	40	3~5	0.4	14	6
IRM-3640M3 ^(A)	8.25x6.0x5.6	940	40	3~5	0.4	14	6
IRM-3640T ^(A)	8.25x6.0x5.6	940	40	3~5	1.0	14	6
IRM-3640C ^(A)	8.25x6.0x5.6	940	40	2.7~5	0.9	14	6
IRM-3656M3 ^(A)	8.25x6.0x5.6	940	56	3~5	0.4	14	6
IRM-3656T ^(A)	8.25x6.0x5.6	940	56	3~5	1.0	14	6
IRM-3636T-X ^(B)	8.25x6.0x5.6	940	36	3~5	1.0	14	6
IRM-3638M2-X ^(B)	8.25x6.0x5.6	940	38	3~5	0.4	14	6
IRM-3638M3-X ^(B)	8.25x6.0x5.6	940	38	3~5	0.4	14	6
IRM-3638T-X ^(B)	8.25x6.0x5.6	940	38	3~5	1.0	14	6
IRM-3638C-X ^(B)	8.25x6.0x5.6	940	38	2.7~5	0.9	14	6
IRM-3640T-X ^(B)	8.25x6.0x5.6	940	40	3~5	1.0	14	6
IRM-3656M3-X ^(B)	8.25x6.0x5.6	940	56	3~5	0.4	14	6




UNIT : mm

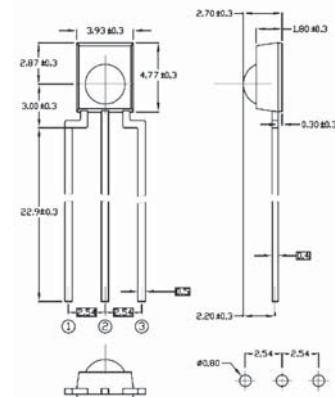



Product	Size (mm)	λ_p (nm)	Carrier Freq. (KHz)	Supply Voltage (V)	I_{CC} Typ (mA)	L_{Center} (m)	L_{45} (m)
IRM-6638M3	6.27x4.36x3.1	940	38	3~5	0.4	8	4
IRM-6638T	6.27x4.36x3.1	940	38	3~5	1.0	8	4
IRM-6640M2	6.27x4.36x3.1	940	40	3~5	0.4	8	4

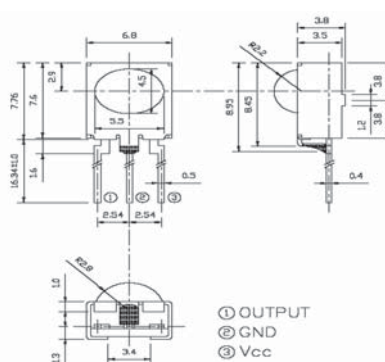

Product	Size (mm)	λ_p (nm)	Carrier Freq. (KHz)	Supply Voltage (V)	I_{CC} Typ (mA)	L_{Center} (m)	L_{45} (m)
IRM-8601M2	9.2x6.8x6.0	940	38	3~5	0.4	8	4
IRM-8601M2-2	9.2x6.8x6.0	940	36	3~5	0.4	8	4

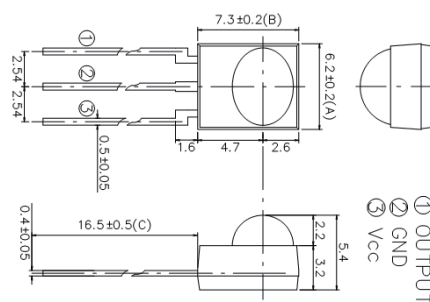

Product	Size (mm)	λ_P (nm)	Carrier Freq. (KHz)	Supply Voltage (V)	I_{CC} Typ (mA)	L_{Center} (m)	L_{45} (m)
IRM-8601M2-M	7.3×6.2×5.4	940	38	3~5	0.4	14	6

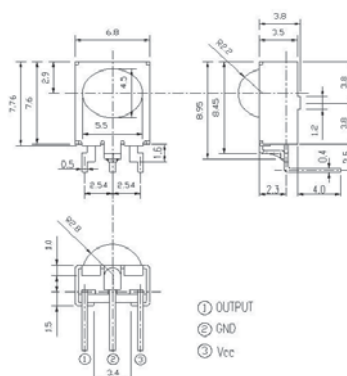


Product	Size (mm)	λ_p (nm)	Carrier Freq. (KHz)	Supply Voltage (V)	I_{CC} Typ (mA)	L_{Center} (cm)	L_{45} (m)
IRM-8602M2	10.1x6.8x6.0	940	38	3~5	0.4	8	4
IRM-8602M2-2	10.1x6.8x6.0	940	36	3~5	0.4	8	4

Infrared Receiver Module | Standard Burst | DIP-Vo – GND – Vcc




UNIT : mm

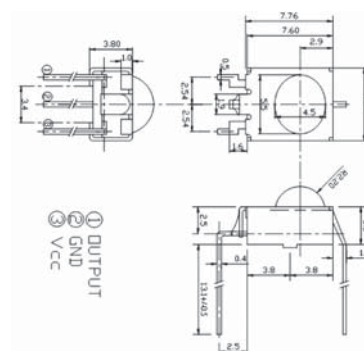

Product	Size (mm)	λ_p (nm)	Carrier Freq. (KHz)	Supply Voltage (V)	I_{CC} Typ (mA)	L_{Center} (m)	L_{45} (m)
IRM-8607M2	10.1x6.8x6.0	940	38	3~5	0.4	8	4




UNIT : mm

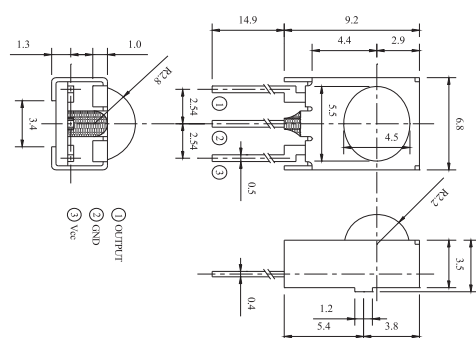

Product	Size (mm)	λ_p (nm)	Carrier Freq. (KHz)	Supply Voltage (V)	I_{CC} Typ (mA)	L_{Center} (m)	L_{45} (m)
IRM-8608M2	9.2x6.8x6.0	940	38	3~5	0.4	8	4



UNIT : mm

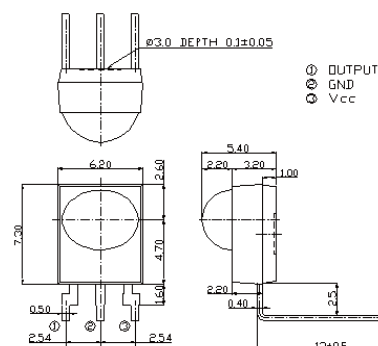


Product	Size (mm)	λ_p (nm)	Carrier Freq. (KHz)	Supply Voltage (V)	I_{CC} Typ (mA)	L_{Center} (m)	L_{45} (m)
IRM-8609M2-4-M	9.2x6.2x5.4	940	40	3~5	0.4	14	6

Infrared Receiver Module | Standard Burst | DIP-Vo – GND – Vcc




UNIT : mm

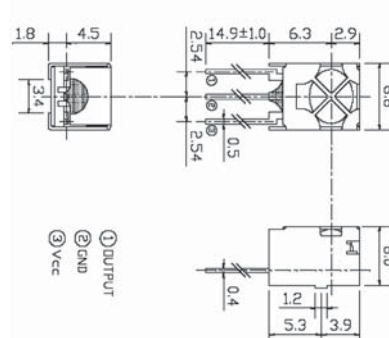

Product	Size (mm)	λ_p (nm)	Carrier Freq. (KHz)	Supply Voltage (V)	I_{CC} Typ (mA)	L_{Center} (m)	L_{45} (m)
IRM-8751M2	9.2x6.8x6.0	940	38	3~5	0.4	8	4




UNIT : mm

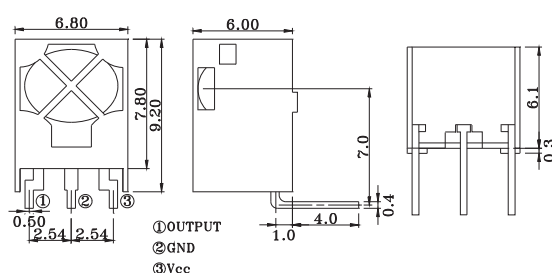

Product	Size (mm)	λ_p (nm)	Carrier Freq. (KHz)	Supply Voltage (V)	I_{CC} Typ (mA)	L_{Center} (m)	L_{45} (m)
IRM-8752M2	10.1x6.8x6.0	940	38	3~5	0.4	8	4



UNIT : mm

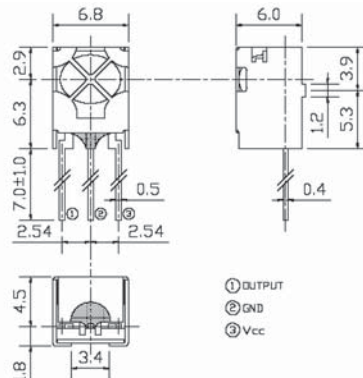


Product	Size (mm)	λ_p (nm)	Carrier Freq. (KHz)	Supply Voltage (V)	I_{CC} Typ (mA)	L_{Center} (m)	L_{45} (m)
IRM-8753M2	9.2x6.8x6.0	940	38	3~5	0.4	8	4

Infrared Receiver Module ■ Standard Burst ■ DIP-Vo – GND – Vcc




UNIT : mm

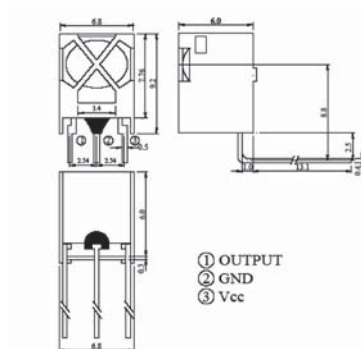

Product	Size (mm)	λ_p (nm)	Carrier Freq. (KHz)	Supply Voltage (V)	I_{CC} Typ (mA)	L_{Center} (m)	L_{45} (m)
IRM-8755M2	9.2x6.8x6.0	940	38	3~5	0.4	8	4




UNIT : mm

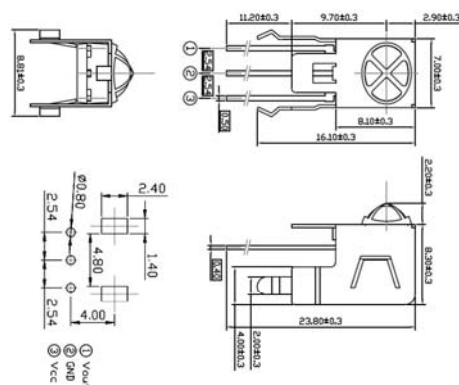

Product	Size (mm)	λ_p (nm)	Carrier Freq. (KHz)	Supply Voltage (V)	I_{CC} Typ (mA)	L_{Center} (m)	L_{45} (m)
IRM-8861M2	8.1×7.0×10.5	940	38	3~5	0.4	8	4



UNIT : mm

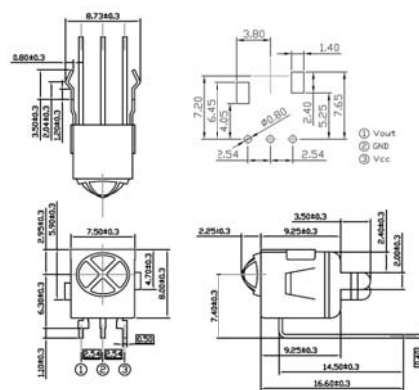


Product	Size (mm)	λ_p (nm)	Carrier Freq. (KHz)	Supply Voltage (V)	I _{CC} Typ (mA)	L _{Center} (m)	L ₄₅ (m)
IRM-8871M2	10.4x7.5x11.5	940	38	3~5	0.4	8	4

Infrared Receiver Module | Standard Burst | DIP-Vo – GND – Vcc




UNIT : mm

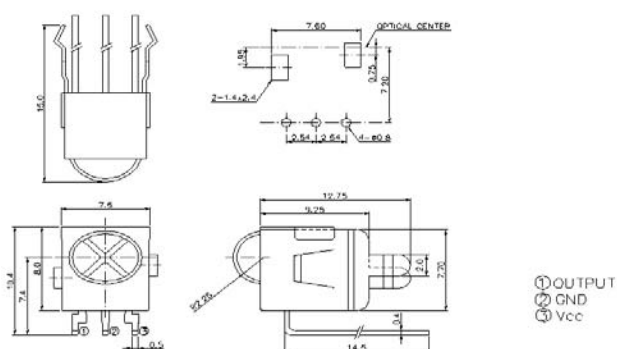

Product	Size (mm)	λ_p (nm)	Carrier Freq. (KHz)	Supply Voltage (V)	I_{CC} Typ (mA)	L_{Center} (m)	L_{45} (m)
IRM-8871M2-F72	10.4x7.5x11.5	940	38	3~5	0.4	8	4



UNIT : mm

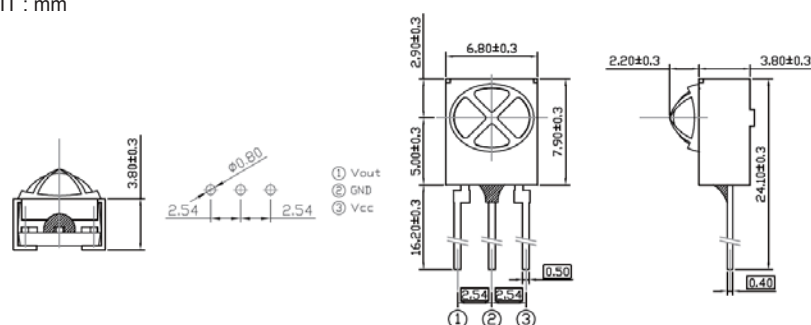


Product	Size (mm)	λ_p (nm)	Carrier Freq. (KHz)	Supply Voltage (V)	I_{CC} Typ (mA)	L_{Center} (m)	L_{45} (m)
IRM-8881M2	7.9x6.8x6.0	940	38	3~5	0.4	8	4


Infrared Receiver Module | Standard Burst | DIP-Vo – Vcc – GND




UNIT : mm

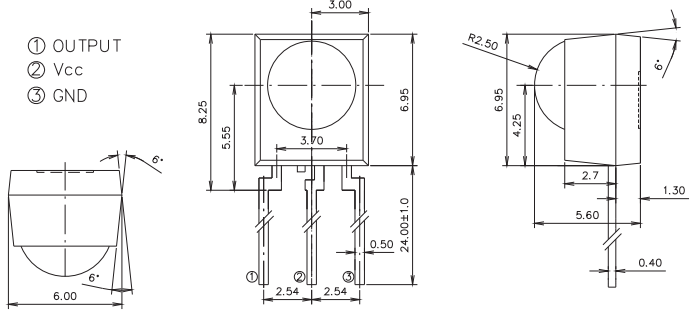

Product	Size (mm)	λ_p (nm)	Carrier Freq. (KHz)	Supply Voltage (V)	I_{CC} Typ (mA)	L_{Center} (m)	L_{45} (m)
IRM-3736M3	8.25x6.0x5.6	940	36	3~5	0.4	14	6
IRM-3738T	8.25x6.0x5.6	940	38	3~5	1.0	14	6
IRM-3738M3	8.25x6.0x5.6	940	38	3~5	0.4	14	6
IRM-3740T	8.25x6.0x5.6	940	40	3~5	1.0	14	6
IRM-3740M2	8.25x6.0x5.6	940	40	3~5	0.4	14	6
IRM-3756M3	8.25x6.0x5.6	940	56	3~5	0.4	14	6
IRM-3756T	8.25x6.0x5.6	940	56	3~5	1.0	14	6

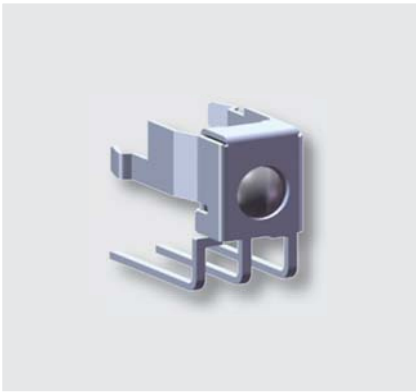


UNIT : mm

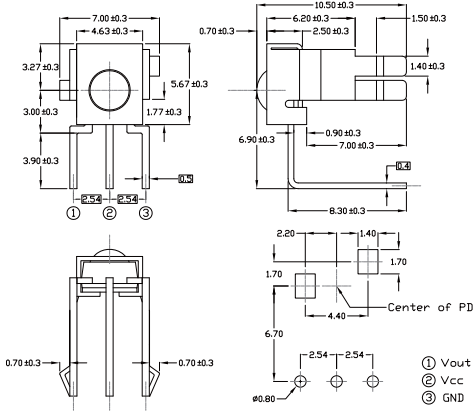


Product	Size (mm)	λ_p (nm)	Carrier Freq. (KHz)	Supply Voltage (V)	I_{CC} Typ (mA)	L_{Center} (m)	L_{45} (m)
IRM-6738M3S47F61	10.2x7.0x6.9	940	38	3~5	0.4	8	5

Infrared Receiver Module | Standard Burst | SMD

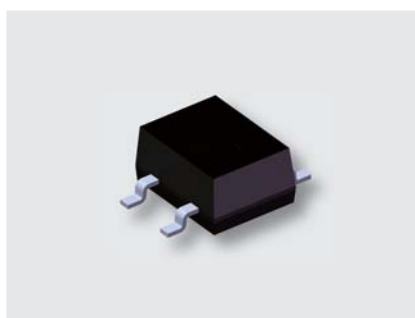


UNIT : mm

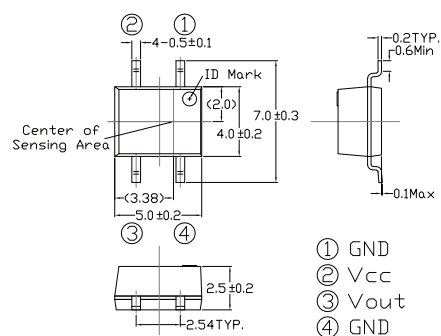

Product	Size (mm)	λ_p (nm)	Carrier Freq. (KHz)	Supply Voltage (V)	I_{CC} Typ (mA)	L_{Center} (m)	L_{45} (m)
IRM-H936M3/TR2	5.0×4.0×2.0	940	36	3~5	0.4	8	5
IRM-H938M3/TR2	5.0×4.0×2.0	940	38	3~5	0.4	8	5



UNIT : mm

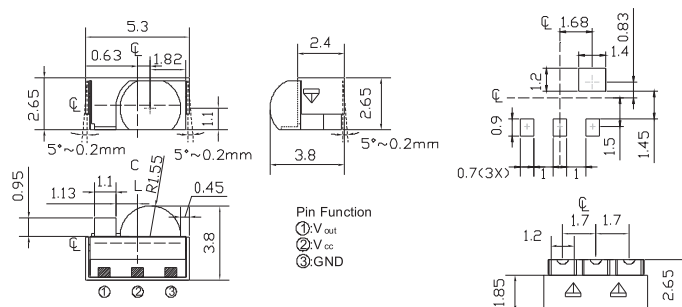


Product	Size (mm)	λ_p (nm)	Carrier Freq. (KHz)	Supply Voltage (V)	I_{CC} Typ (mA)	L_{Center} (m)	L_{45} (m)
IRM-V538M3/TR1	5.3×3.8×2.65	940	36	3~5	0.4	8	5
IRM-V538T/TR1	5.3×3.8×2.65	940	38	3~5	1.0	8	5
IRM-V540M2/TR1	5.3×3.8×2.65	940	40	3~5	0.4	8	5

Infrared Receiver Module | Standard Burst | SMD




UNIT : mm

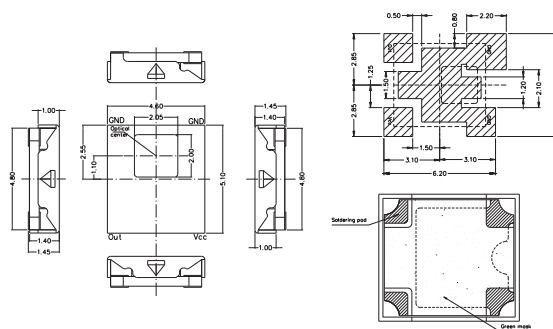

Product	Size (mm)	λ_p (nm)	Carrier Freq. (KHz)	Supply Voltage (V)	I_{CC} Typ (mA)	L_{Center} (m)	L_{45} (m)
IRM-H236T/TR2	5.1×4.6×1.45	940	36	3~5	1.0	8	5
IRM-H238M3/TR2	5.1×4.6×1.45	940	38	3~5	0.4	8	5
IRM-H238T/TR2	5.1×4.6×1.45	940	38	3~5	1.0	8	5
IRM-H240M2/TR2	5.1×4.6×1.45	940	40	3~5	0.4	8	5




UNIT : mm

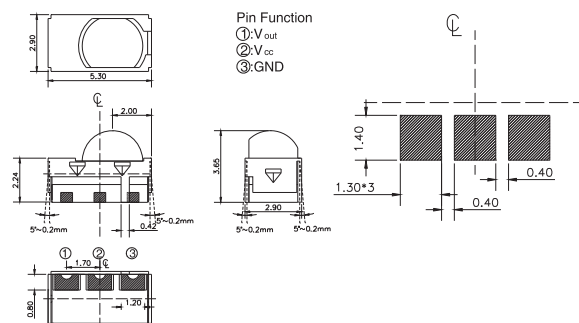

Product	Size (mm)	λ_p (nm)	Carrier Freq. (KHz)	Supply Voltage (V)	I_{CC} Typ (mA)	L_{Center} (m)	L_{45} (m)
IRM-H538T/TR2	5.3×2.9×3.65	940	38	3~5	1.0	8	5



UNIT : mm

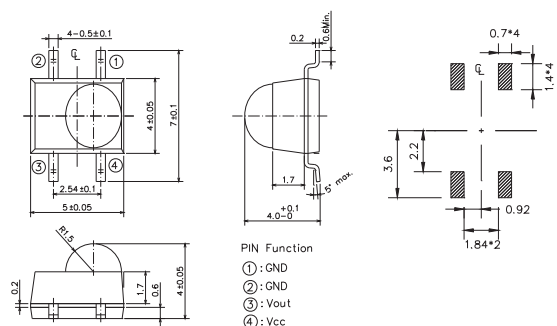


Product	Size (mm)	λ_p (nm)	Carrier Freq. (KHz)	Supply Voltage (V)	I_{CC} Typ (mA)	L_{Center} (m)	L_{45} (m)
IRM-H636M3/TR2	5.0×4.0×4.0	940	36	3~5	0.4	8	5
IRM-H636T/TR2	5.0×4.0×4.0	940	36	3~5	1.0	8	5
IRM-H638M3/TR2	5.0×4.0×4.0	940	38	3~5	0.4	8	5
IRM-H638T/TR2	5.0×4.0×4.0	940	38	3~5	1.0	8	5
IRM-H656T/TR2	5.0×4.0×4.0	940	56	3~5	1.0	8	5

Optic-Fiber Device (Photo Link) | Receiver (PLR) Component




UNIT : mm

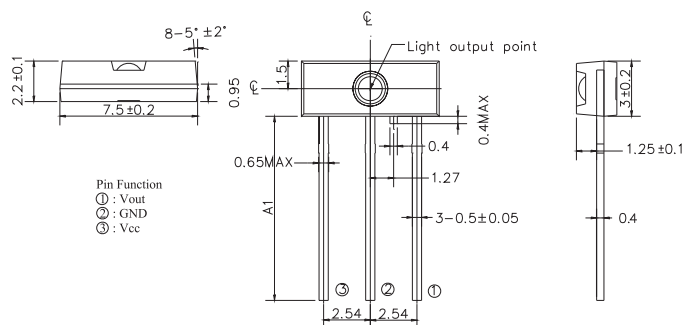

Product	Size (LXWXHmm)	Fiber Coupling Receiver Power_ Max (dBm)	Fiber Coupling Receiver Power_ Min (dBm)	Operation Voltage (V)	Plastic Holder	Trans - mission Speed (Mb/s)	L/F Thicknes (mm)
PLR135	7.5x3.0x2.2	-14	-27	2.4~5.5	None	16	0.4




UNIT : mm

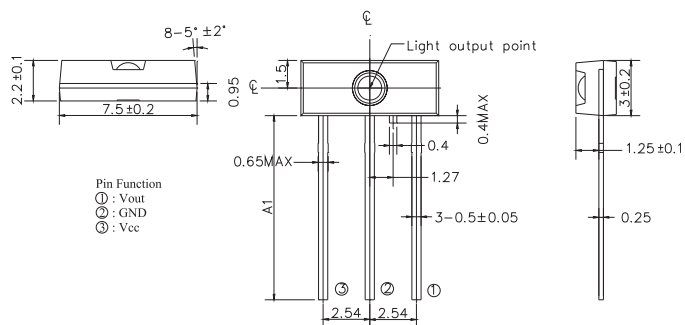

Product	Size (LXWXHmm)	Fiber Coupling Receiver Power_ Max (dBm)	Fiber Coupling Receiver Power_ Min (dBm)	Operation Voltage (V)	Plastic Holder	Trans - mission Speed (Mb/s)	L/F Thicknes (mm)
PLR137	7.5x3.0x2.2	-14	-27	2.4~5.5	None	16	0.25



UNIT : mm

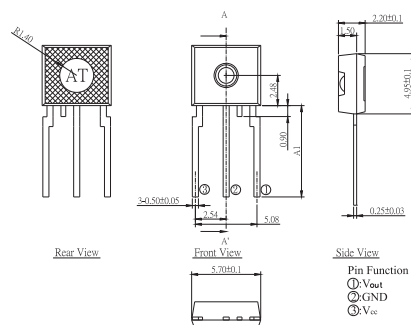


Product	Size (LXWXHmm)	Fiber Coupling Receiver Power_ Max (dBm)	Fiber Coupling Receiver Power_ Min (dBm)	Operation Voltage (V)	Plastic Holder	Trans - mission Speed (Mb/s)	L/F Thicknes (mm)
PLR155	5.70x4.95x2.20	-14	-27	2.4~5.5	None	16	0.25

Optic-Fiber Device (Photo Link) | Receiver (PLR) Component




UNIT : mm

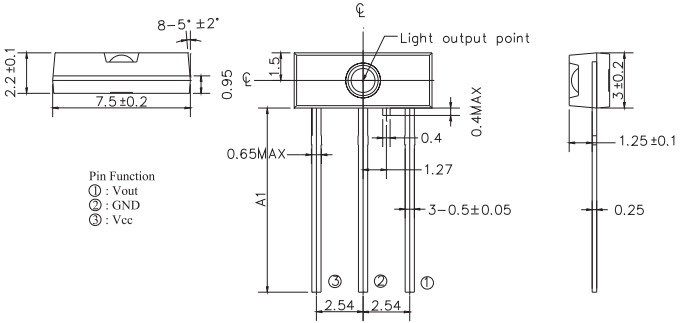

Product	Size (LXWXHmm)	Fiber Coupling Receiver Power_ Max (dBm)	Fiber Coupling Receiver Power_ Min (dBm)	Operation Voltage (V)	Plastic Holder	Trans - mission Speed (Mb/s)	L/F Thicknes (mm)
PLR233	7.5x3.0x2.2	-14	-27	2.4~5.5	None	25	0.4



UNIT : mm

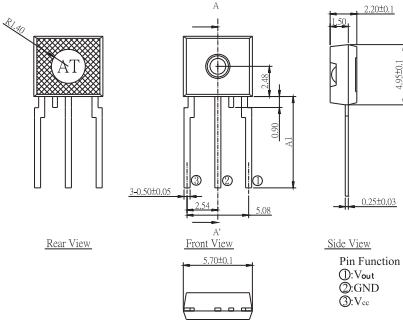


Product	Size (LXWXHmm)	Fiber Coupling Receiver Power_ Max (dBm)	Fiber Coupling Receiver Power_ Min (dBm)	Operation Voltage (V)	Plastic Holder	Trans - mission Speed (Mb/s)	L/F Thicknes (mm)
PLR253	5.70x4.95x2.20	-14	-27	2.4~5.5	None	25	0.25

Optic-Fiber Device (Photo Link) ■ Receiver (PLR) Module




UNIT : mm

Package Dimensions

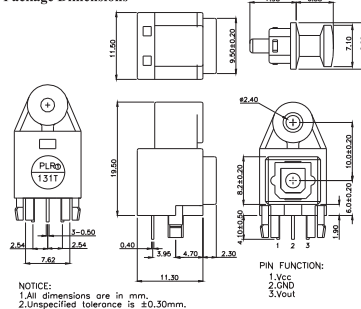

PCB Layout for Electrical Circuit



Notice:


1. Unit:mm
2. PCB tolerance:1.6mm

Product	Size (LXWXHmm)	Fiber Coupling Receiver Power_ Max (dBm)	Fiber Coupling Receiver Power_ Min (dBm)	Operation Voltage (V)	Plastic Holder	Trans - mission Speed (Mb/s)	L/F Thicknes (mm)
PLR135/T	11.5x13.6x19.5	-14	-27	2.4~5.5	Yes	16	0.4




UNIT : mm

Package Dimensions

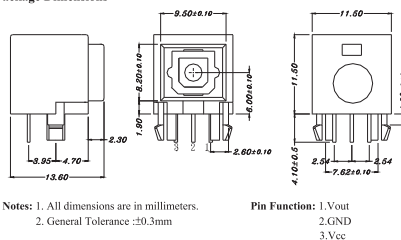

PCB Layout for Electrical Circuit



Notice:


1. Unit:mm
2. PCB tolerance:1.6mm

Product	Size (LXWXHmm)	Fiber Coupling Receiver Power_ Max (dBm)	Fiber Coupling Receiver Power_ Min (dBm)	Operation Voltage (V)	Plastic Holder	Trans - mission Speed (Mb/s)	L/F Thicknes (mm)
PLR135/T1	11.5x13.6x11.5	-14	-27	2.4~5.5	Yes	16	0.4




UNIT : mm

Package Dimensions



PCB Layout for Electrical Circuit



Notice:


1. Unit:mm
2. PCB tolerance:1.6mm

Product	Size (LXWXHmm)	Fiber Coupling Receiver Power_ Max (dBm)	Fiber Coupling Receiver Power_ Min (dBm)	Operation Voltage (V)	Plastic Holder	Trans - mission Speed (Mb/s)	L/F Thicknes (mm)
PLR135/T2	12x14x19	-14	-27	2.4~5.5	Yes	16	0.4

Optic-Fiber Device (Photo Link) ■ Receiver (PLR) Module




UNIT : mm

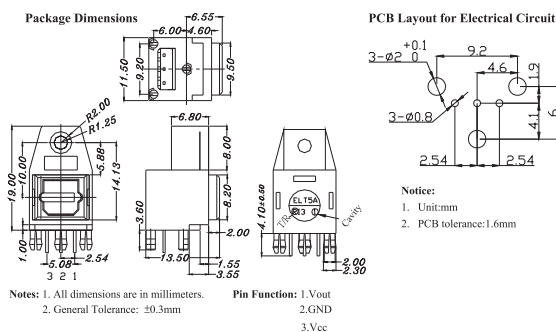

Product	Size (LXWXHmm)	Fiber Coupling Receiver Power_ Max (dBm)	Fiber Coupling Receiver Power_ Min (dBm)	Operation Voltage (V)	Plastic Holder	Trans - mission Speed (Mb/s)	L/F Thickness (mm)
PLR135/T5A	11.5x13.5x19	-14	-27	2.4~5.5	Yes	16	0.4




UNIT : mm

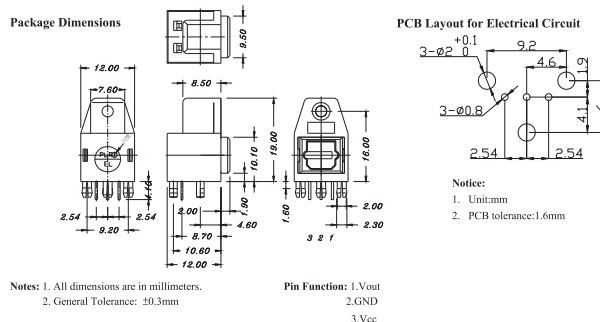

Product	Size (LXWXHmm)	Fiber Coupling Receiver Power_ Max (dBm)	Fiber Coupling Receiver Power_ Min (dBm)	Operation Voltage (V)	Plastic Holder	Trans - mission Speed (Mb/s)	L/F Thickness (mm)
PLR135/T5P	12x14x19	-14	-27	2.4~5.5	Yes	16	0.4



UNIT : mm

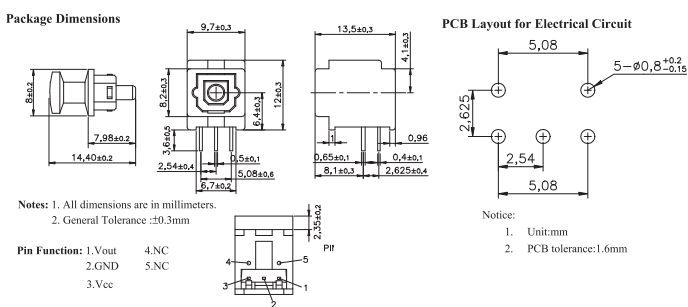


Product	Size (LXWXHmm)	Fiber Coupling Receiver Power_ Max (dBm)	Fiber Coupling Receiver Power_ Min (dBm)	Operation Voltage (V)	Plastic Holder	Trans - mission Speed (Mb/s)	L/F Thickness (mm)
PLR135/T6	9.7x13.5x12	-14	-27	2.4~5.5	Yes	16	0.4


Optic-Fiber Device (Photo Link) ■ Receiver (PLR) Module



UNIT : mm

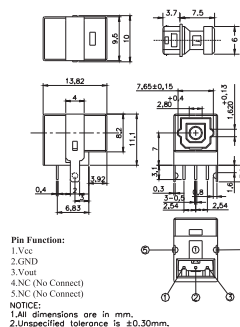

PCB Layout for Electrical Circuit




Notice:
 1. Unit:mm
 2. PCB tolerance:1.6mm


Product	Size (LXWXHmm)	Fiber Coupling Receiver Power_ Max (dBm)	Fiber Coupling Receiver Power_ Min (dBm)	Operation Voltage (V)	Plastic Holder	Trans - mission Speed (Mb/s)	L/F Thicknes (mm)
PLR135/T7	9.9x13.6x11.1	-14	-27	2.4~5.5	Yes	16	0.4



UNIT : mm



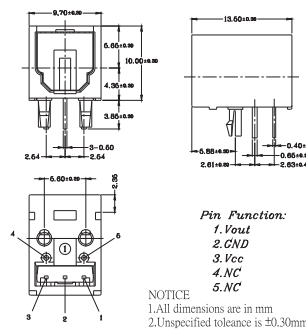


PCB Layout for Electrical Circuit



Notice:
 1. Unit:mm
 2. PCB tolerance:1.6mm


Product	Size (LXWXHmm)	Fiber Coupling Receiver Power_ Max (dBm)	Fiber Coupling Receiver Power_ Min (dBm)	Operation Voltage (V)	Plastic Holder	Trans - mission Speed (Mb/s)	L/F Thicknes (mm)
PLR135/T8	9.7x13.5x10	-14	-27	2.4~5.5	Yes	16	0.4

UNIT : mm

Optic-Fiber Device (Photo Link) | Transmitter (PLT) Component




UNIT : mm

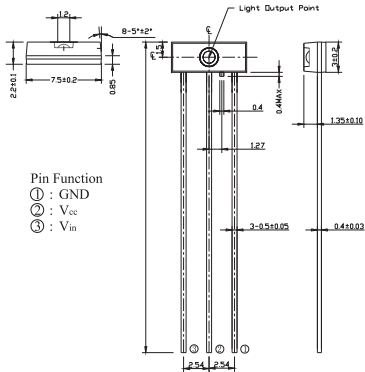

Product	Size (LXWXHmm)	Fiber Coupling Output Power_Max (dBm)	Fiber Coupling Output Power_Min (dBm)	Operation Voltage (V)	Plastic Holder	Trans - mission Speed (Mb/s)	L/F Thicknes (mm)
PLT132	7.5x3.0x2.2	-15	-21	3~5	None	16	0.4




UNIT : mm

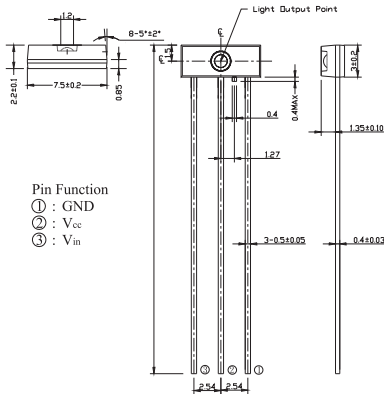

Product	Size (LXWXHmm)	Fiber Coupling Output Power_Max (dBm)	Fiber Coupling Output Power_Min (dBm)	Operation Voltage (V)	Plastic Holder	Trans - mission Speed (Mb/s)	L/F Thicknes (mm)
PLT133	7.5x3.0x2.2	-15	-21	3~5	None	16	0.4



UNIT : mm

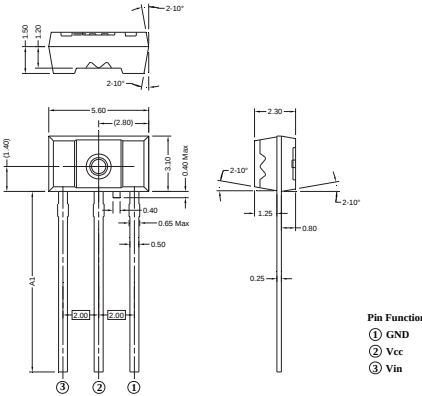


Product	Size (LXWXHmm)	Fiber Coupling Output Power_Max (dBm)	Fiber Coupling Output Power_Min (dBm)	Operation Voltage (V)	Plastic Holder	Trans - mission Speed (Mb/s)	L/F Thicknes (mm)
PLT262	5.6x3.1x2.3	-14	-21	3~5	None	25	0.25

Optic-Fiber Device (Photo Link) ■ Transmitter (PLT) Component




UNIT : mm

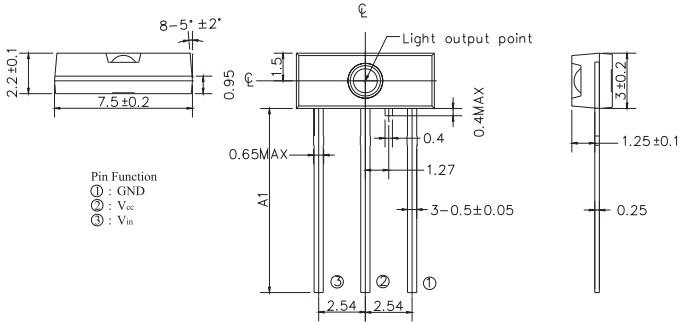

Product	Size (LXWXHmm)	Fiber Coupling Output Power_Max (dBm)	Fiber Coupling Output Power_Min (dBm)	Operation Voltage (V)	Plastic Holder	Trans - mission Speed (Mb/s)	L/F Thicknes (mm)
PLT137	7.5x3.0x2.2	-15	-21	3~5	None	16	0.25
PLT237	7.5x3.0x2.2	-14	-21	3~5	None	25	0.25



UNIT : mm

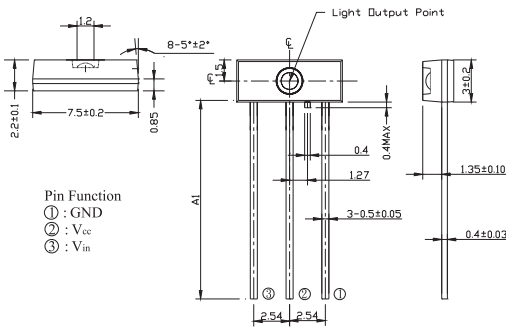


Product	Size (LXWXHmm)	Fiber Coupling Output Power_Max (dBm)	Fiber Coupling Output Power_Min (dBm)	Operation Voltage (V)	Plastic Holder	Trans - mission Speed (Mb/s)	L/F Thicknes (mm)
PLT232/L5	7.5x3.0x2.2	-15	-21	3~5	None	25	0.4

Optic-Fiber Device (Photo Link) | Transmitter (PLT) Module




UNIT : mm

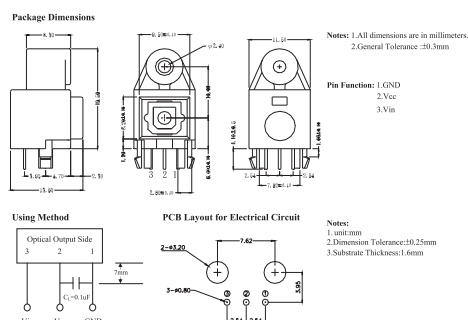

Product	Size (LXWXHmm)	Fiber Coupling Output Power_Max (dBm)	Fiber Coupling Output Power_Min (dBm)	Operation Voltage (V)	Plastic Holder	Trans - mission Speed (Mb/s)	L/F Thickness (mm)
PLT133/T	11.5x13.6x19.5	-15	-21	3~5	Yes	16	0.4




UNIT : mm

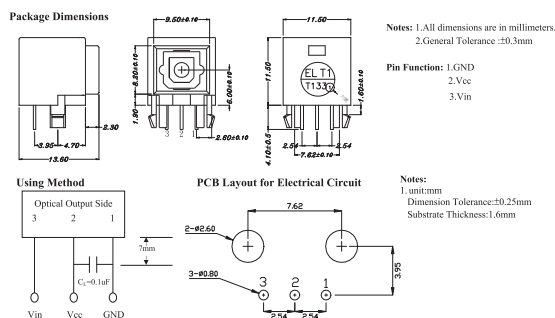

Product	Size (LXWXHmm)	Fiber Coupling Output Power_Max (dBm)	Fiber Coupling Output Power_Min (dBm)	Operation Voltage (V)	Plastic Holder	Trans - mission Speed (Mb/s)	L/F Thickness (mm)
PLT133/T1	11.5x13.6x11.5	-15	-21	3~5	Yes	16	0.4



UNIT : mm

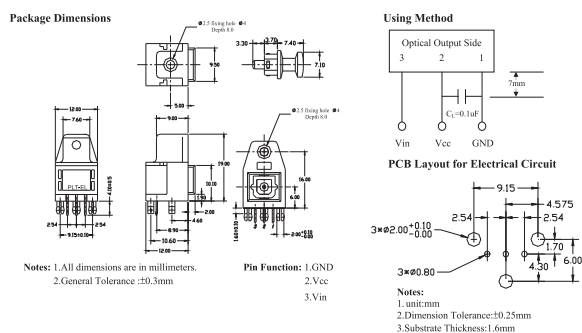


Product	Size (LXWXHmm)	Fiber Coupling Output Power_Max (dBm)	Fiber Coupling Output Power_Min (dBm)	Operation Voltage (V)	Plastic Holder	Trans - mission Speed (Mb/s)	L/F Thickness (mm)
PLT133/T2	12x14x19	-15	-21	3~5	Yes	16	0.4

Optic-Fiber Device (Photo Link) ■ Transmitter (PLT) Module




UNIT : mm


Package Dimensions

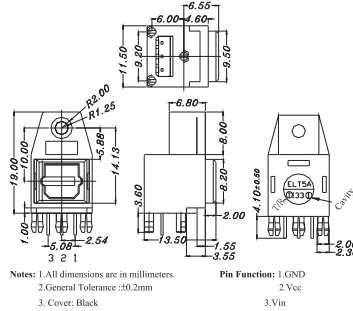

Using Method



PCB Layout for Electrical Circuit




Product	Size (LXWXHmm)	Fiber Coupling Output Power_Max (dBm)	Fiber Coupling Output Power_Min (dBm)	Operation Voltage (V)	Plastic Holder	Trans - mission Speed (Mb/s)	L/F Thickness (mm)
PLT133/T5A	11.5x13.5x19	-15	-21	3~5	Yes	16	0.4




UNIT : mm


Package

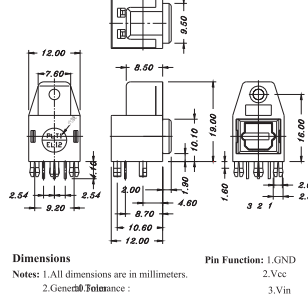

Using Method



PCB Layout for Electrical Circuit




Product	Size (LXWXHmm)	Fiber Coupling Output Power_Max (dBm)	Fiber Coupling Output Power_Min (dBm)	Operation Voltage (V)	Plastic Holder	Trans - mission Speed (Mb/s)	L/F Thickness (mm)
PLT133/T5P	12x14x19	-15	-21	3~5	Yes	16	0.4




UNIT : mm


Package Dimensions

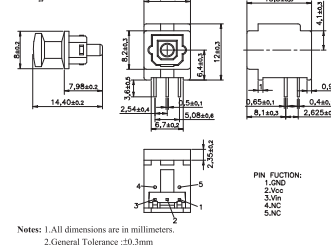

Using Method



PCB Layout for Electrical Circuit




Product	Size (LXWXHmm)	Fiber Coupling Output Power_Max (dBm)	Fiber Coupling Output Power_Min (dBm)	Operation Voltage (V)	Plastic Holder	Trans - mission Speed (Mb/s)	L/F Thickness (mm)
PLT133/T6	9.7x13.5x12	-15	-21	3~5	Yes	16	0.4

Optic-Fiber Device (Photo Link) | Transmitter (PLT) Module




UNIT : mm

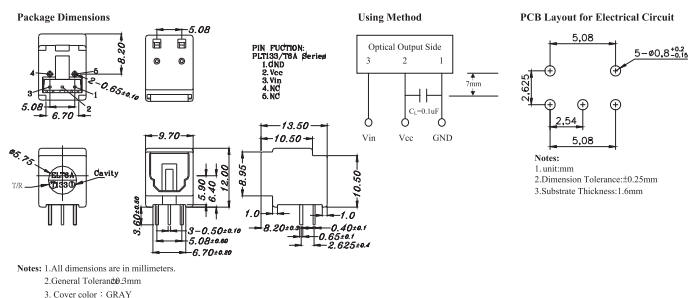

Product	Size (LXWXHmm)	Fiber Coupling Output Power_Max (dBm)	Fiber Coupling Output Power_Min (dBm)	Operation Voltage (V)	Plastic Holder	Trans - mission Speed (Mb/s)	L/F Thickness (mm)
PLT133/T6A	9.7x13.5x12	-15	-21	3~5	Yes	16	0.4




UNIT : mm

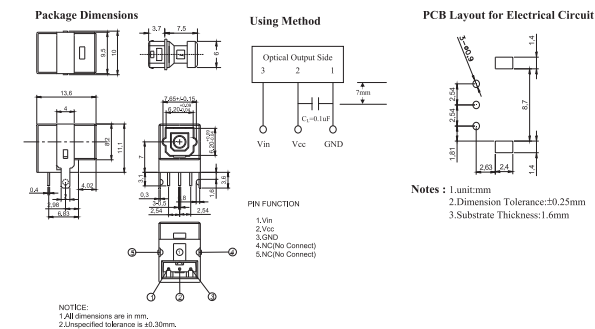

Product	Size (LXWXHmm)	Fiber Coupling Output Power_Max (dBm)	Fiber Coupling Output Power_Min (dBm)	Operation Voltage (V)	Plastic Holder	Trans - mission Speed (Mb/s)	L/F Thickness (mm)
PLT133/T7	9.2x13.6x11.1	-15	-21	3~5	Yes	16	0.4



UNIT : mm

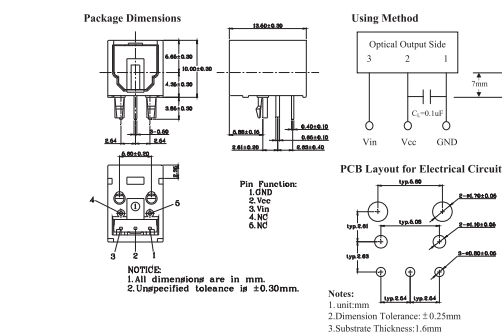


Product	Size (LXWXHmm)	Fiber Coupling Output Power_Max (dBm)	Fiber Coupling Output Power_Min (dBm)	Operation Voltage (V)	Plastic Holder	Trans - mission Speed (Mb/s)	L/F Thickness (mm)
PLT133/T8	9.7x13.5x10	-15	-21	3~5	Yes	16	0.4

Optic-Fiber Device (Photo Link) ■ Transmitter (PLT) Module




UNIT : mm

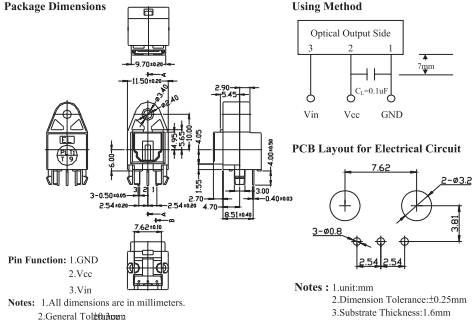

Product	Size (LXWXHmm)	Fiber Coupling Output Power_Max (dBm)	Fiber Coupling Output Power_Min (dBm)	Operation Voltage (V)	Plastic Holder	Trans - mission Speed (Mb/s)	L/F Thicknes (mm)
PLT133/T9	11.5x13.7x20	-15	-21	3~5	Yes	16	0.4



UNIT : mm

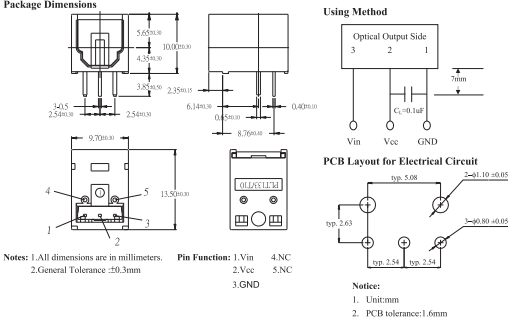


Product	Size (LXWXHmm)	Fiber Coupling Output Power_Max (dBm)	Fiber Coupling Output Power_Min (dBm)	Operation Voltage (V)	Plastic Holder	Trans - mission Speed (Mb/s)	L/F Thicknes (mm)
PLT133/T10W	9.7x13.5x10	-15	-21	3~5	Yes	16	0.4


Optical Sensors | Ambient Light Sensor | Analog




UNIT : mm

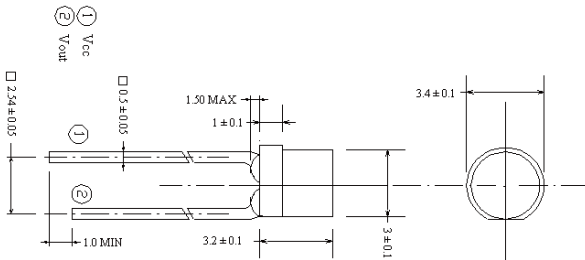

Product	Size (mm)	Supply Voltage (V)	Sensitivity λ_p (nm)	Range λ (nm)	Light current (uA) Ev=100lux	I _{D_Max} (μA)	Rise / Fall Time (μs)
ALS-PDIC144-6C/L378	3 Ø	1.8~5.5	550	390~700	33	0.1	360 / 1130

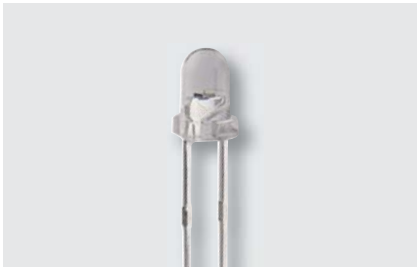

UNIT : mm

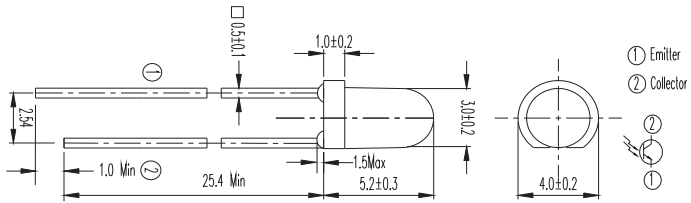


Product	Size (mm)	Supply Voltage (V)	Sensitivity λ_p (nm)	Range λ (nm)	Light current (uA) Ev=100lux	I _{D_Max} (μA)	Rise / Fall Time (μs)
ALS-PT204-6C/L177	3 Ø	2.5~5.5	630	370~670	90	0.1	110 / 220

Optical Sensors | Ambient Light Sensor | Analog




UNIT : mm

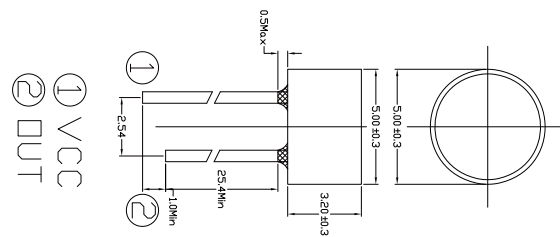


Product	Size (mm)	Supply Voltage (V)	Sensitivity λ_p (nm)	Range λ (nm)	Light current (uA) Ev=100lux	I _{D_Max} (μA)	Rise / Fall Time (μs)
ALS-PDIC243-3B	5 Ø	1.8~5.5	560	390~700	10~30	0.1	110 / 220




UNIT : mm

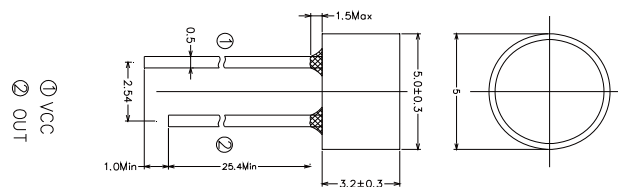

Product	Size (mm)	Supply Voltage (V)	Sensitivity λ_p (nm)	Range λ (nm)	Light current (uA) Ev=100lux	I _{D_Max} (μA)	Rise / Fall Time (μs)
ALS-PDIC243-3C	5 Ø	2.5~5.5	560	390~700	70	0.1	360 / 1130

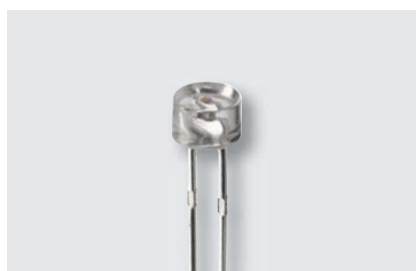

UNIT : mm

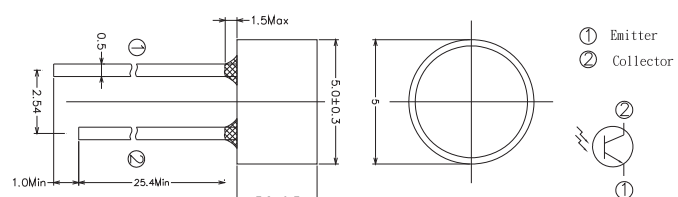


Product	Size (mm)	Supply Voltage (V)	Sensitivity λ_p (nm)	Range λ (nm)	Light current (uA) Ev=100lux	I _{D_Max} (μA)	Rise / Fall Time (μs)
ALS-PT243-3C/L177	5 Ø	2.5~5.5	630	390~700	10	0.1	110 / 220


Optical Sensors | Ambient Light Sensor | Analog




UNIT : mm

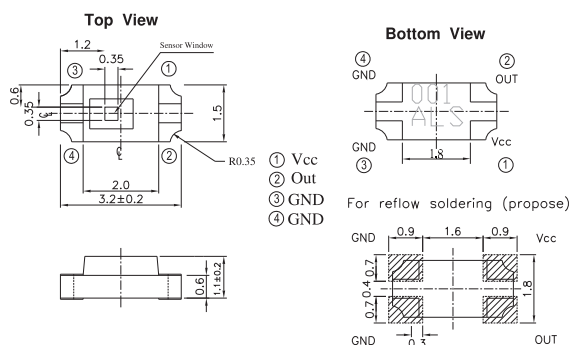

Product	Size (LXWXHmm)	Supply Voltage (V)	Sensitivity λ_p (nm)	Range λ (nm)	Light current (μA) $E_v=100lux$	I_{D_Max} (μA)
ALS-PDIC15-21B/TR8	3.2x1.5x1.1	1.5~5.5	580	390~700	17	0.1

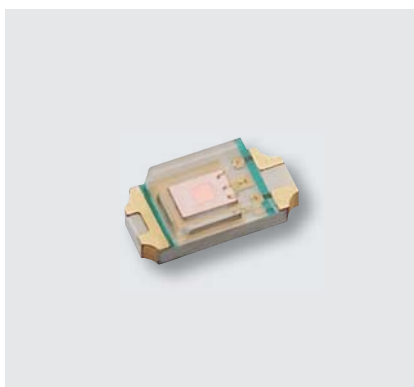


UNIT : mm

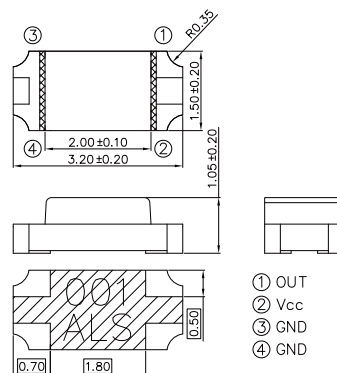

Product	Size (LXWXHmm)	Supply Voltage (V)	Sensitivity λ_p (nm)	Range λ (nm)	Light current (μA) $E_v=100lux$	I_{D_Max} (μA)
ALS-PDIC15-21C/L230/TR8	3.2x1.5x1.1	2.5~5.5	590	390~700	36~95	0.1




UNIT : mm

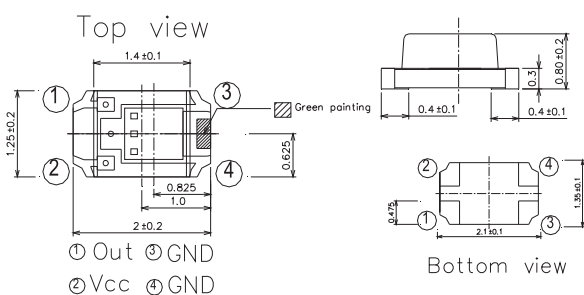


Product	Size (LXWXHmm)	Supply Voltage (V)	Sensitivity λ_p (nm)	Range λ (nm)	Light current (μA) $E_v=100lux$	I_{D_Max} (μA)
ALS-PDIC17-55C/TR8	2x1.25x0.8	1.8~5.5	590	390~700	60	0.1


Optical Sensors | Ambient Light Sensor | Analog

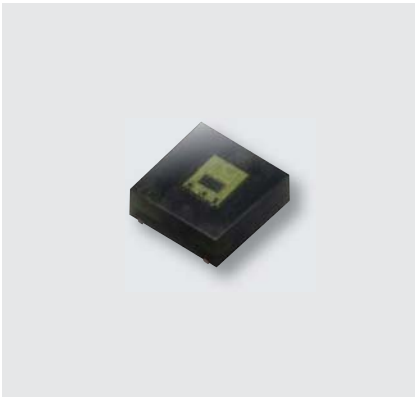


UNIT : mm

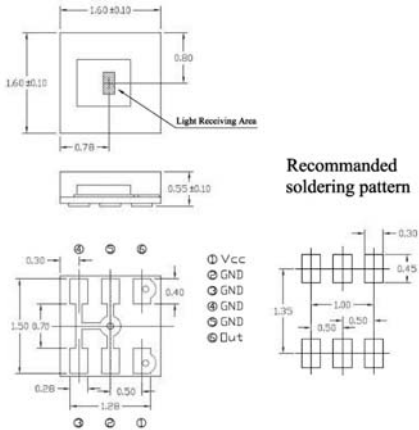

Product	Size (LXWXHmm)	Supply Voltage (V)	Sensitivity λ_p (nm)	Range λ (nm)	Light current (μA) $E_v=100\text{lux}$	I_{D_Max} (μA)
ALS-PDIC17-77B/TR8	1.6x1.6x0.55	1.8~5.5	580	390~700	60	0.1

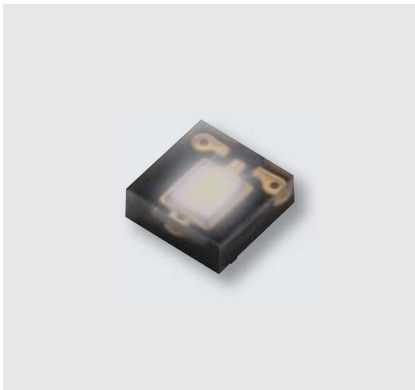


UNIT : mm

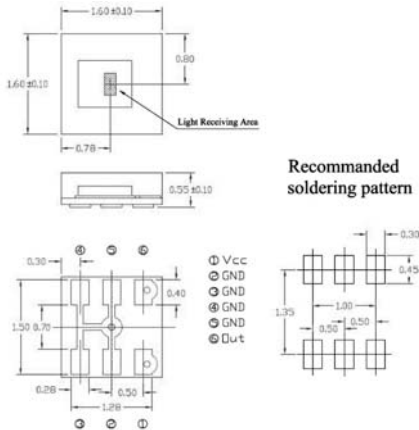

Product	Size (LXWXHmm)	Supply Voltage (V)	Sensitivity λ_p (nm)	Range λ (nm)	Light current (μA) $E_v=100\text{lux}$	I_{D_Max} (μA)
ALS-PDIC17-77C/TR8	1.6x1.6x0.55	1.8~5.5	550	390~700	40	0.1




UNIT : mm

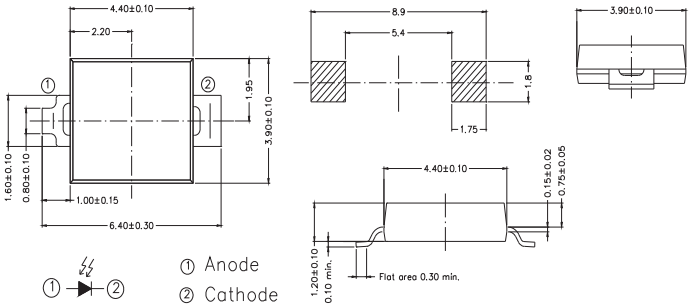


Product	Size (LXWXHmm)	Supply Voltage (V)	Sensitivity λ_p (nm)	Range λ (nm)	Light current (μA) $E_v=100\text{lux}$	I_{D_Max} (μA)
ALS-PD70-01C/TR7	4.4x3.9x1.2	2.5~5.5	630	390~700	1.1	0.01


Optical Sensors | Ambient Light Sensor | Analog

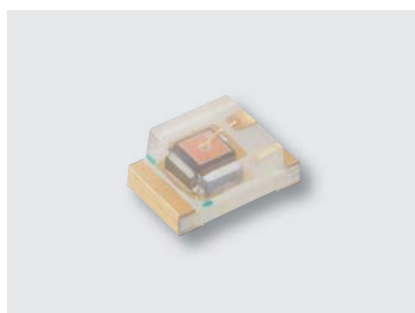


UNIT : mm

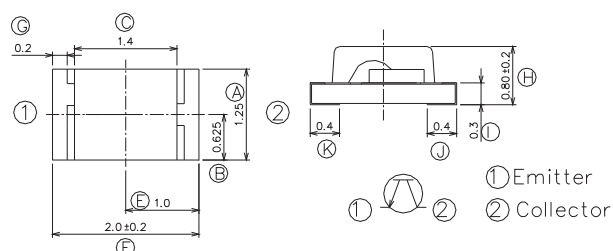

Product	Size (LXWXHmm)	Supply Voltage (V)	Sensitivity λ_p (nm)	Range λ (nm)	Light current (μA) $E_v=100\text{lux}$	I_{D_Max} (μA)	Rise / Fall Time (μs)
ALS-PT17-51C/L177/TR8	2x1.25x0.8	2.5~5.5	630	390~700	15	0.1	110 / 220

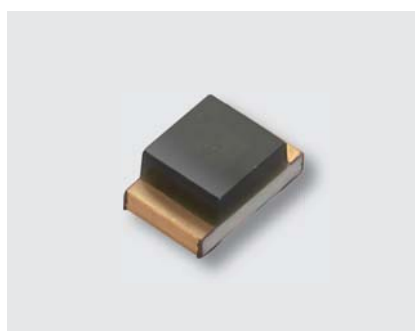


UNIT : mm

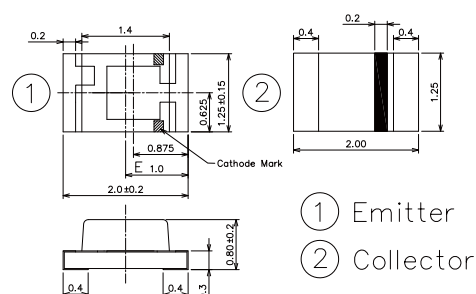

Product	Size (LXWXHmm)	Supply Voltage (V)	Sensitivity λ_p (nm)	Range λ (nm)	Light current (μA) $E_v=50\text{lux}$	I_{D_Max} (μA)	Rise / Fall Time (μs)
ALS-PT17-51NB/L369/TR8	2x1.25x0.8	2.5~5.5	580	400~700	5.5	0.1	110 / 220



UNIT : mm

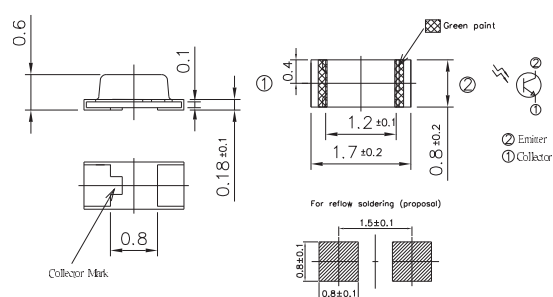


Product	Size (LXWXHmm)	Supply Voltage (V)	Sensitivity λ_p (nm)	Range λ (nm)	Light current (μA) $E_v=100\text{lux}$	I_{D_Max} (μA)	Rise / Fall Time (μs)
ALS-PT19-315C/L177/TR8	1.7x0.8x0.6	2.5~5.5	630	390~700	10	0.1	110 / 220

Optical Sensors | Ambient Light Sensor | Digital




UNIT : mm

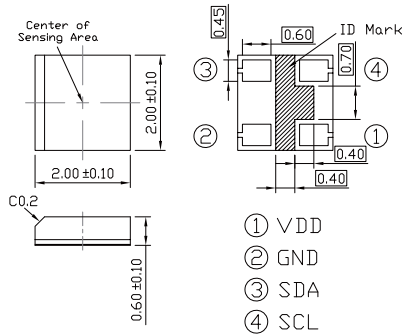

Product	Size (LXWXHmm)	Resolution (bit)	Interface	Peak sensitivity (nm)	Detection range (lux)
ALS-PDIC17-57B/TR8	2.0x2.0x0.55	15	I ² C	580	88,000




UNIT : mm

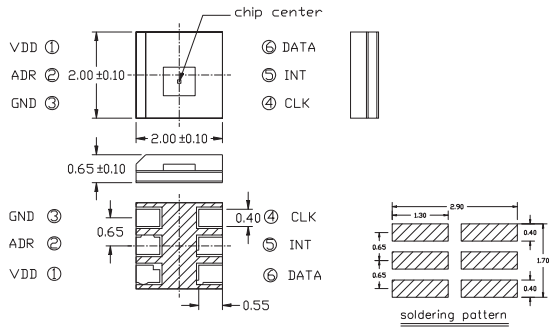


Product	Size (LXWXHmm)	Resolution (bit)	Interface	Peak sensitivity (nm)	Detection range (lux)
ALS-PDIC17-79NB/TR8	2.0x2.0x0.65	15	I ² C	550	88,000


Optical Sensors | Proximity Sensor | Digital

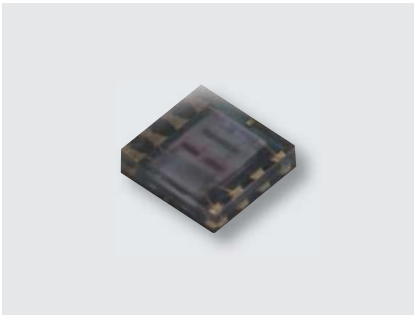


UNIT : mm

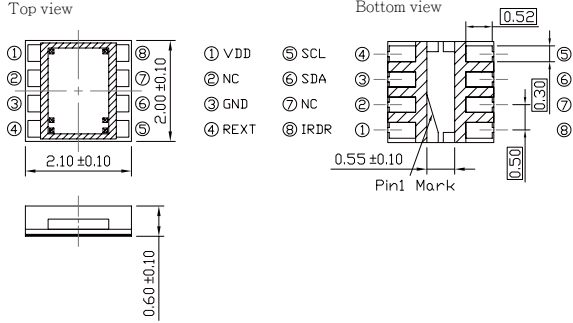

Product	Size (LXWXHmm)	Resolution (bit)	Interface	Ambient Light Detection range (lux)	IR LED Driving current (mA)
APS-12D-1-02/TR8	2.1 x 2.0 x 0.6	12	I ² C	0.24~64000	6.25 / 12.5 / 25 / 50

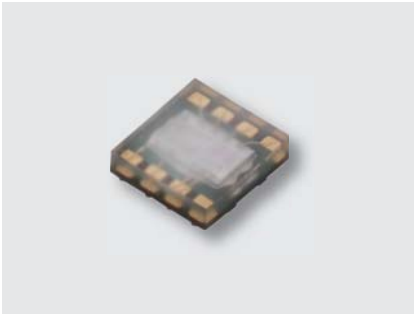


UNIT : mm

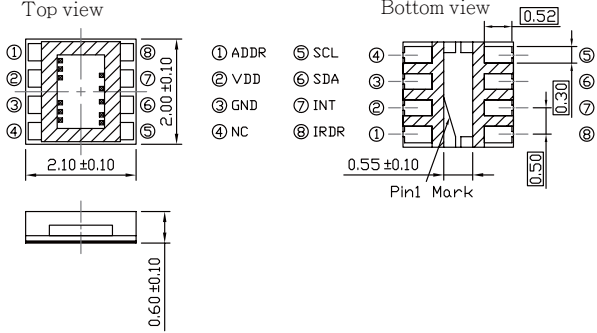


Product	Size (LXWXHmm)	Resolution (bit)	Interface	Ambient Light Detection range (lux)	IR LED Driving current (mA)
APS-16D25-11-DF8/TR8	2.1x2.0x0.6	16 / 8	I ² C	0.11~57671	100/200


Optical Sensors ■ RGB Color Sensor ■ Single Color Sensor (Analog)

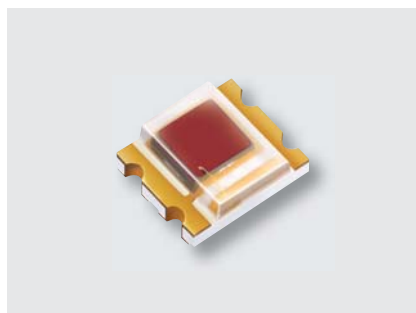


UNIT : mm

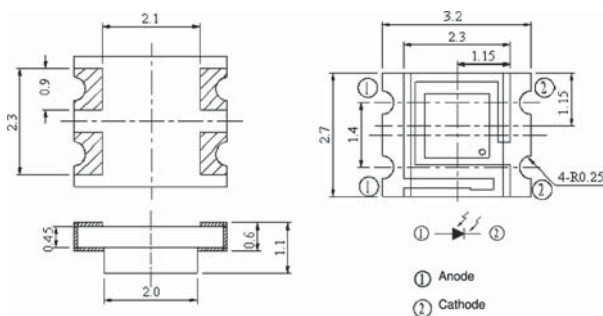


Product	Size (LXWXHmm)	Sensitivity λ_p (nm)	V_F (V)	Revers light current ($E_e=100\text{lux}$) / $IL^{(1)}$ (μA)	Revers light current ($E_e=1000\text{lux}$) $IL^{(2)}$ (μA)
CLS15-22C/L213R/TR8	3.2x2.7x1.1	620	0.5~1.3	0.091	0.83

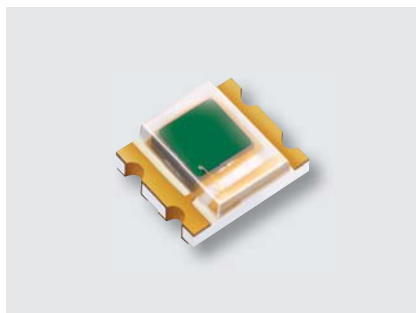


UNIT : mm

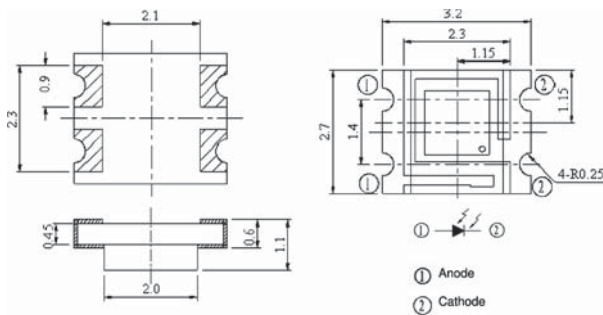

Product	Size (LXWXHmm)	Sensitivity λ_p (nm)	V_F (V)	Revers light current ($E_e=100\text{lux}$) / $IL^{(1)}$ (μA)	Revers light current ($E_e=1000\text{lux}$) $IL^{(2)}$ (μA)
CLS15-22C/L213G/TR8	3.2x2.7x1.1	550	0.5~1.3	0.082	0.72

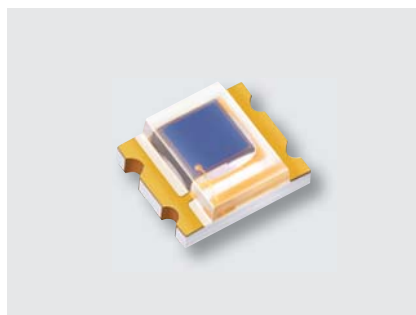

UNIT : mm

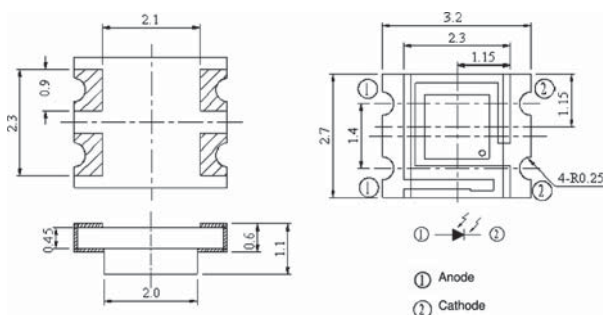


Product	Size (LXWXHmm)	Sensitivity λ_p (nm)	V_F (V)	Revers light current ($E_e=100\text{lux}$) / $IL^{(1)}$ (μA)	Revers light current ($E_e=1000\text{lux}$) $IL^{(2)}$ (μA)
CLS15-22C/L213B/TR8	3.2x2.7x1.1	470	0.5~1.3	0.046	0.39

Optical Sensors | Reflective Sensor



UNIT : mm

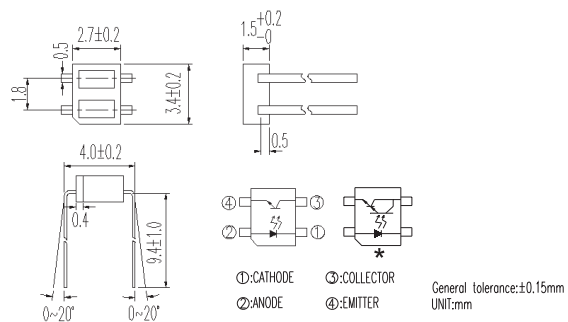


Product	Size (LXWXHmm)	V _{F_Typ} (V)	V _{F_Max} (V)	V _{CE(SAT)_Max} (V)	I _{C(ON)_Min} (mA)	I _{CEO_Max.} (nA)
ITR8307/F43	3.4x2.7x1.5	1.2	1.6	0.4	0.1	100
*ITR8307/L24/F43	3.4x2.7x1.5	1.2	1.4	--	0.5	1000

Star mark * : Please refer to the schematic of Pin configuration with " * " mark.



UNIT : mm

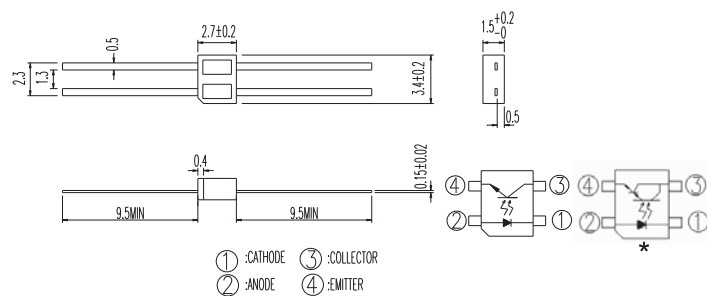


Product	Size (LXWXHmm)	V _{F_Typ} (V)	V _{F_Max} (V)	V _{CE(SAT)_Max} (V)	I _{C(ON)_Min} (mA)	I _{CEO_Max.} (nA)
ITR8307	3.4x2.7x1.5	1.2	1.6	0.4	0.1	100
*ITR8307/L24	3.4x2.7x1.5	1.2	1.4	--	0.5	1000

Star mark * : Please refer to the schematic of Pin configuration with " * " mark.



UNIT : mm

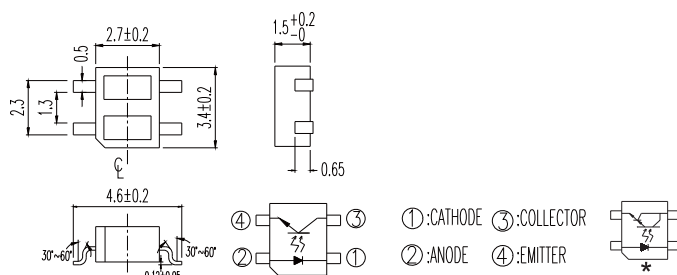


Product	Size (LXWXHmm)	V _{F_Typ} (V)	V _{F_Max} (V)	V _{CE(SAT)_Max} (V)	I _{C(ON)_Min} (mA)	I _{CEO_Max.} (nA)
*ITR8307/L24/TR8	3.4x2.7x1.5	1.2	1.4	--	0.5	1000
ITR8307/TR8	3.4x2.7x1.5	1.2	1.6	0.4	0.1	100

Star mark * : Please refer to the schematic of Pin configuration with " * " mark.

Optical Sensors | Reflective Sensor




UNIT : mm

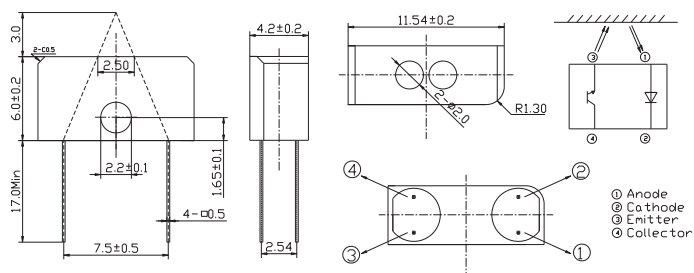

Product	Size (LXWXHmm)	V _{F_Typ} (V)	V _{F_Max} (V)	V _{CE(SAT)_Max} (V)	I _{C(ON)_Min} (mA)	I _{CEO_Max.} (nA)
ITR9904	11.54x4.2x6.0	1.2	1.5	0.4	0.1	100




UNIT : mm

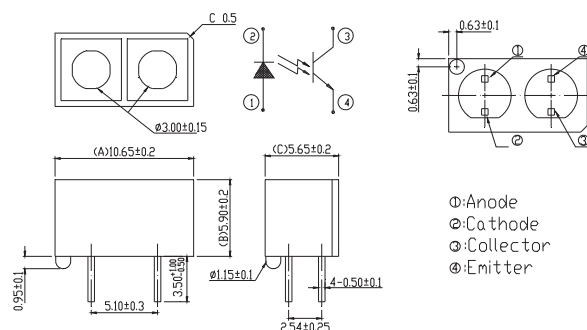

Product	Size (LXWXHmm)	V _{F_Typ} (V)	V _{F_Max} (V)	V _{CE(SAT)_Max} (V)	I _{C(ON)_Min} (mA)	I _{CEO_Max.} (nA)
ITR9908	10.65x5.65x5.9	1.2	1.5	0.4	0.5	100



UNIT : mm

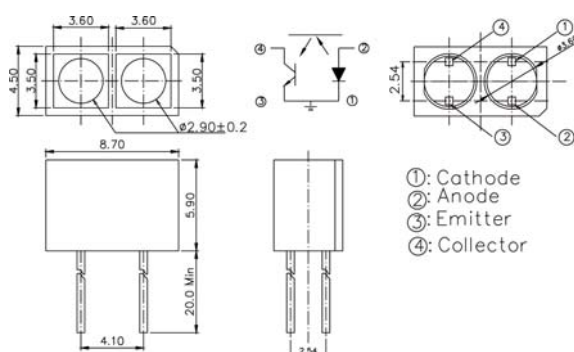


Product	Size (LXWXHmm)	V _{F_Typ} (V)	V _{F_Max} (V)	V _{CE(SAT)_Max} (V)	I _{C(ON)_Min} (mA)	I _{CEO_Max.} (nA)
ITR9909	8.7x4.5x5.9	1.2	1.5	0.4	0.2	100

Optical Sensors | Reflective Sensor




UNIT : mm

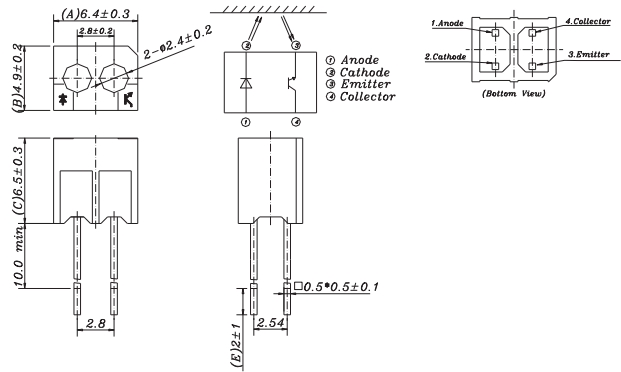

Product	Size (LXWXHmm)	V _{F_Typ} (V)	V _{F_Max} (V)	V _{CE(SAT)_Max} (V)	I _{C(ON)_Min} (mA)	I _{CEO_Max.} (nA)
ITR20001/T	6.4x4.9x6.5	1.2	1.5	0.4	0.2	100



UNIT : mm

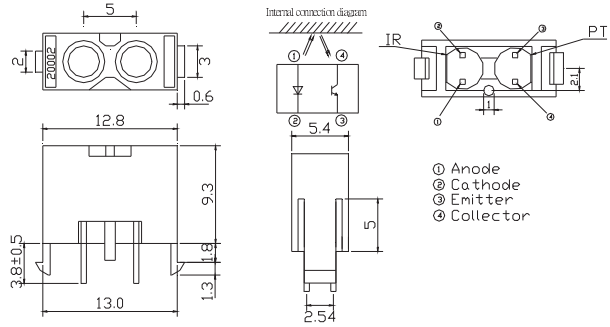


Product	Size (LXWXHmm)	V _{F_Typ} (V)	V _{F_Max} (V)	V _{CE(SAT)_Max} (V)	I _{C(ON)_Min} (mA)	I _{CEO_Max.} (nA)
ITR20002	12.8x5.5x9.3	1.2	1.5	0.4	0.2	100

Optical Sensors | Reflective Sensor




UNIT : mm

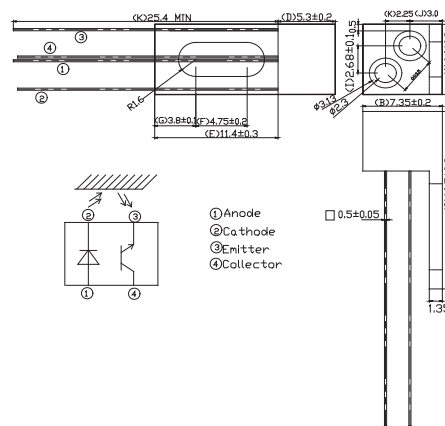

Product	Size (LXWXHmm)	V _{F_Typ} (V)	V _{F_Max} (V)	V _{CE(SAT)_Max} (V)	I _{C(ON)_Min} (mA)	I _{CEO_Max.} (nA)
ITR20501	7.35x6.6x5.3	1.2	1.5	0.4	0.02	100




UNIT : mm

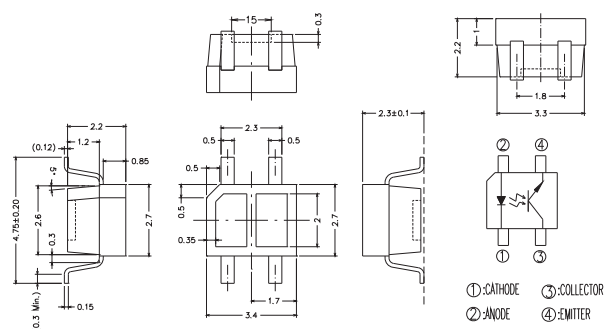

Product	Size (LXWXHmm)	V _{F_Typ} (V)	V _{F_Max} (V)	V _{CE(SAT)_Max} (V)	I _{C(ON)_Min} (mA)	I _{CEO_Max.} (nA)
ITR20510/TR8	3.4x2.7x2.2	1.2	1.6	0.4	0.1	100



UNIT : mm

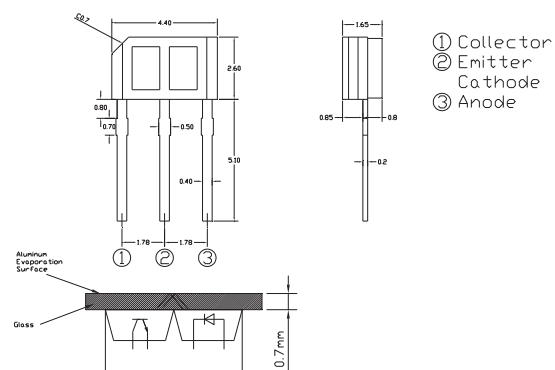


Product	Size (LXWXHmm)	V _{F_Typ} (V)	V _{F_Max} (V)	V _{CE(SAT)_Max} (V)	I _{C(ON)_Min} (mA)	I _{CEO_Max.} (nA)
ITR20904	4.4x2.6x1.65	--	1.4	--	0.05	200

Optical Sensors | Transmissive Sensor

PRELIMINARY




UNIT : mm

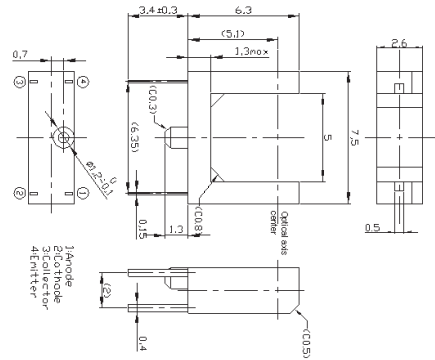

Product	Size (LXWXHmm)	V _{F_Typ} (V)	V _{F_Max} (V)	V _{CE(SAT)_Max} (V)	I _{C(ON)_Min} (mA)	I _{CEO_Max.} (nA)	Gap Distance (mm)
ITR1203DT50A/TB	7.5x2.6x6.3	1.18	1.4	0.4	0.25	5.0	5




UNIT : mm

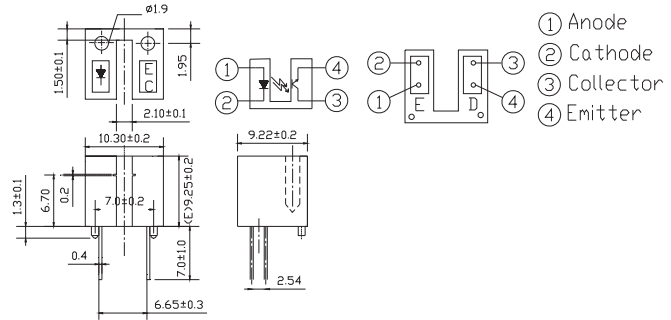


Product	Size (LXWXHmm)	V _{F_Typ} (V)	V _{F_Max} (V)	V _{CE(SAT)_Max} (V)	I _{C(ON)_Min} (mA)	I _{CEO_Max.} (nA)	Gap Distance (mm)
ITR8010	10.3x9.22x9.25	1.2	1.5	0.4	0.9	100	2.1


Optical Sensors | Transmissive Sensor

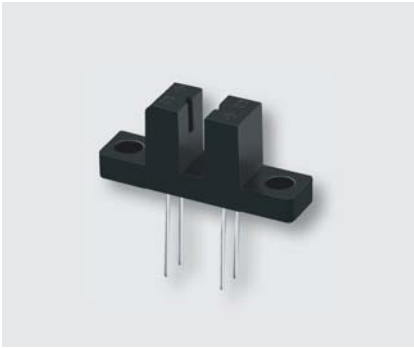


UNIT : mm

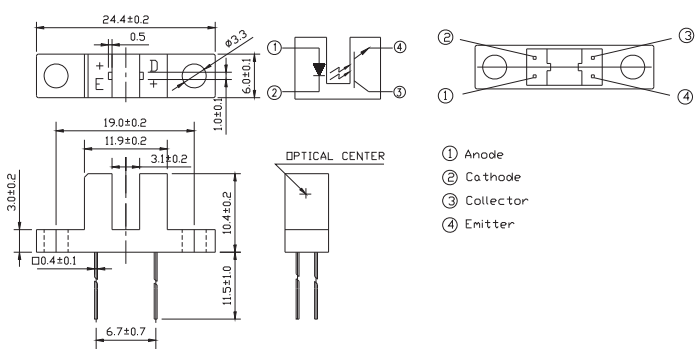

Product	Size (LXWXHmm)	V _{F_Typ} (V)	V _{F_Max} (V)	V _{CE(SAT)_Max} (V)	I _{C(ON)_Min} (mA)	I _{CEO_Max.} (nA)	Gap Distance (mm)
ITR8102	24.4x6.0x10.4	1.2	1.5	0.4	0.9	100	3

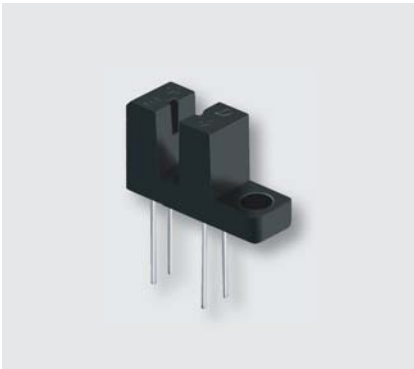


UNIT : mm

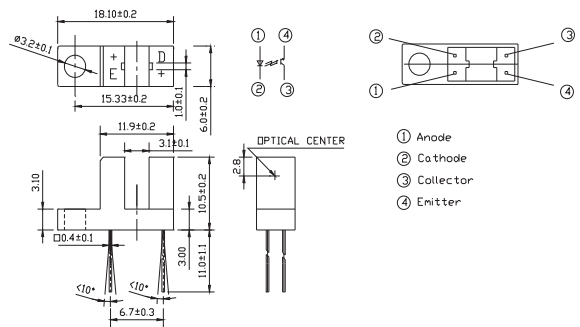


Product	Size (LXWXHmm)	V _{F_Typ} (V)	V _{F_Max} (V)	V _{CE(SAT)_Max} (V)	I _{C(ON)_Min} (mA)	I _{CEO_Max.} (nA)	Gap Distance (mm)
ITR8104	18.1x6.0x10.5	1.2	1.5	0.4	0.9	100	3


Optical Sensors | Transmissive Sensor

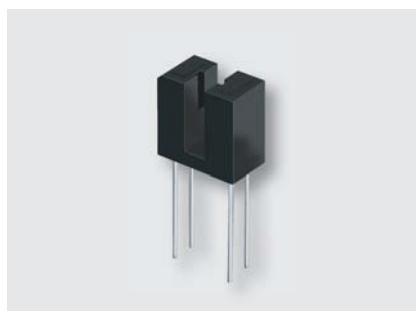


UNIT : mm

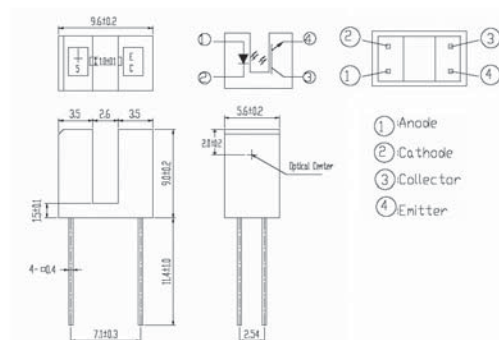

Product	Size (LXWXHmm)	V _{F_Typ} (V)	V _{F_Max} (V)	V _{CE(SAT)_Max} (V)	I _{C(ON)_Min} (mA)	I _{CEO_Max.} (nA)	Gap Distance (mm)
ITR8105	9.6x5.6x9.0	1.2	1.6	0.4	1	100	2.6

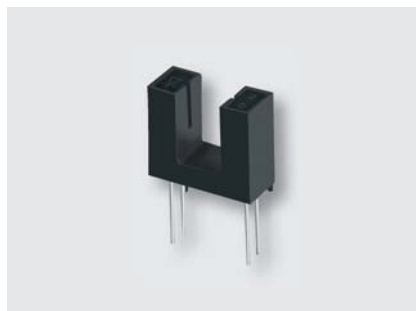


UNIT : mm

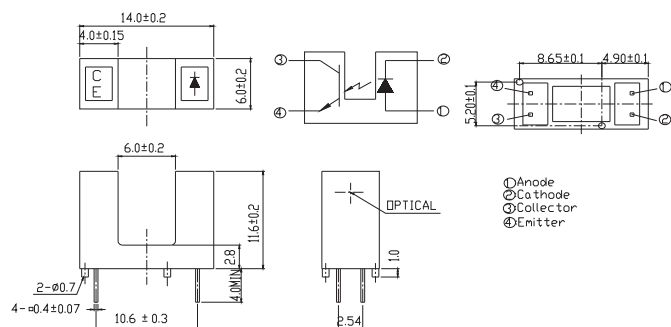

Product	Size (LXWXHmm)	V _{F_Typ} (V)	V _{F_Max} (V)	V _{CE(SAT)_Max} (V)	I _{C(ON)_Min} (mA)	I _{CEO_Max.} (nA)	Gap Distance (mm)
ITR8402-F-A	14.0x6.0x11.6	1.2	1.5	0.4	0.5	100	6



UNIT : mm

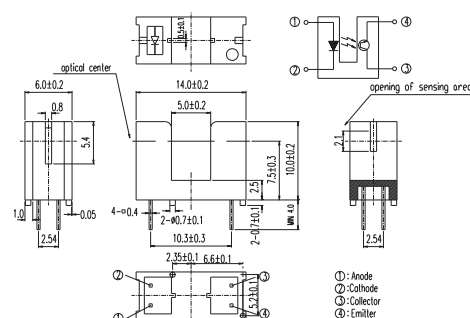


Product	Size (LXWXHmm)	V _{F_Typ} (V)	V _{F_Max} (V)	V _{CE(SAT)_Max} (V)	I _{C(ON)_Min} (mA)	I _{CEO_Max.} (nA)	Gap Distance (mm)
ITR9606-F	14.0x6.0x10.0	1.2	1.5	0.4	0.5	100	5

Optical Sensors | Transmissive Sensor




UNIT : mm

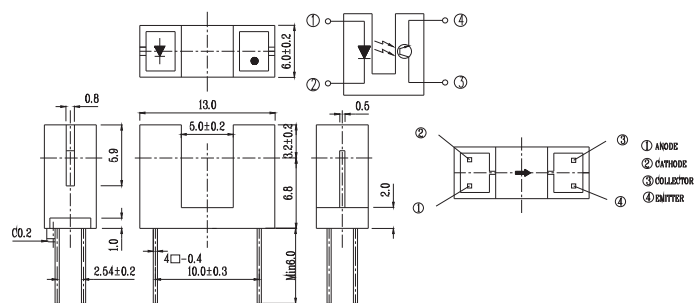

Product	Size (LXWXHmm)	V _{F_Typ} (V)	V _{F_Max} (V)	V _{CE(SAT)_Max} (V)	I _{C(ON)_Min} (mA)	I _{CEO_Max.} (nA)	Gap Distance (mm)
ITR9608-F	13.0x6.0x10.0	1.2	1.5	0.4	0.5	100	5




UNIT : mm

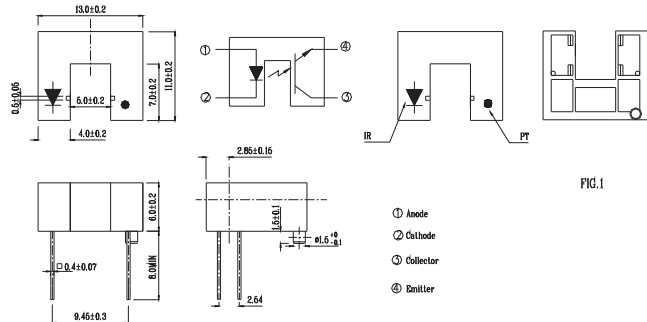

Product	Size (LXWXHmm)	V _{F_Typ} (V)	V _{F_Max} (V)	V _{CE(SAT)_Max} (V)	I _{C(ON)_Min} (mA)	I _{CEO_Max.} (nA)	Gap Distance (mm)
ITR9702-F	13.0x11.0x6.0	1.2	1.5	0.4	0.5	100	4



UNIT : mm

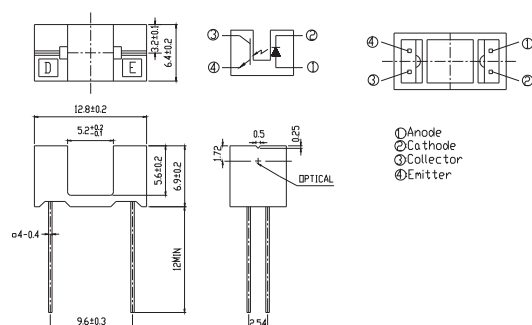


Product	Size (LXWXHmm)	V _{F_Typ} (V)	V _{F_Max} (V)	V _{CE(SAT)_Max} (V)	I _{C(ON)_Min} (mA)	I _{CEO_Max.} (nA)	Gap Distance (mm)
ITR9707	12.8x6.4x6.9	1.2	1.5	0.4	0.5	100	5.2


Optical Sensors | Transmissive Sensor




UNIT : mm

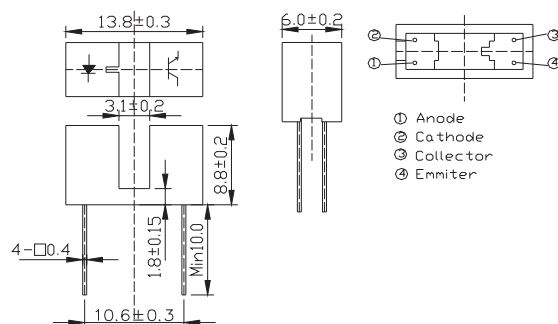

Product	Size (LXWXHmm)	V _{F_Typ} (V)	V _{F_Max} (V)	V _{CE(SAT)_Max} (V)	I _{C(ON)_Min} (mA)	I _{CEO_Max.} (nA)	Gap Distance (mm)
ITR9803	13.8x6.0x8.8	1.2	1.6	0.4	0.5	100	3.1

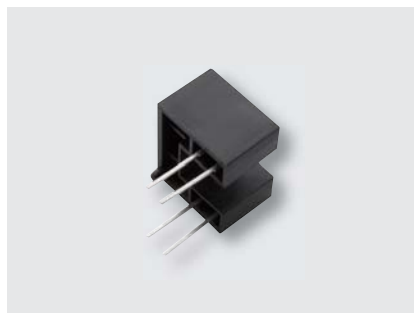


UNIT : mm

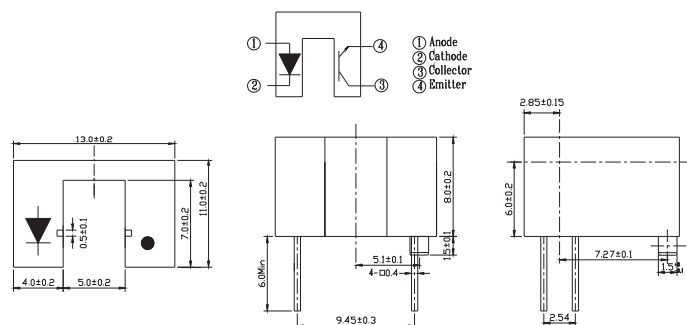

Product	Size (LXWXHmm)	V _{F_Typ} (V)	V _{F_Max} (V)	V _{CE(SAT)_Max} (V)	I _{C(ON)_Min} (mA)	I _{CEO_Max.} (nA)	Gap Distance (mm)
ITR9809-F/T	11.54x4.2x6.0	1.2	1.5	0.4	1	100	5




UNIT : mm

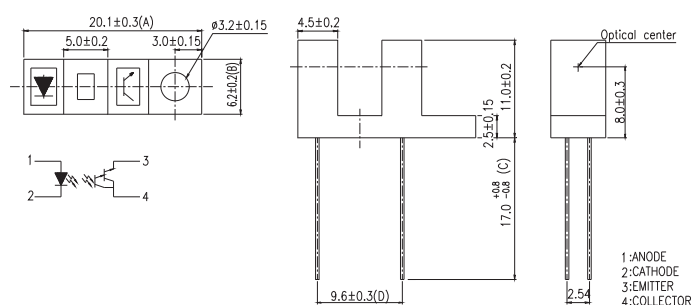


Product	Size (LXWXHmm)	V _{F_Typ} (V)	V _{F_Max} (V)	V _{CE(SAT)_Max} (V)	I _{C(ON)_Min} (mA)	I _{CEO_Max.} (nA)	Gap Distance (mm)
ITR9813	20.1x6.2x11.0	1.2	1.5	0.4	0.5	100	5

Optical Sensors | Transmissive Sensor

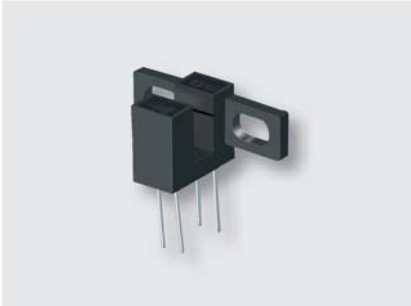


UNIT : mm

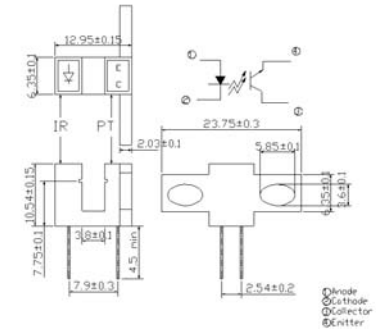


Product	Size (LXWXHmm)	V _{F_Typ} (V)	V _{F_Max} (V)	V _{CE(SAT)_Max} (V)	I _{C(ON)_Min} (mA)	I _{CEO_Max.} (nA)	Gap Distance (mm)
ITR20005-F	23.7x6.3x10.5	1.2	1.5	0.4	0.6	100	3.8




UNIT : mm

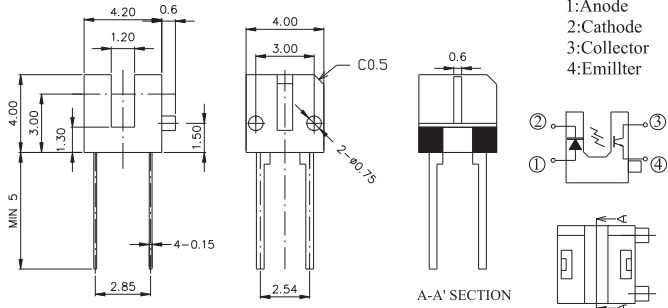

Product	Size (LXWXHmm)	V _{F_Typ} (V)	V _{F_Max} (V)	V _{CE(SAT)_Max} (V)	I _{C(ON)_Min} (mA)	I _{CEO_Max.} (nA)	Gap Distance (mm)
ITR20402	4.2x4.0x4.0	1.2	1.6	0.4	0.3	100	1.2

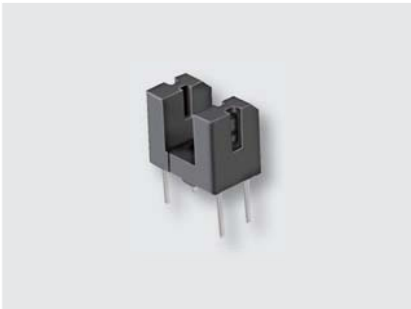

UNIT : mm

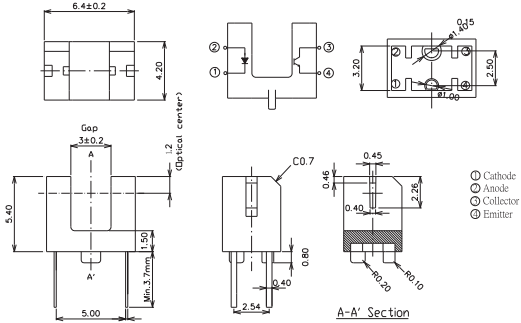


Product	Size (LXWXHmm)	V _{F_Typ} (V)	V _{F_Max} (V)	V _{CE(SAT)_Max} (V)	I _{C(ON)_Min} (mA)	I _{CEO_Max.} (nA)	Gap Distance (mm)
ITR20403	6.4x4.2x5.4	1.2	1.6	0.4	0.2	100	3

Photo Coupler I Darlington Transistor I 4Pin DIP-DC




UNIT : mm

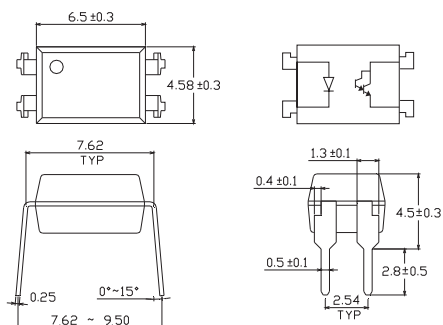

Product	Size (LXWXHmm)	V _{F_Typ} (V)	Rise / Fall Time (μs)	BV _{CEO_Min} (V)	CTR (%)	Viso (V _{rms})	V _{CE(SAT)_Max} (V)
EL815	6.5x4.58x3.5	1.2	60.0 / 53.0	35	600~7500	5000	1




UNIT : mm

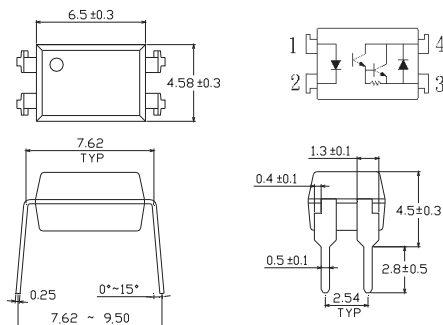


Product	Size (LXWXHmm)	V _{F_Typ} (V)	Rise / Fall Time (μs)	BV _{CEO_Min} (V)	CTR (%)	Viso (V _{rms})	V _{CE(SAT)_Max} (V)
EL852	6.5x4.58x3.5	1.2	300 / 100	350	1000~15000	5000	1.2

Photo Coupler I Darlington Transistor I 4Pin SOP-DC

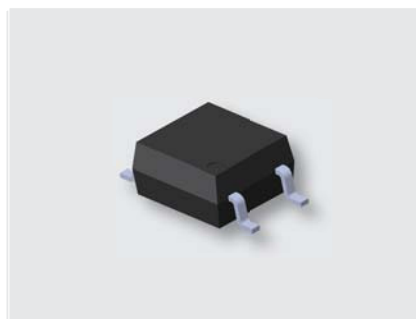

UNIT : mm

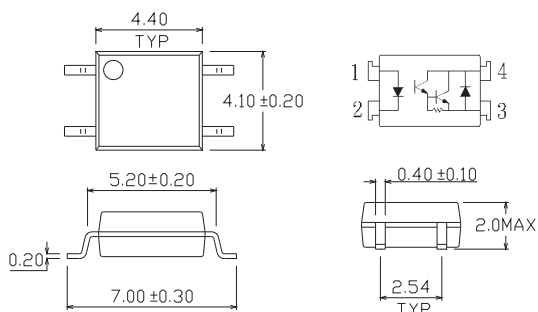


Product	Size (LXWXHmm)	V _{F_Typ} (V)	Rise / Fall Time (μs)	BV _{CEO_Min} (V)	CTR (%)	Viso (V _{rms})	V _{CE(SAT)_Max} (V)
EL452-G	4.4x4.1x2.0	1.2	300 / 100	350	1000~15000	3750	1.2

Photo Coupler ■ Darlington Transistor ■ 6Pin DIP-DC




UNIT : mm

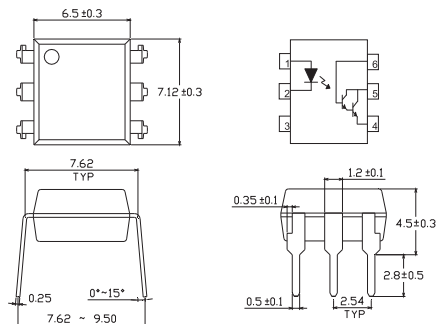


Product	Size (LXWXHmm)	V _{F_Typ} (V)	Rise / Fall Time (μs)	BV _{CEO_Min} (V)	CTR (%)	Viso (V _{rms})	V _{CE(SAT)_Max} (V)
4N29	7.12x6.5x3.5	1.2	5.0 / 40.0	55	100 min.	5000	1
4N30	7.12x6.5x3.5	1.2	5.0 / 40.0	55	100 min.	5000	1
4N31	7.12x6.5x3.5	1.2	5.0 / 40.0	55	50 min.	5000	1.2
4N32	7.12x6.5x3.5	1.2	5.0 / 100.0	55	500 min.	5000	1
4N33	7.12x6.5x3.5	1.2	5.0 / 100.0	55	500 min.	5000	1
H11B1	7.12x6.5x3.5	1.2	25 / 18	55	500 min.	5000	1
H11B2	7.12x6.5x3.5	1.2	25 / 18	55	200 min.	5000	1
H11B3	7.12x6.5x3.5	1.2	25 / 18	55	100 min.	5000	1
H11B255	7.12x6.5x3.5	1.2	25 / 18	55	100 min.	5000	1
TIL113	7.12x6.5x3.5	1.2	5 / 100	55	300 min.	5000	1.2

Photo Coupler ■ Darlington Transistor ■ 8Pin DIP-DC

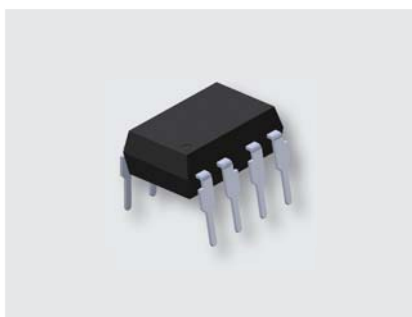


UNIT : mm

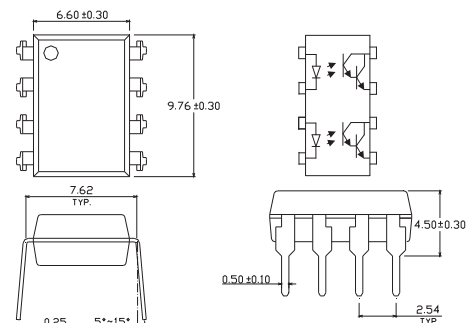


Product	Size (LXWXHmm)	V _{F_Typ} (V)	Rise / Fall Time (μs)	BV _{CEO_Min} (V)	CTR (%)	Viso (V _{rms})	V _{CE(SAT)_Max} (V)
EL825	9.76x6.6x3.5	1.2	60 / 53	40	600~7500	5000	1

Photo Coupler ■ High Speed ■ 5Pin SOP

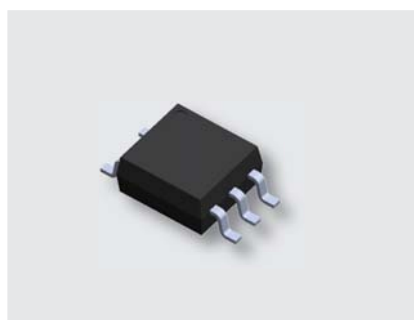


UNIT : mm

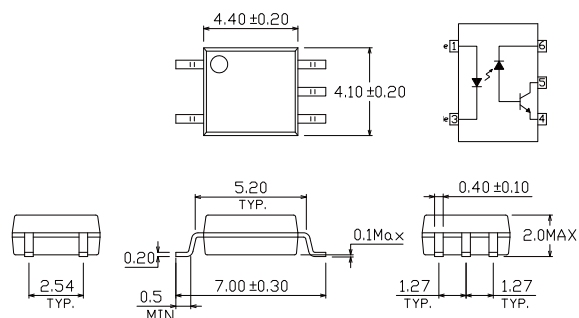

Product	Size (LXWXHmm)	tPHL / tPLH (ns)	Supply Voltage (V)	CTR (%)	Viso (V _{rms})	CMR (V/us)	I _O (mA)
ELM452	4.4×4.1×2.0	800/800	30 max.	20~50	3750	5000	8 max.
ELM453	4.4×4.1×2.0	800/800	30 max.	20~50	3750	15000	8 max.




UNIT : mm

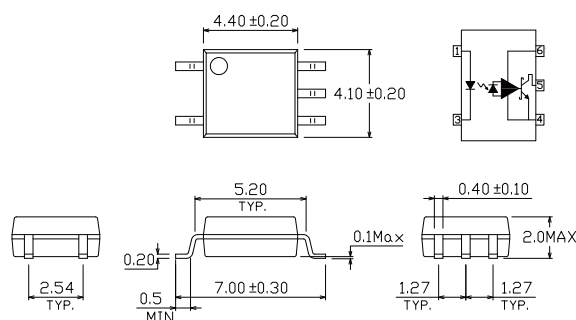


Product	Size (LXWXHmm)	tPHL / tPLH (ns)	Supply Voltage (V)	CTR (%)	Viso (V _{rms})	CMR (V/us)	I _O (mA)
ELM600	4.4×4.1×2.0	100/100	7 max.	-	3750	-	50 max.
ELM601	4.4×4.1×2.0	100/100	7 max.	-	3750	5000	50 max.
ELM611	4.4×4.1×2.0	100/100	7 max.	-	3750	20000	50 max.

Photo Coupler | High Speed | 8Pin SOP

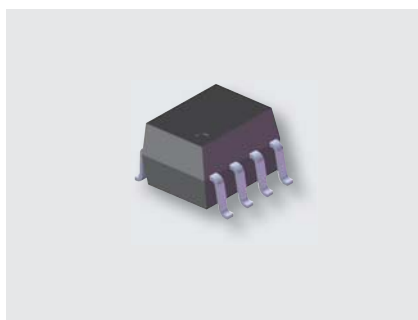


UNIT : mm

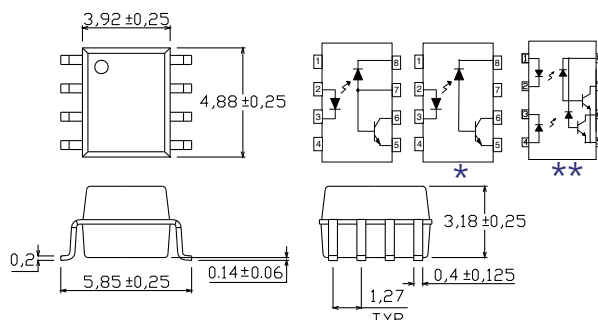


Product	Size (LXWXHmm)	tPHL / tPLH (ns)	Supply Voltage (V)	CTR (%)	Viso (V _{rms})	CMR (V/us)	I _O (mA)
*EL0452	4.88x3.92x3.18	1000 / 1000	30 max	19-50	3750	1000	8 max.
*EL0453	4.88x3.92x3.18	1000/1000	30 max.	19~50	3750	15000	8 max.
EL0500	4.88x3.92x3.18	2000 / 2000	30 max	7-50	3750	1000	8 max.
EL0501	4.88x3.92x3.18	1000 / 1000	30 max	19-50	3750	1000	8 max.
**EL0530	4.88x3.92x3.18	1000/1000	30 max.	7~50	3750	1000	8 max.
**EL0531	4.88x3.92x3.18	1000/1000	30 max.	19~50	3750	15000	8 max.

Star mark * : Please refer to the schematic of Pin configuration with " * " " * " mark

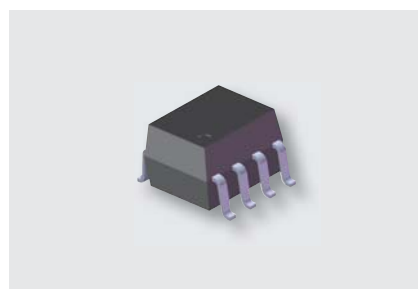


UNIT : mm

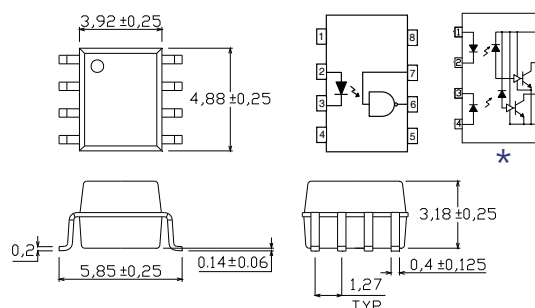


Product	Size (LXWXHmm)	tPHL / tPLH (ns)	Supply Voltage (V)	CTR (%)	Viso (V _{rms})	CMR (V/us)	I _O (mA)
EL0600	4.88x3.92x3.18	75 / 75	7 max	--	3750	--	50 max
EL0601	4.88x3.92x3.18	75 / 75	7 max	--	3750	5000	50 max
EL0611	4.88x3.92x3.18	75/75	7 max.	-	3750	10000	50 max.
*EL0630	4.88x3.92x3.18	75/75	7 max.	-	3750	-	50 max.
*EL0631	4.88x3.92x3.18	75/75	7 max.	-	3750	10000	50 max.

Star mark * : Please refer to the schematic of Pin configuration with " * " mark

Photo Coupler ■ High Speed ■ 8Pin DIP

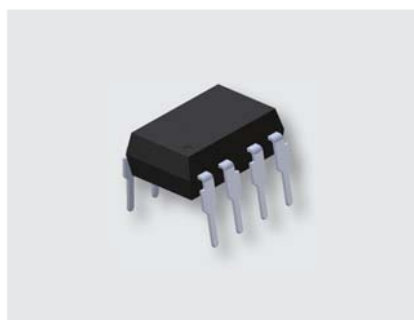


UNIT : mm

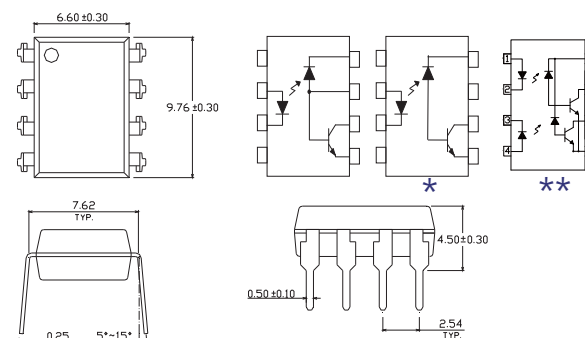


Product	Size (LXWXHmm)	tPHL / tPLH (ns)	Supply Voltage (V)	CTR (%)	Viso (V _{rms})	CMR (V/us)	I _O (mA)
6N135	9.76x6.60x3.50	2000 / 2000	30 max.	7~50	5000	1000	8 max.
6N136	9.76x6.60x3.50	1000 / 1000	30 max.	19~50	5000	1000	8 max.
**EL2530	9.76x6.60x3.50	1500/800	30 max.	7~50	5000	1000	8 max.
**EL2531	9.76x6.60x3.50	1500/800	30 max.	19~50	5000	15000	8 max.
*EL4502	9.76x6.60x3.50	1000 / 1000	30 max.	19~50	5000	1000	8 max.
*EL4503	9.76x6.60x3.50	1000/1000	30 max.	19~50	5000	15000	8 max.

Star mark * : Please refer to the schematic of Pin configuration with " * " " ** " mark

Photo Coupler ■ High Speed ■ 8Pin DIP

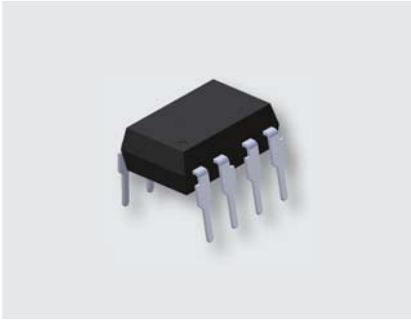


UNIT : mm

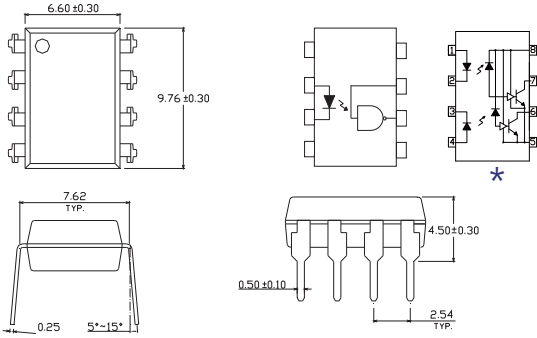


Product	Size (LXWXHmm)	tPHL / tPLH (ns)	Supply Voltage (V)	CTR (%)	Viso (V _{rms})	CMR (V/us)	I _O (mA)
6N137	9.76x6.60x3.50	75 / 75	7 max.	--	5000	1000	50 max.
EL2601	9.76x6.60x3.50	75/75	7 max.	-	5000	5000	50 max.
EL2611	9.76x6.60x3.50	75/75	7 max.	-	5000	10000	50 max.
*EL2630	9.76x6.60x3.50	75/75	7 max.	-	5000	5000	50 max.
*EL2631	9.76x6.60x3.50	75/75	7 max.	-	5000	10000	50 max.

Star mark * : Please refer to the schematic of Pin configuration with "★" mark

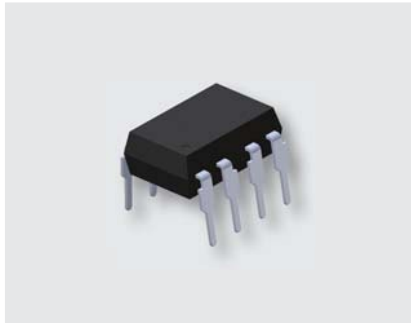

UNIT : mm

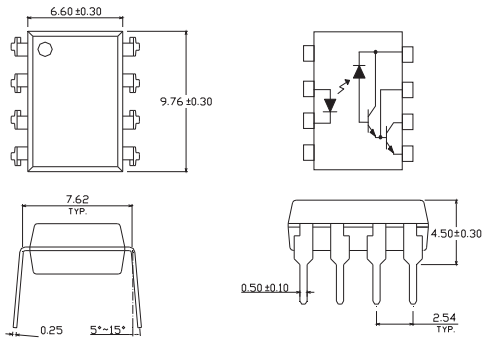


Product	Size (LXWXHmm)	tPHL / tPLH (ns)	Supply Voltage (V)	CTR (%)	Viso (V _{rms})	CMR (V/us)	I _O (mA)
6N138	9.76x6.60x3.50	15000 / 50000	7 max.	300 min.	5000	1000	60 max.
6N139	9.76x6.60x3.50	30000 / 90000	18 max.	500 min.	5000	1000	60 max.

Photo Coupler ■ High Speed ■ 8Pin Wide Body DIP



UNIT : mm

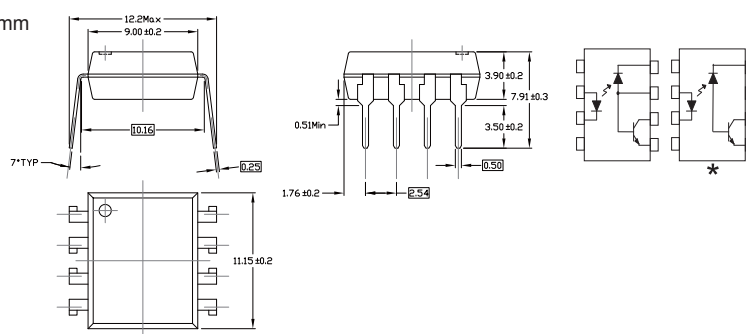


Product	Size (LXWXHmm)	tPHL / tPLH (ns)	Supply Voltage (V)	CTR (%)	Viso (V _{rms})	CMR (V/us)	I _O (mA)
ELW135	11.15×9.0×3.9	2000/2000	30 max.	7~50	5000	1000	8 max.
ELW136	11.15×9.0×3.9	1000/1000	30 max.	19~50	5000	1000	8 max.
*ELW4503	11.15×9.0×3.9	1000/1000	30 max.	19~50	5000	15000	8 max.

Star mark * : Please refer to the schematic of Pin configuration with " * " mark




UNIT : mm

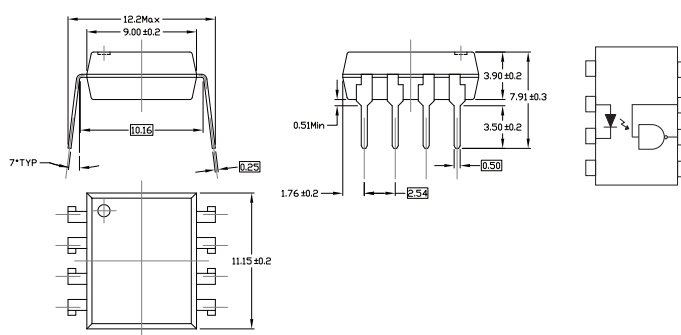


Product	Size (LXWXHmm)	tPHL / tPLH (ns)	Supply Voltage (V)	CTR (%)	Viso (V _{rms})	CMR (V/us)	I _O (mA)
ELW137	11.15×9.0×3.9	100/100	7 max.	-	5000	-	50 max.
ELW2601	11.15×9.0×3.9	100/100	7 max.	-	5000	5000	50 max.
ELW2611	11.15×9.0×3.9	100/100	7 max.	-	5000	10000	50 max.

Photo Coupler I IGBT/MOSFET Get Driver I 5Pin SOP

PRELIMINARY



UNIT : mm

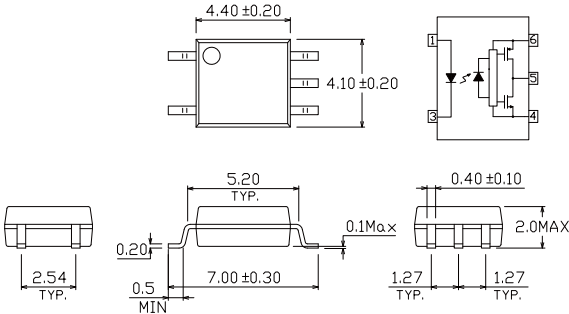


Product	Size (LXWXHmm)	tPHL / tPLH (ns)	Vcc (V)	Viso (V _{rms})	CMR (V/us)	I _O (A)
ELM314	4.4×4.1×2.0	300/300	35	3750	15000	0.6


• Product Availability : Please visit EVERLIGHT website for more updated information (www.everlight.com) or contact EVERLIGHT sales for regional options.

Photo Coupler I IGBT/MOSFET Get Driver I 8Pin SOP

PRELIMINARY



UNIT : mm

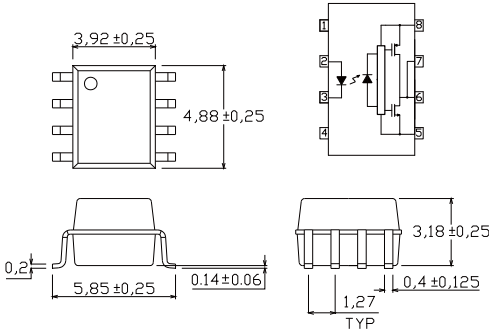


Product	Size (LXWXHmm)	tPHL / tPLH (ns)	Vcc (V)	Viso (V _{rms})	CMR (V/us)	I _O (A)
EL0314	4.88x3.92x3.18	300/300	35	3750	15000	0.6

• Product Availability : Please visit EVERLIGHT website for more updated information (www.everlight.com) or contact EVERLIGHT sales for regional options.

Photo Coupler ■ IGBT/MOSFET Get Driver ■ 8Pin DIP




UNIT : mm

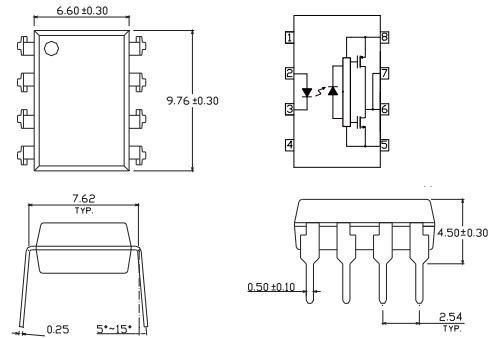


Product	Size (LXWXHmm)	tPHL / tPLH (ns)	Vcc (V)	Viso (V _{rms})	CMR (V/us)	I _O (A)
EL3120	9.76x6.60x3.50	300/300	35	5000	20000	2.5
EL3140	9.76x6.60x3.50	300/300	35	5000	15000	0.6

• Product Availability : Please visit EVERLIGHT website for more updated information (www.everlight.com) or contact EVERLIGHT sales for regional options.

Photo Coupler ■ IGBT/MOSFET Get Driver ■ 8Pin Wide Body DIP

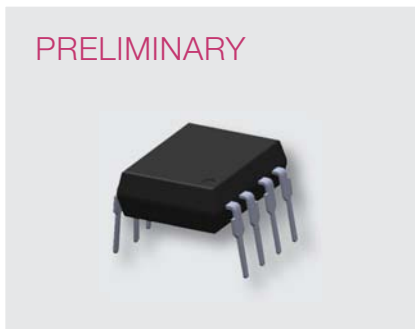


UNIT : mm

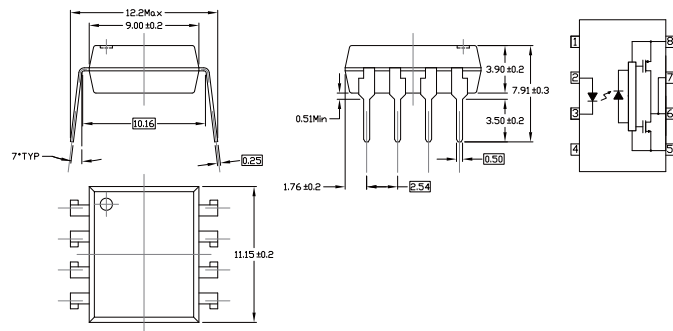


Product	Size (LXWXHmm)	tPHL / tPLH (ns)	Vcc (V)	Viso (V _{rms})	CMR (V/us)	I _O (A)
ELW3120	11.15x9.0x3.9	300/300	35	5000	20000	2.5

• Product Availability : Please visit EVERLIGHT website for more updated information (www.everlight.com) or contact EVERLIGHT sales for regional options.

Photo Coupler ■ Schmitt Trigger ■ 6Pin DIP

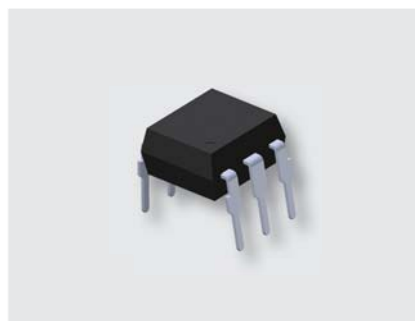

UNIT : mm

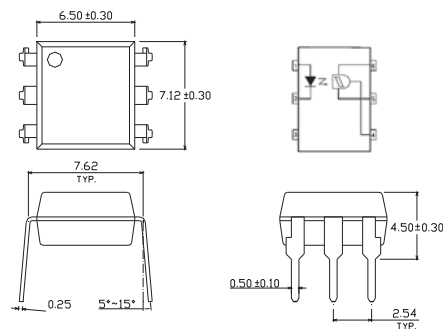


Product	Size (LXWXHmm)	Rise / Fall Time (μs)	Supply Voltage (V)	Viso (V _{rms})	I _{FT} (mA)	I _{CC_Max} (mA)	I _O (mA)
H11L1	7.12x6.5x3.5	0.1 / 0.1	3~15	5000	1.6	5	0.1

Photo Coupler ■ Transistor ■ 4Pin DIP-AC



UNIT : mm

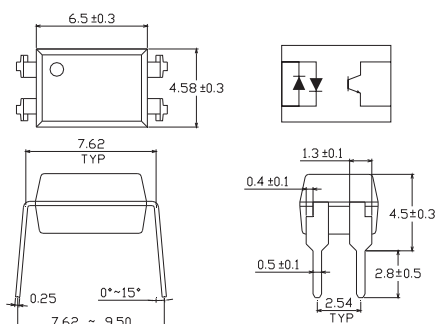


Product	Size (LXWXHmm)	V _{F_Typ} (V)	Rise / Fall Time (μs)	BV _{CEO} Min (V)	CTR (%)	Viso (V _{rms})	V _{CE(SAT)} Max (V)
EL814	6.5x4.58x3.5	1.2	7.0 / 11.0	80	20~300	5000	0.4

Photo Coupler ■ Transistor ■ 4Pin DIP-DC



UNIT : mm

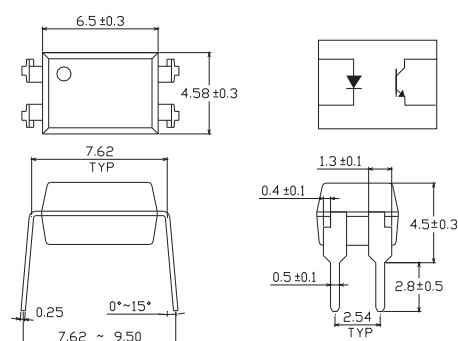


Product	Size (LXWXHmm)	V _{F_Typ} (V)	Rise / Fall Time (μs)	BV _{CEO} Min (V)	CTR (%)	Viso (V _{rms})	V _{CE(SAT)} Max (V)
EL816	6.5x4.58x3.5	1.2	4.0 / 3.0	80	50~600	5000	0.4
EL817	6.5x4.58x3.5	1.2	3.0 / 4.0	35	50~600	5000	0.4
EL817-G	6.5x4.58x3.5	1.2	3.0 / 4.0	80	50~600	5000	0.4
EL851	6.5x4.58x3.5	1.2	4/5	350	50~600	5000	0.4

Photo Coupler ■ Transistor ■ 4Pin High Isolation




UNIT : mm

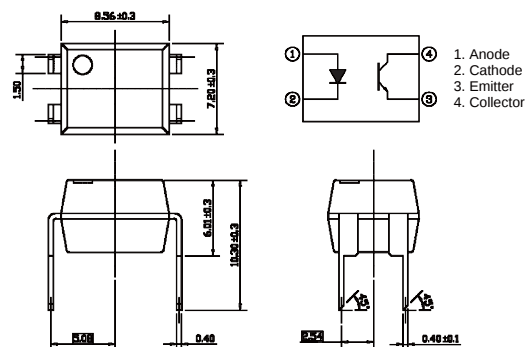

Product	Size (LXWXHmm)	V _{F_Typ} (V)	Rise / Fall Time (μs)	BV _{CEO} Min (V)	CTR (%)	Viso (V _{rms})	V _{CE(SAT)} Max (V)
CNY64	8.56x7.20x6.01	1.6	3.0 / 5.0	80	50~300	8200	0.3




UNIT : mm

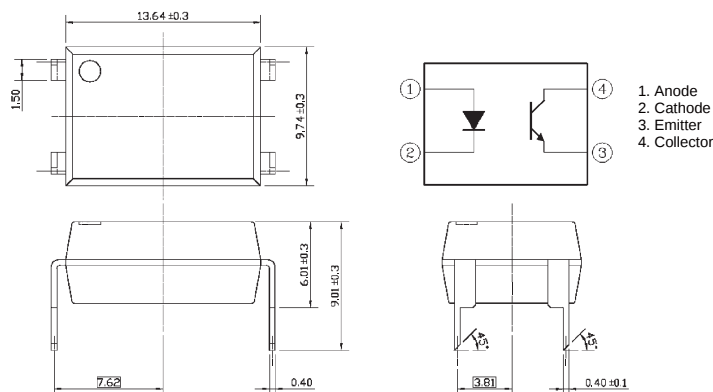


Product	Size (LXWXHmm)	V _{F_Typ} (V)	Rise / Fall Time (μs)	BV _{CEO} Min (V)	CTR (%)	Viso (V _{rms})	V _{CE(SAT)} Max (V)
CNY65	13.64x9.74x6.01	1.6	3.0 / 5.0	80	50~300	8200	0.3

Photo Coupler ■ Transistor ■ 4Pin SOP-AC

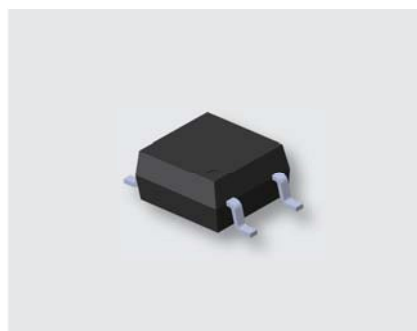

UNIT : mm

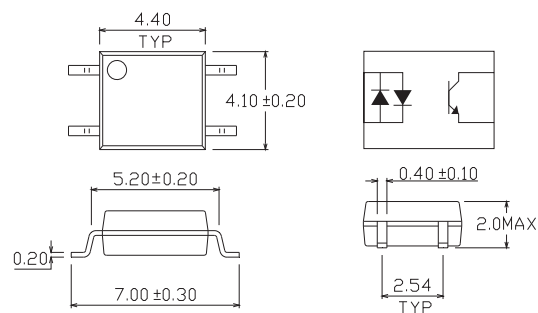


Product	Size (LXWXHmm)	V _{F_Typ} (V)	Rise / Fall Time (μs)	BV _{CEO} Min (V)	CTR (%)	Viso (V _{rms})	V _{CE(SAT)} Max (V)
EL354N-G	4.4x4.1x2.0	1.2	6.0/8.0	80	20~300	3750	0.4

Photo Coupler | Transistor | 4Pin SOP-DC




UNIT : mm

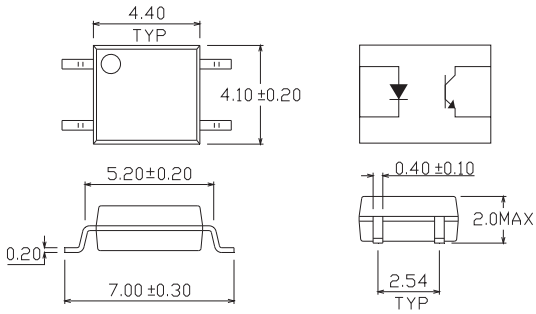


Product	Size (LXWXHmm)	V _{F_Typ} (V)	Rise / Fall Time (μs)	BV _{CEO_Min} (V)	CTR (%)	Viso (V _{rms})	V _{CE(SAT)_Max} (V)
EL357N-G	4.4x4.1x2.0	1.2	3.0/4.0	80	50~600	3750	0.4

Photo Coupler | Transistor | 4Pin SSOP-AC

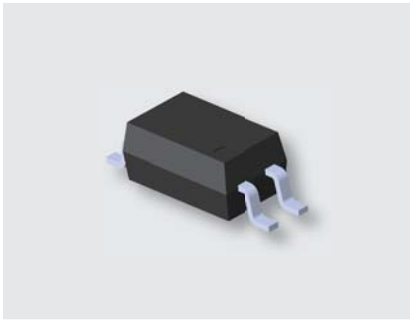


UNIT : mm

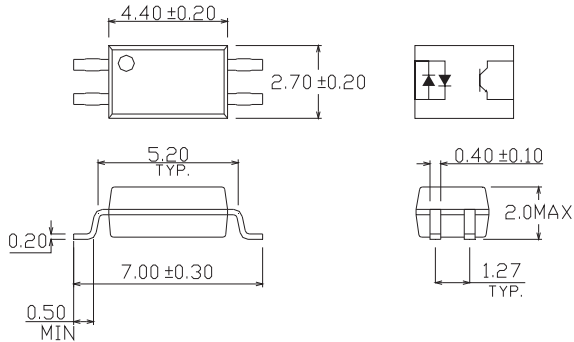


Product	Size (LXWXHmm)	V _{F_Typ} (V)	Rise / Fall Time (μs)	BV _{CEO_Min} (V)	CTR (%)	Viso (V _{rms})	V _{CE(SAT)_Max} (V)
EL3H4-G	4.4x2.7x2.0	1.2	6/8	80	20~300	3750	0.4

Photo Coupler | Transistor | 4Pin SSOP-DC

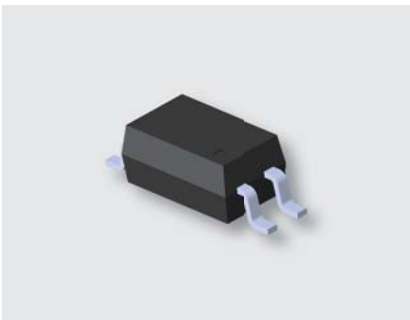


UNIT : mm

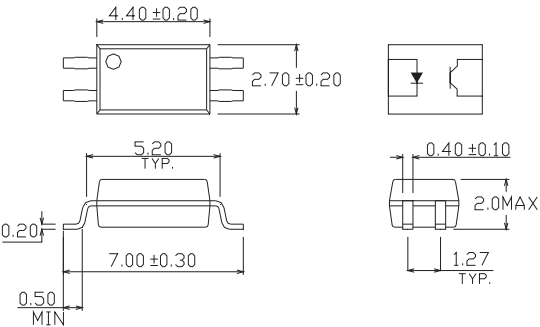


Product	Size (LXWXHmm)	V _{F_Typ} (V)	Rise / Fall Time (μs)	BV _{CEO_Min} (V)	CTR (%)	Viso (V _{rms})	V _{CE(SAT)_Max} (V)
EL3H7-G	4.4x2.7x2.0	1.2	5.0/3.0	80	50~600	3750	0.4

Photo Coupler | Transistor | 4Pin Long Creepage

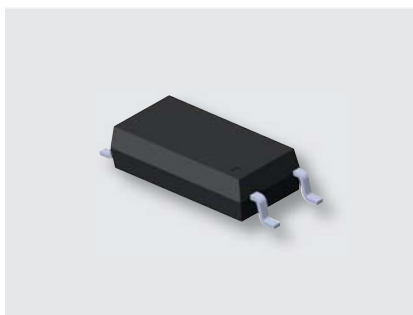


UNIT : mm

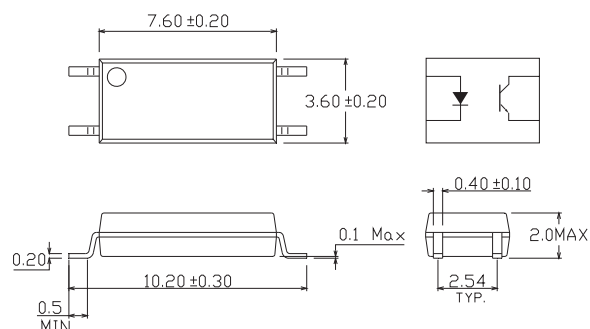


Product	Size (LXWXHmm)	V _{F_Typ} (V)	Rise / Fall Time (μs)	BV _{CEO_Min} (V)	CTR (%)	Viso (V _{rms})	V _{CE(SAT)_Max} (V)
EL1010-G	7.6x3.6x2.0	1.45	2 / 3	80	50~600	5000	0.3
EL1012-G	7.6x3.6x2.0	1.45	2 / 3	80	63~125	5000	0.3
EL1013-G	7.6x3.6x2.0	1.45	2 / 3	80	100~200	5000	0.3
EL1014-G	7.6x3.6x2.0	1.45	2 / 3	80	160~320	5000	0.3
EL1017-G	7.6x3.6x2.0	1.45	2 / 3	80	80~160	5000	0.3
EL1018-G	7.6x3.6x2.0	1.45	2 / 3	80	130~260	5000	0.3
EL1019-G	7.6x3.6x2.0	1.45	2 / 3	80	200~400	5000	0.3

Photo Coupler | Transistor | 5Pin Long Creepage

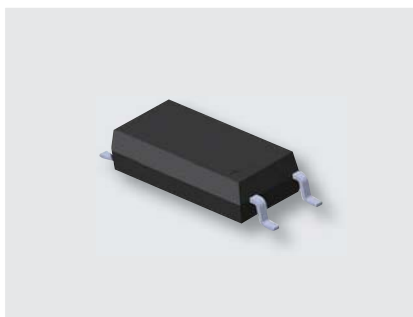


UNIT : mm

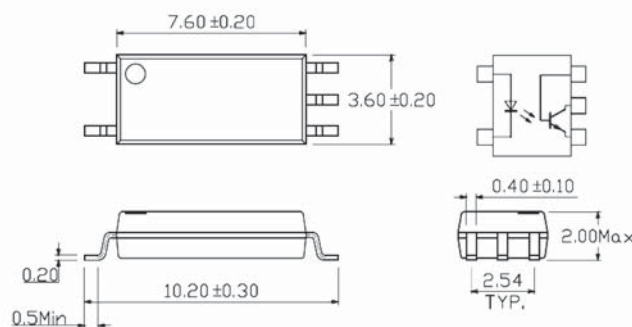


Product	Size (LXWXHmm)	V _{F_Typ} (V)	Rise / Fall Time (μs)	BV _{CEO_Min} (V)	CTR (%)	Viso (V _{rms})	V _{CE(SAT)_Max} (V)
EL1110-G	7.6x3.6x2.0	1.45	2 / 3	80	50~600	5000	0.3
EL1112-G	7.6x3.6x2.0	1.45	2 / 3	80	63~125	5000	0.3
EL1113-G	7.6x3.6x2.0	1.45	2 / 3	80	100~200	5000	0.3
EL1114-G	7.6x3.6x2.0	1.45	2 / 3	80	160~320	5000	0.3
EL1116-G	7.6x3.6x2.0	1.45	2 / 3	80	100~300	5000	0.3
EL1117-G	7.6x3.6x2.0	1.45	2 / 3	80	80~160	5000	0.3
EL1118-G	7.6x3.6x2.0	1.45	2 / 3	80	130~260	5000	0.3
EL1119-G	7.6x3.6x2.0	1.45	2 / 3	80	200~400	5000	0.3

Photo Coupler | Transistor | 6Pin DIP-DC

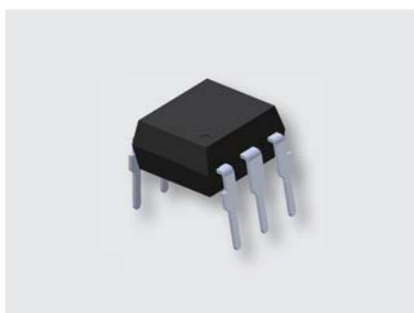


UNIT : mm

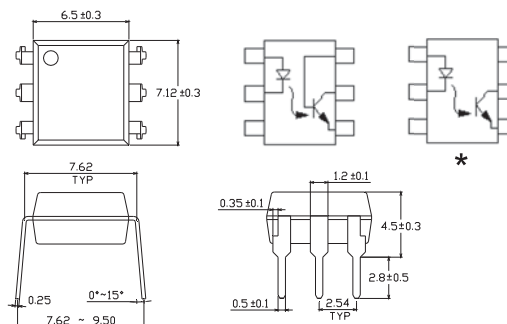


Product	Size (LXWXHmm)	V _{F_Typ} (V)	Rise / Fall Time (μs)	BV _{CEO} Min (V)	CTR (%)	Viso (V _{rms})	V _{CE(SAT)} Max (V)
4N25	7.12x6.5x3.5	1.2	3.0/3.0	80	20 min.	5000	0.4
4N26	7.12x6.5x3.5	1.2	3.0/3.0	80	20 min.	5000	0.4
4N27	7.12x6.5x3.5	1.2	3.0/3.0	80	10 min.	5000	0.4
4N28	7.12x6.5x3.5	1.2	3.0/3.0	80	10 min.	5000	0.4
4N35	7.12x6.5x3.5	1.2	10.0/9.0	80	100 min.	5000	0.4
4N36	7.12x6.5x3.5	1.2	10.0/9.0	80	100 min.	5000	0.4
4N37	7.12x6.5x3.5	1.2	10.0/9.0	80	100 min.	5000	0.4
4N38	7.12x6.5x3.5	1.2	10.0/9.0	80	20 min.	5000	0.4
CNY17-1	7.12x6.5x3.5	--	6.0/8.0	80	40~80	5000	0.4
CNY17-2	7.12x6.5x3.5	--	6.0/8.0	80	63~125	5000	0.4
CNY17-3	7.12x6.5x3.5	--	6.0/8.0	80	100~200	5000	0.4
CNY17-4	7.12x6.5x3.5	--	6.0/8.0	80	160~320	5000	0.4
*CNY17F-1	7.12x6.5x3.5	--	6.0/8.0	80	40~80	5000	0.4
*CNY17F-2	7.12x6.5x3.5	--	6.0/8.0	80	63~125	5000	0.4
*CNY17F-3	7.12x6.5x3.5	--	6.0/8.0	80	100~200	5000	0.4
*CNY17F-4	7.12x6.5x3.5	--	6.0/8.0	80	160~320	5000	0.4
H11A1	7.12x6.5x3.5	1.2	3.0/3.0	80	50 min.	5000	0.4
H11A2	7.12x6.5x3.5	1.2	3.0/3.0	80	20 min.	5000	0.4
H11A3	7.12x6.5x3.5	1.2	3.0/3.0	80	20 min.	5000	0.4
H11A4	7.12x6.5x3.5	1.2	3.0/3.0	80	10 min.	5000	0.4
H11A5	7.12x6.5x3.5	1.2	3.0/3.0	80	30 min.	5000	0.4
MCT2E	7.12x6.5x3.5	1.23	3.0/3.0	80	20 min.	5000	0.4
TIL111	7.12x6.5x3.5	1.22	6.0/8.0	80	--	5000	0.4
TIL117	7.12x6.5x3.5	1.2	6.0/8.0	80	50 min.	5000	0.4

Star mark * : Please refer to the schematic of Pin configuration with " * " mark

Photo Coupler | Transistor | 6Pin DIP-AC

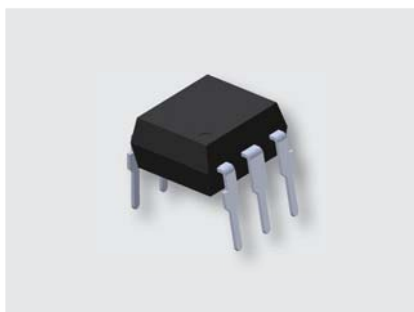


UNIT : mm

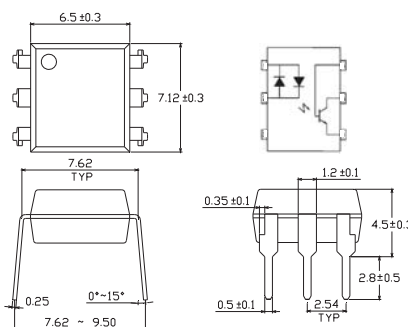


Product	Size (LXWXHmm)	V _{F_Typ} (V)	Rise / Fall Time (μs)	BV _{CEO} Min (V)	CTR (%)	Viso (V _{rms})	V _{CE(SAT)} Max (V)
H11AA1	7.12x6.5x3.5	1.2	10.0 / 10.0	80	20 min.	5000	0.4
H11AA2	7.12x6.5x3.5	1.2	10.0 / 10.0	80	10 min.	5000	0.4
H11AA3	7.12x6.5x3.5	1.2	10.0 / 10.0	80	50 min.	5000	0.4
H11AA4	7.12x6.5x3.5	1.2	10.0 / 10.0	80	100 min.	5000	0.4

Photo Coupler I Transistor I 8Pin DIP-DC

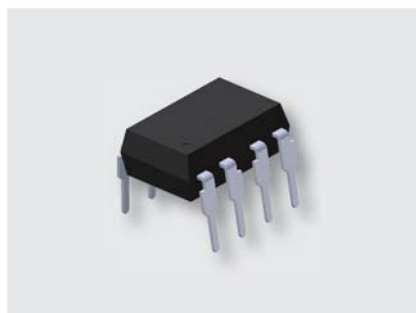


UNIT : mm

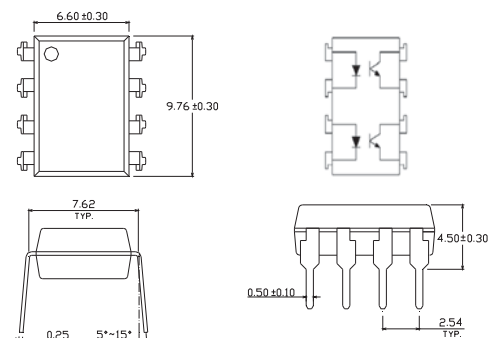


Product	Size (LXWXHmm)	V _{F_Typ} (V)	Rise / Fall Time (μs)	BV _{CEO} Min (V)	CTR (%)	Viso (V _{rms})	V _{CE(SAT)} Max (V)
EL827	9.76x6.5x3.5	1.2	3.0 / 4.0	80	50~600	5000	0.4


Photo Coupler I Transistor I 8Pin SOP-DC

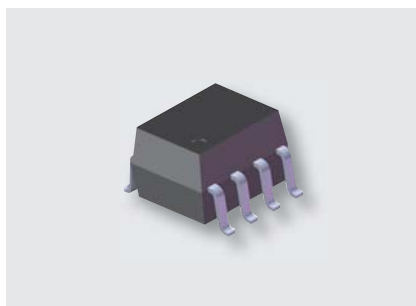


UNIT : mm

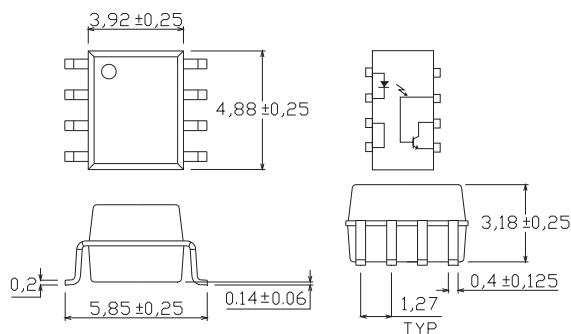

Product	Size (LXWXHmm)	V _{F_Typ} (V)	Rise / Fall Time (μs)	BV _{CEO} Min (V)	CTR (%)	Viso (V _{rms})	V _{CE(SAT)} Max (V)
EL205	4.88x3.92x3.18	1.2	1.6 / 2.2	80	40~80	3750	0.4
EL206	4.88x3.92x3.18	1.2	1.6 / 2.2	80	63~125	3750	0.4
EL207	4.88x3.92x3.18	1.2	1.6 / 2.2	80	100~200	3750	0.4
EL208	4.88x3.92x3.18	1.2	1.6 / 2.2	80	160~320	3750	0.4
EL211	4.88x3.92x3.18	1.2	1.6 / 2.2	80	20 min.	3750	0.4
EL212	4.88x3.92x3.18	1.2	1.6 / 2.2	80	50 min.	3750	0.4
EL213	4.88x3.92x3.18	1.2	1.6 / 2.2	80	100 min.	3750	0.4
EL215	4.88x3.92x3.18	1.2	1.6 / 2.2	80	10 min.	3750	0.4
EL216	4.88x3.92x3.18	1.2	1.6 / 2.2	80	50 min.	3750	0.4
EL217	4.88x3.92x3.18	1.2	1.6 / 2.2	80	100 min.	3750	0.4

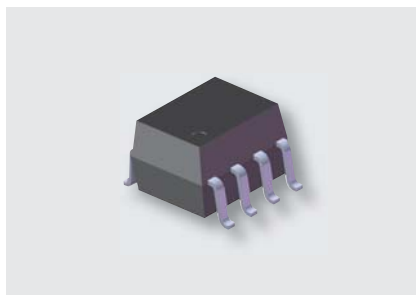

UNIT : mm

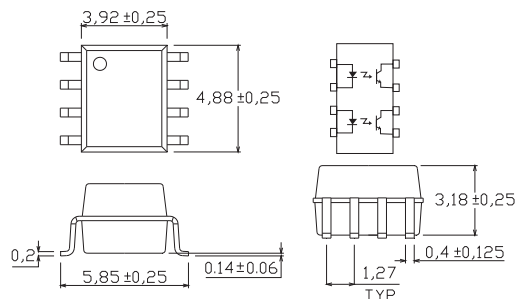


Product	Size (LXWXHmm)	V _{F_Typ} (V)	Rise / Fall Time (μs)	BV _{CEO} Min (V)	CTR (%)	Viso (V _{rms})	V _{CE(SAT)} Max (V)
ELD205	4.88x3.92x3.18	1.2	1.6 / 2.2	80	40~80	3750	0.4
ELD206	4.88x3.92x3.18	1.2	1.6 / 2.2	80	63~125	3750	0.4
ELD207	4.88x3.92x3.18	1.2	1.6 / 2.2	80	100~200	3750	0.4
ELD211	4.88x3.92x3.18	1.2	1.6 / 2.2	80	20 min.	3750	0.4
ELD213	4.88x3.92x3.18	1.2	1.6 / 2.2	80	100 min.	3750	0.4
ELD217	4.88x3.92x3.18	1.2	1.6 / 2.2	80	100 min.	3750	0.4

Photo Coupler | Transistor | 8Pin SSOP-DC

PRELIMINARY



UNIT : mm

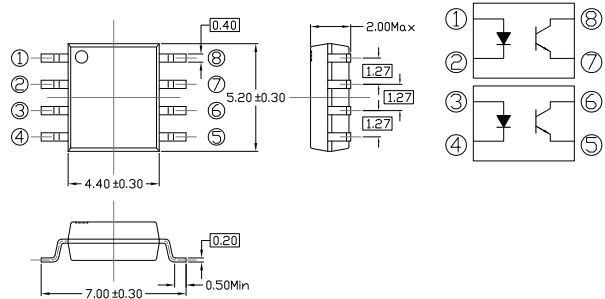


Product	Size (LXWXHmm)	V _{F_Typ} (V)	Rise / Fall Time (μs)	BV _{CEO_Min} (V)	CTR (%)	Viso (V _{rms})	V _{CE(SAT)_Max} (V)
ELD3H7-G	5.2×4.4×2.0	1.2	5/3	80	50~600	3750	0.4


• Product Availability : Please visit EVERLIGHT website for more updated information (www.everlight.com) or contact EVERLIGHT sales for regional options.

Photo Coupler | Transistor | 16Pin SSOP-DC

PRELIMINARY



UNIT : mm

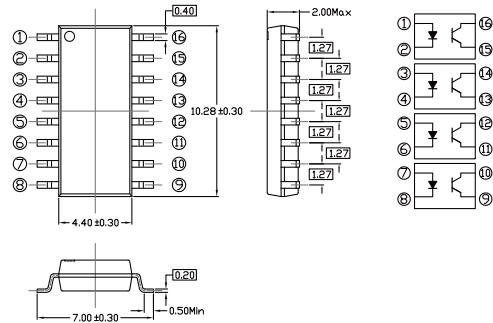


Product	Size (LXWXHmm)	V _{F_Typ} (V)	Rise / Fall Time (μs)	BV _{CEO_Min} (V)	CTR (%)	Viso (V _{rms})	V _{CE(SAT)_Max} (V)
ELQ3H7-G	10.28×4.4×2.0	1.2	5/3	80	50~600	3750	0.4

• Product Availability : Please visit EVERLIGHT website for more updated information (www.everlight.com) or contact EVERLIGHT sales for regional options.

Photo Coupler | Triac | 4Pin SOP




UNIT : mm

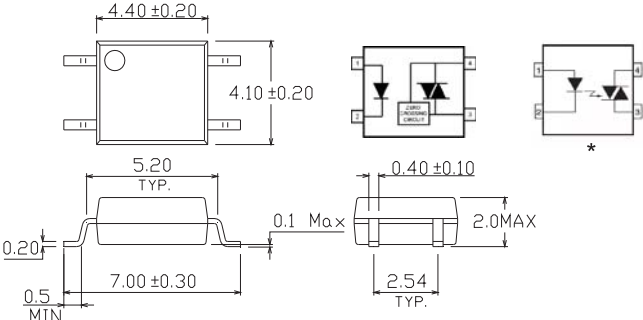


Product	Size (LXWXHmm)	V_{TM} (V)	V_{INH} (V)	V_{DRM} (V)	V_{F_Typ} (V)	V_{iso} (V_{rms})	I_{FT} (mA)
ELM3042	4.40x4.10x2.0	3	20	400	1.5	3750	10
ELM3043	4.40x4.10x2.0	3	20	400	1.5	3750	5
ELM3044	4.40x4.10x2.0	3	20	400	1.5	3750	3
ELM3062	4.40x4.10x2.0	3	20	600	1.5	3750	10
ELM3063	4.40x4.10x2.0	3	20	600	1.5	3750	5
ELM3064	4.40x4.10x2.0	3	20	600	1.5	3750	3
ELM3082	4.40x4.10x2.0	3	20	800	1.5	3750	10
ELM3083	4.40x4.10x2.0	3	20	800	1.5	3750	5
ELM3084	4.40x4.10x2.0	3	20	800	1.5	3750	3
*ELM3022	4.40x4.10x2.0	2.5	--	400	1.2	3750	10
*ELM3023	4.40x4.10x2.0	2.5	--	400	1.2	3750	5
*ELM3024	4.40x4.10x2.0	2.5	--	400	1.2	3750	3
*ELM3052	4.40x4.10x2.0	2.5	--	600	1.2	3750	10
*ELM3053	4.40x4.10x2.0	2.5	--	600	1.2	3750	5
*ELM3054	4.40x4.10x2.0	2.5	--	600	1.2	3750	3

Star mark * : Please refer to the schematic of Pin configuration with " ★ " mark

Photo Coupler I Triac I 4Pin DIP

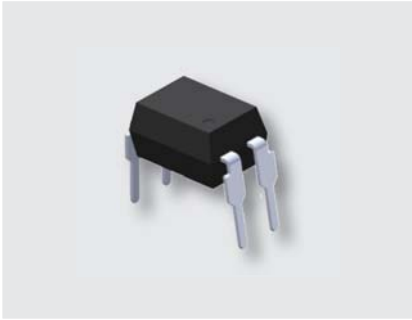


UNIT : mm

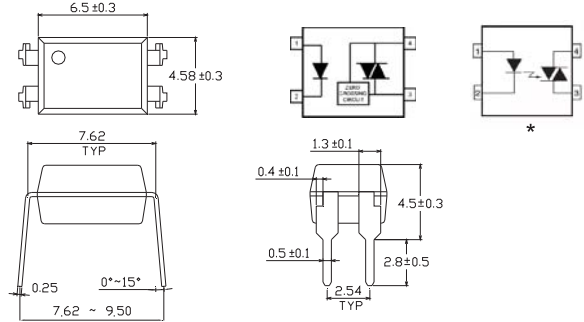


Product	Size (LXWXHmm)	V_{TM} (V)	V_{INH} (V)	V_{DRM} (V)	V_{F_Typ} (V)	Viso (V_{rms})	I_{FT} (mA)
ELT3041	6.5×4.58×3.5	3	20	400	1.5	5000	15
ELT3042	6.5×4.58×3.5	3	20	400	1.5	5000	10
ELT3043	6.5×4.58×3.5	3	20	400	1.5	5000	5
ELT3061	6.5×4.58×3.5	3	20	600	1.5	5000	15
ELT3062	6.5×4.58×3.5	3	20	600	1.5	5000	10
ELT3063	6.5×4.58×3.5	3	20	600	1.5	5000	5
ELT3081	6.5×4.58×3.5	3	20	800	1.5	5000	15
ELT3082	6.5×4.58×3.5	3	20	800	1.5	5000	10
ELT3083	6.5×4.58×3.5	3	20	800	1.5	5000	5
*ELT3021	6.5×4.58×3.5	2.5	-	400	1.2	5000	15
*ELT3022	6.5×4.58×3.5	2.5	-	400	1.2	5000	10
*ELT3023	6.5×4.58×3.5	2.5	-	400	1.2	5000	5
*ELT3051	6.5×4.58×3.5	2.5	-	600	1.2	5000	15
*ELT3052	6.5×4.58×3.5	2.5	-	600	1.2	5000	10
*ELT3053	6.5×4.58×3.5	2.5	-	600	1.2	5000	5

Star mark * : Please refer to the schematic of Pin configuration with " * " mark

Photo Coupler I Triac I 6Pin DIP

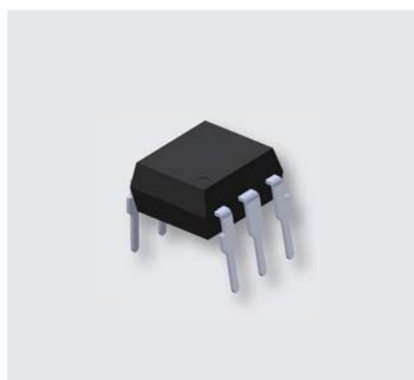

UNIT : mm

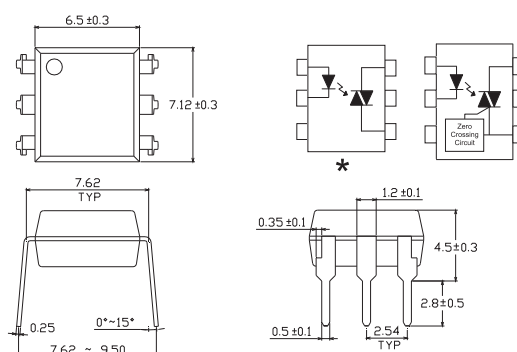


Product	Size (LXWXHmm)	V_{TM} (V)	V_{INH} (V)	V_{DRM} (V)	V_{F_Typ} (V)	Viso (V_{rms})	I_{FT} (mA)
EL3031	7.12x6.5x3.5	3	20	250	--	5000	15
EL3032	7.12x6.5x3.5	3	20	250	--	5000	10
EL3033	7.12x6.5x3.5	3	20	250	--	5000	5
EL3041	7.12x6.5x3.5	3	20	400	--	5000	15
EL3042	7.12x6.5x3.5	3	20	400	--	5000	10
EL3043	7.12x6.5x3.5	3	20	400	--	5000	5
EL3061	7.12x6.5x3.5	3	20	600	--	5000	15
EL3062	7.12x6.5x3.5	3	20	600	--	5000	10
EL3063	7.12x6.5x3.5	3	20	600	--	5000	5
EL3081	7.12x6.5x3.5	3	20	800	--	5000	15
EL3082	7.12x6.5x3.5	3	20	800	--	5000	10
EL3083	7.12x6.5x3.5	3	20	800	--	5000	5
*EL3010	7.12x6.5x3.5	2.5	--	250	1.18	5000	15
*EL3011	7.12x6.5x3.5	2.5	--	250	1.18	5000	10
*EL3012	7.12x6.5x3.5	2.5	--	250	1.18	5000	5
*EL3021	7.12x6.5x3.5	2.5	--	400	1.18	5000	15
*EL3022	7.12x6.5x3.5	2.5	--	400	1.18	5000	10
*EL3023	7.12x6.5x3.5	2.5	--	400	1.18	5000	5
*EL3051	7.12x6.5x3.5	2.5	--	600	1.18	5000	15
*EL3052	7.12x6.5x3.5	2.5	--	600	1.18	5000	10
*EL3053	7.12x6.5x3.5	2.5	--	600	1.18	5000	5

Star mark * : Please refer to the schematic of Pin configuration with " * " mark

Discrete I Shunt Regulator




UNIT : mm

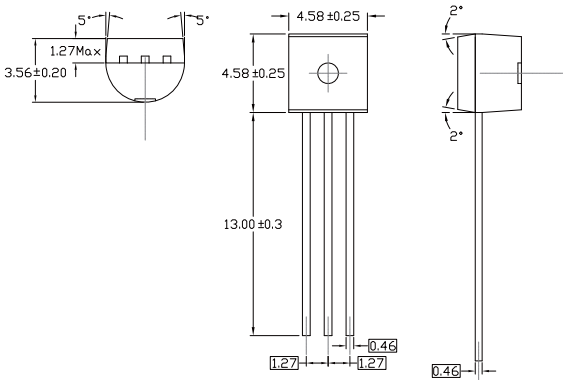

Product	Size (LXWXHmm)	VKA (V)	Cathode Current Range IK max. (mA)	V _{REF} (V)	Voltage Tolerance (%)	Minimum Cathode Current for Regulation IK (MIN)(mA)
EL431AA	4.58×4.58×3.56	VREF to 36	150	2.495	2	1.0
EL431BA	4.58×4.58×3.56	VREF to 36	150	2.495	1	1.0
EL431CA	4.58×4.58×3.56	VREF to 36	150	2.495	0.5	1.0
EL431DA	4.58×4.58×3.56	VREF to 36	150	2.495	0.4	1.0



UNIT : mm

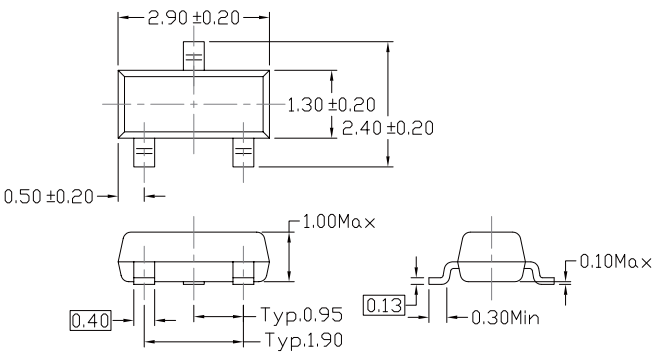

Product	Size (LXWXHmm)	VKA (V)	Cathode Current Range IK max. (mA)	V _{REF} (V)	Voltage Tolerance (%)	Minimum Cathode Current for Regulation IK (MIN)(mA)
EL431AN	2.9×1.3×1.0	VREF to 36	150	2.495	2	1.0
EL431BN	2.9×1.3×1.0	VREF to 36	150	2.495	1	1.0
EL431CN	2.9×1.3×1.0	VREF to 36	150	2.495	0.5	1.0
EL431DN	2.9×1.3×1.0	VREF to 36	150	2.495	0.4	1.0

Notice

The content of this Catalogue is provided for informational purposes only. EVERLIGHT makes no representations about the accuracy, reliability, completeness of the information in this catalogue. EVERLIGHT may, at its sole discretion, revise the specifications, appearance, structures and materials herein without notice for the purpose of improvement. Please contact EVERLIGHT sales should you require more information on a product or its application.

This Catalogue does not contain any guarantee or agreed quality of EVERLIGHT's products or any warranty of merchantability, intellectual property, and fitness for a particular purpose. EVERLIGHT's obligation and responsibilities regarding its products are governed solely by the agreements under which they are sold. Unless otherwise agreed in writing, the information contained herein does not become part of the agreements.

The trademarks and logos ("Trademarks") displayed in this Catalogue are the property of EVERLIGHT and/or its affiliates. Nothing in this Catalogue should be construed as granting any licenses or right to the Trademarks. Without the express written consent of EVERLIGHT, the use of the Trademarks is prohibited.

All text, images, graphics and other materials contained in this Catalogue are subject to the copyright and other intellectual property rights of EVERLIGHT and/or its affiliates.

ASIA

CHINA

HONG KONG

EVILITE ELECTRONICS CO., LTD.

Units 1606-1608, 16/F., Prosperity Place,
6 Shing Yip Street, Kwun Tong, Kowloon,
Hong Kong

TEL: +852-23880602

FAX: +852-23881127, 23843092

EMAIL: hkcm@everlight.com

GUANGZHOU

EVERLIGHT ELECTRONICS (BVI) CO., LTD.

205 2F, Business Building Shatou,
East Yushan Rd., Panyu Town, Guangzhou,
PRC, China

Postcode: 511490

TEL: +86-(0)20-84663392

FAX: +86-(0)20-84663372

EMAIL: chcm@everlight.com

SUZHOU

EVERLIGHT ELECTRONICS (CHINA) CO., LTD.

Room 306-308, Block 1, Runjie Square, No. 9,
Road Dengwei, Suzhou (SND), Jiang Su, China
Postcode: 215011

TEL: +86-(0)512-68020883

EMAIL: chsha@everlight.com

TIANJIN

EVERLIGHT ELECTRONICS (BVI) CO., LTD.

Room. 2208, Vanke Center Building, No. 290,
Zhongshan Rd., Hebei District, Tianjin, China
Postcode: 300141

TEL: +86-22-26351122, 26351133

EMAIL: chsha@everlight.com

HEADQUARTERS

EVERLIGHT ELECTRONICS CO., LTD.

No. 6-8, Zhonghua Rd., Shulin Dist., New Taipei City, Taiwan 23860

TEL: +886-2-2685-6688 FAX: +886-2685-6699

www.everlight.com

KOREA

EVERLIGHT OPTOELECTRONICS

KOREA CO., LTD.

#1308, 13F, SKnTechnopark Mega-center dong,
190-1 Sangdaewon-dong, Seongnam-si,
Gyeonggi-do, Korea

TEL: +82-31-776-2690

FAX: +82-31-776-2696

EMAIL: tommylee@everlight.com

MALAYSIA

EVERLIGHT OPTOELECTRONICS

(M) SDN BHD

B-04-20 Krystal Point,
303 Jalan Sultan Azlan Shah,
11900 Penang, Malaysia

TEL: +60-4-646-4233

FAX: +60-4-646-5233

EMAIL: inquiry@everlight-pg.com.my

JAPAN

E&E JAPAN CO., LTD.

Kindaikagakysya 7F, 2-7-15, Ichigayatamachi,
Shinjuku-ku, Tokyo, 162-0843, Japan

TEL: +81-(0)3-3267-6761

FAX: +81-(0)3-5225-6771

EMAIL: eejp@eejp.co.jp

www.eejp.co.jp

INDIA

EVERLIGHT ELECTRONICS CO., LTD.

MOBILE: +91-9901111880

EMAIL: gliriprasad@everlight.com

AMERICA

TEXAS USA

EVERLIGHT AMERICAS INC.

3220 Commander Dr. Suite 100 Carrollton,
Texas, 75006, United States

TEL: +1-972-490-4008

FAX: +1-972-490-5009

EMAIL: salesmarketing@everlightamericas.com

CALIFORNIA USA

EVERLIGHT AMERICAS INC.

327 Piercy Road, San Jose, CA 95138, USA

TEL: +1-408-225-7800

FAX: +1-408-225-7800

EMAIL: salesmarketing@everlightamericas.com

CANADA

EVERLIGHT CANADA

P.O. Box 86056, 1011 Upper Middle Road, Oakville,
Ontario, Canada L6H 5V6

TEL: +1-905-315-5050

FAX: +1-905-336-0040

EMAIL: everlightcanada@everlight.com

EUROPE

GERMANY, HQ

EVERLIGHT ELECTRONICS EUROPE GMBH

Siemensallee 84, Building 7302, 5F,
76187 Karlsruhe, Germany

TEL: +49-721-82447-3

FAX: +49-721-82447-40

EMAIL: Info@everlight-eu.de

GERMANY, MUNICH

EVERLIGHT ELECTRONICS EUROPE GMBH

Rote-Kreuz-Strasse 8, D-85737 Ismaning, Germany

TEL: +49-89-9400336-0

FAX: +49-89-9400336-29

EMAIL: info@everlight-eu.de

NORDIC

EVERLIGHT ELECTRONICS EUROPE GMBH

Isafjordsgatan 22, 164 40 Kista, Stockholm, Sweden

TEL: +46-8375618

EMAIL: nordic@everlight-eu.de