### 5.6mm x 3.0mm SURFACE MOUNT LED LAMP

Part Number: KA-5630SEL2Z4S Hyper Red



ATTENTION OBSERVE PRECAUTIONS FOR HANDLING ELECTROSTATIC DISCHARGE SENSITIVE DEVICES

#### Features


- Size (mm): 5.6 x 3.0 x 0.77
- Suitable for all SMD assembly and solder process.
- Available on tape and reel.
- White SMD package, silicone resin.
- Moisture sensitivity level : level 2a.
- RoHS compliant.

#### **Descriptions**

- The Hyper Red device is based on light emitting diode chip made from AlGaInP.
- Electrostatic discharge and power surge could damage the LEDs.
- It is recommended to use a wrist band or antielectrostatic glove when handling the LEDs.
- All devices, equipments and machineries must be electrically grounded.

#### Applications

- LCD TV / Monitor Backlight.
- Architectural lighting.
- Decorative lighting.

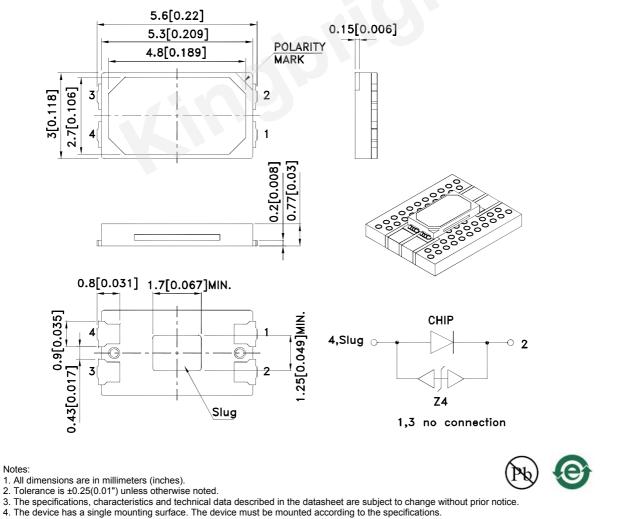


SPEC NO: DSAN3045 APPROVED: Wynec REV NO: V.3B CHECKED: Allen Liu DATE: MAY/18/2016 DRAWN: L.T.Zhang PAGE: 1 OF 8 ERP: 1201008724

### Package Dimensions

### **Handling Precautions**


Compare to epoxy encapsulant that is hard and brittle, silicone is softer and flexible. Although its characteristic significantly reduces thermal stress, it is more susceptible to damage by external mechanical force. As a result, special handling precautions need to be observed during assembly using silicone encapsulated LED products. Failure to comply might lead to damage and premature failure of the LED.

1. Handle the component along the side surfaces by using forceps or appropriate tools.



2. Do not directly touch or handle the silicone lens surface. It may damage the internal circuitry.






3. Do not stack together assembled PCBs containing exposed LEDs. Impact may scratch the silicone lens or damage the internal circuitry.



- 4.1. The inner diameter of the SMD pickup nozzle should not exceed the size of the LED to prevent air leaks.
- 4.2. A pliable material is suggested for the nozzle tip to avoid scratching or damaging the LED surface during pickup.
- 4.3. The dimensions of the component must be accurately programmed in the pick-and-place machine to insure precise pickup and avoid damage during production.



5. As silicone encapsulation is permeable to gases, some corrosive substances such as  $H_2S$  might corrode silver plating of leadframe. Special care should be taken if an LED with silicone encapsulation is to be used near such substances.

DATE: MAY/18/2016 DRAWN: L.T.Zhang

#### **Selection Guide**

Celection Calae							
Part No.	Emitting Color (Material)	Lens Type	lv (cd) [2] @ 150mA		Φν (lm) [2] @ 150mA		Viewing Angle [1]
			Min.	Тур.	Min.	Тур.	2 0 1/2
KA-5630SEL2Z4S	Hyper Red (AlGaInP)	Water Clear	3.6	4.2	12	14	120 °

Notes:

1.  $\theta$ 1/2 is the angle from optical centerline where the luminous intensity is 1/2 of the optical peak value.

2. Luminous intensity/ luminous Flux: +/-15%.\*LEDs are binned according to their luminous flux.

3. Luminous intensity/ luminous Flux value is traceable to CIE127-2007 standards.

### Absolute Maximum Ratings at TA=25°C

Parameter	Symbol	Values	Unit	
Power Dissipation	PD	450	mW	
Junction Temperature [1]	TJ	110	°C	
Operating Temperature	Тор	-40 To +85	°C	
Storage Temperature	Tstg	-40 To +85	°C	
DC Forward Current [1]	lF	150	mA	
Reverse Voltage	VR	5	V	
Peak Forward Current [2]	Iгм	270	mA	
Thermal Resistance [1] (Junction/ambient)	Rth j-a	130	°C/W	
Thermal Resistance [1] (Junction/solder point)	Rth j-S	60	°C/W	
Electrostatic Discharge Threshold (HBM)		8000	V	

Notes:

1. Rth(j-a) Results from mounting on PC board FR4 (pad size≥16 mm<sup>2</sup> per pad)

2. 1/10 Duty Cycle, 0.1ms Pulse Width.

3. Relative humidity levels maintained between 40% and 60% in production area are recommended to avoid the build-up of static electricity – Ref JEDEC/JESD625-A and JEDEC/J-STD-033.

### Electrical / Optical Characteristics at TA=25°C

Parameter	Symbol	Values			l la it
Parameter		Min.	Тур.	Max.	Unit
Wavelength at peak emission IF=150mA	$\lambda$ peak		631		nm
Dominant Wavelength IF=150mA	λ dom [1]		623		nm
Spectral bandwidth at 50% $\Phi$ REL MAX $$ IF=150mA	D λ		25		nm
Forward Voltage IF=150mA	VF [2]	2.0	2.5	3.0	V
Allowable Reverse Current	IR			85	mA
Temperature coefficient of λ peak I⊧=150mA, -10 ° C≤ T≤100 ° C	$TC \lambda$ peak		0.11		nm/° C
Temperature coefficient of $\lambda$ dom IF=150mA, -10 $^{\circ}$ C $\leq$ T $\leq$ 100 $^{\circ}$ C	$TC \lambda$ dom		0.09		nm/° C
Temperature coefficient of VF IF=150mA, -10 $^\circ$ C $\leq$ T $\leq$ 100 $^\circ$ C	TCv		-2.6		mV/° C


Notes:


1.The dominant Wavelength ( $\lambda$  d) above is the setup value of the sorting machine. (Tolerance  $\lambda$  d : ±1nm.)

2.Forward Voltage: +/-0.1V.

3. Wavelength value is traceable to CIE127-2007 standards.


4.Excess driving current and/or operating temperature higher than recommended conditions may result in severe light degradation or premature failure.

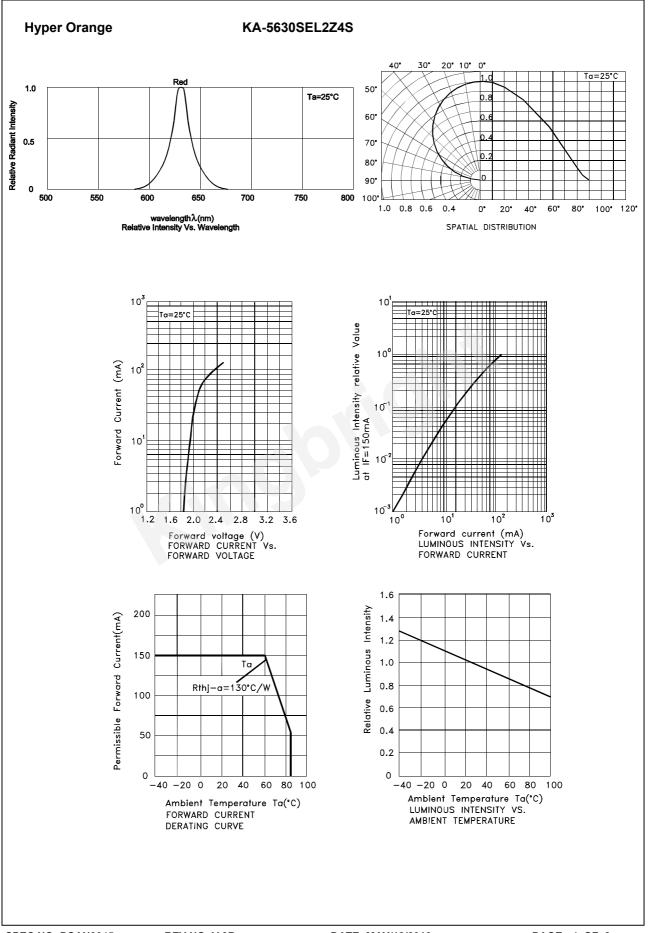


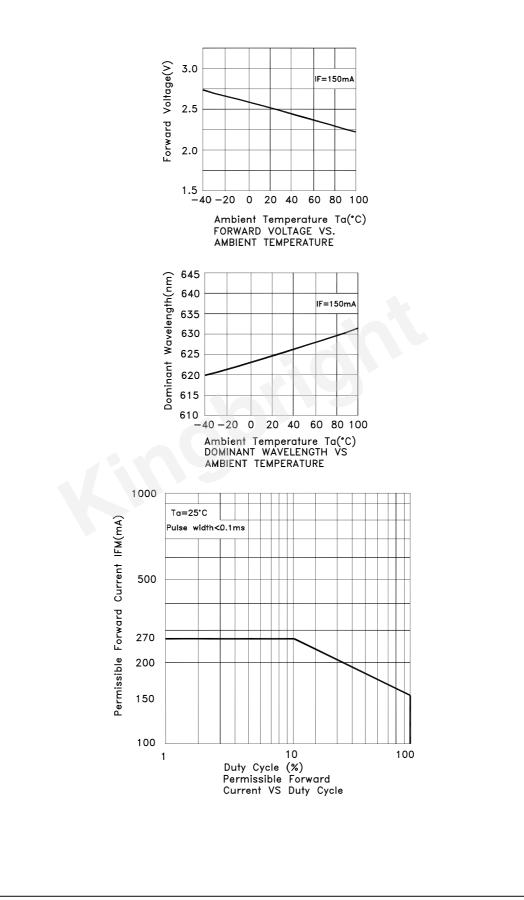


### KA-5630SEL2Z4S

Reflow soldering is recommended and the soldering profile is shown below. Other soldering methods are not recommended as they might cause damage to the product.

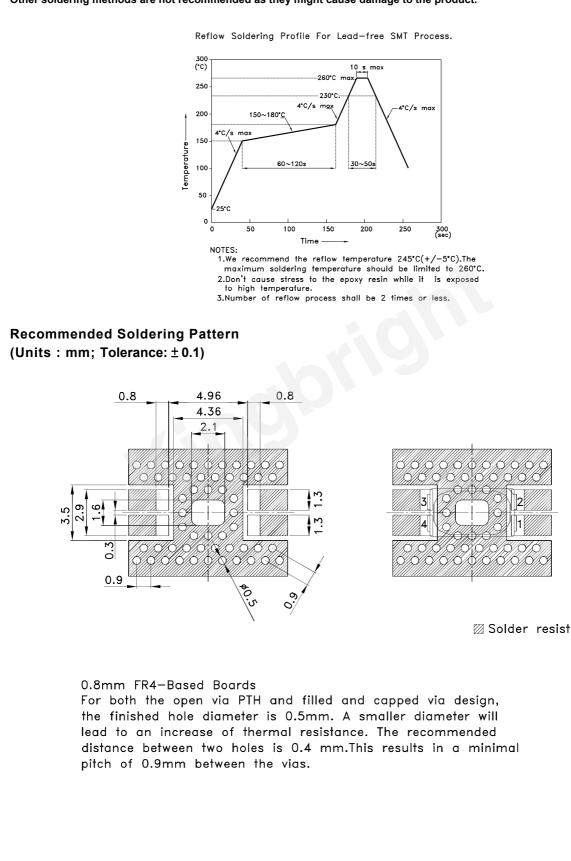

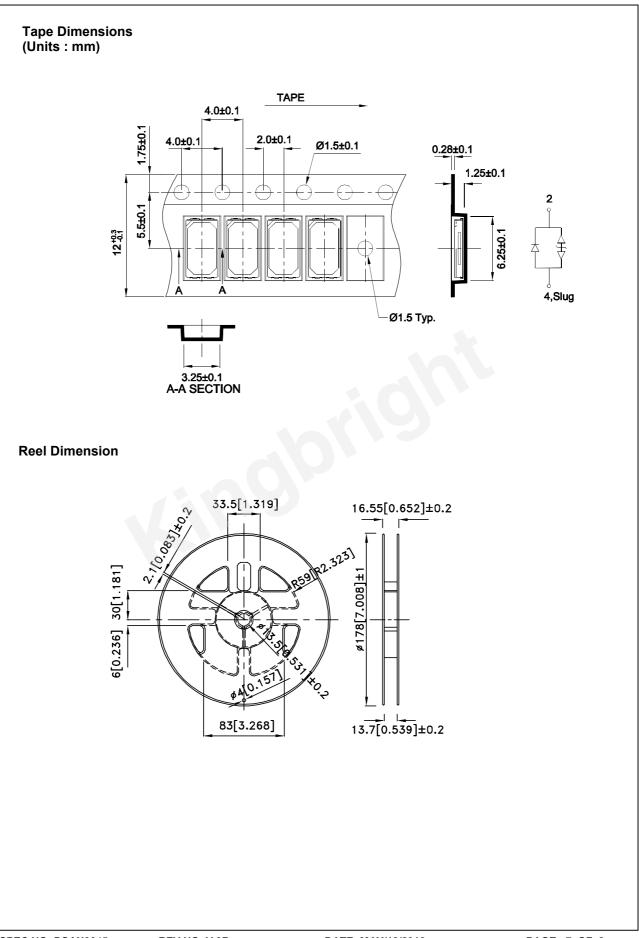

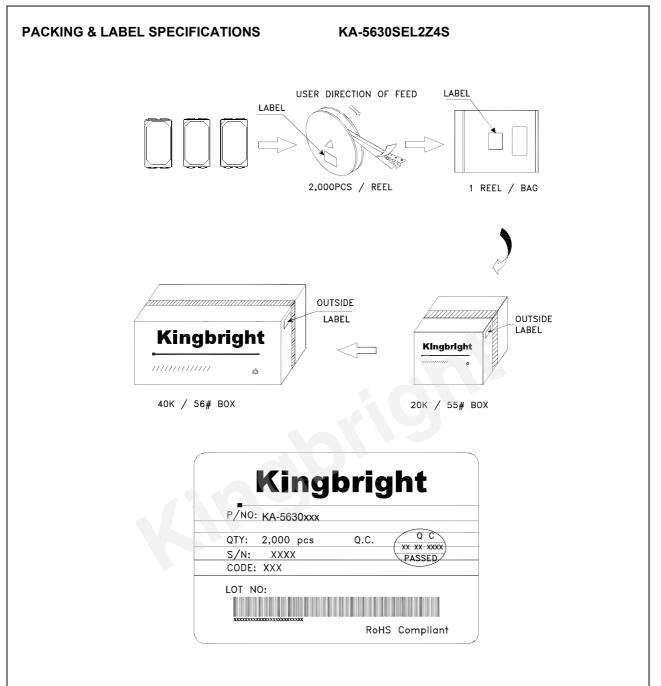

### Terms and conditions for the usage of this document

- 1. The information included in this document reflects representative usage scenarios and is intended for technical reference only.
- 2. The part number, type, and specifications mentioned in this document are subject to future change and improvement without notice. Before production usage customer should refer to the latest datasheet for the updated specifications.
- 3. When using the products referenced in this document, please make sure the product is being operated within the environmental and electrical limits specified in the datasheet. If customer usage exceeds the specified limits, Kingbright will not be responsible for any subsequent issues.
- 4. The information in this document applies to typical usage in consumer electronics applications. If customer's application has special reliability requirements or have life-threatening liabilities, such as automotive or medical usage, please consult with Kingbright representative for further assistance.
- 5. The contents and information of this document may not be reproduced or re-transmitted without permission by Kingbright.
- 6. All design applications should refer to Kingbright application notes available at http://www.kingbright.com/application\_notes

DATE: MAY/18/2016 DRAWN: L.T.Zhang