DISCRETE SEMICONDUCTORS

DATA SHEET

BFS17NPN 1 GHz wideband transistor

Product specification
File under Discrete Semiconductors, SC14

September 1995





NPN 1 GHz wideband transistor

BFS17

DESCRIPTION


NPN transistor in a plastic SOT23 package.

APPLICATIONS

- A wide range of RF applications such as:
 - Mixers and oscillators in TV tuners
 - RF communications equipment.

PINNING

| PIN | DESCRIPTION | | | | | |
|-----|-------------|--|--|--|--|--|
| 1 | base | | | | | |
| 2 | emitter | | | | | |
| 3 | collector | | | | | |

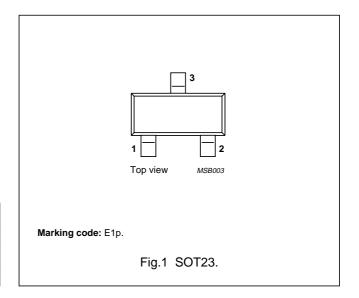

QUICK REFERENCED DATA

| SYMBOL | PARAMETER | CONDITIONS | TYP. | MAX. | UNIT |
|------------------|---------------------------|---|------|------|------|
| V _{CBO} | collector-base voltage | open emitter | _ | 25 | V |
| V _{CEO} | collector-emitter voltage | open base | _ | 15 | V |
| Ic | DC collector current | | _ | 25 | mA |
| P _{tot} | total power dissipation | up to T _s = 70 °C; note 1 | _ | 300 | mW |
| f _T | transition frequency | $I_C = 25 \text{ mA}; V_{CE} = 5 \text{ V}; f = 500 \text{ MHz}; T_j = 25 °C$ | 1 | _ | GHz |
| F | noise figure | I_C = 2 mA; V_{CE} = 5 V; R_S = 50 Ω; f = 500 MHz; T_i = 25 °C | 4.5 | _ | dB |

LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

| SYMBOL | PARAMETER | METER CONDITIONS | | | |
|------------------|---------------------------|--------------------------------------|-----|------|----|
| V _{CBO} | collector-base voltage | open emitter | _ | 25 | V |
| V _{CEO} | collector-emitter voltage | open base | _ | 15 | V |
| V _{EBO} | emitter-base voltage | open collector | _ | 2.5 | V |
| I _C | DC collector current | | _ | 25 | mA |
| I _{CM} | peak collector current | | _ | 50 | mA |
| P _{tot} | total power dissipation | up to T _s = 70 °C; note 1 | _ | 300 | mW |
| T _{stg} | storage temperature | | -65 | +150 | °C |
| Tj | junction temperature | | _ | 150 | °C |

Note to the Quick reference data and the Limiting values

1. T_s is the temperature at the soldering point of the collector pin.

Philips Semiconductors Product specification

NPN 1 GHz wideband transistor

BFS17

THERMAL CHARACTERISTICS

| SYMBOL | PARAMETER | CONDITIONS | VALUE | UNIT |
|---------------------|---|-----------------------------|-------|------|
| R _{th j-s} | thermal resistance from junction to soldering point | up to $T_s = 70$ °C; note 1 | 260 | K/W |

Note

1. $T_{\mbox{\scriptsize S}}$ is the temperature at the soldering point of the collector pin.


CHARACTERISTICS

 $T_j = 25$ °C unless otherwise specified.

| SYMBOL | PARAMETER | CONDITIONS | MIN. | TYP. | MAX. | UNIT |
|------------------|---------------------------|---|------|------|------|------|
| I _{CBO} | collector cut-off current | I _E = 0; V _{CB} = 10 V | _ | _ | 10 | nA |
| h _{FE} | DC current gain | I _C = 2 mA; V _{CE} = 1 V | 25 | 90 | _ | |
| | | $I_C = 25 \text{ mA}; V_{CE} = 1 \text{ V}$ | 25 | 90 | _ | |
| f _T | transition frequency | $I_C = 2 \text{ mA}; V_{CE} = 5 \text{ V}; f = 500 \text{ MHz}$ | _ | 1 | _ | GHz |
| | | $I_C = 25 \text{ mA}; V_{CE} = 5 \text{ V}; f = 500 \text{ MHz}$ | _ | 1.6 | _ | GHz |
| C _c | collector capacitance | $I_E = i_e = 0$; $V_{CB} = 10 \text{ V}$; $f = 1 \text{ MHz}$ | _ | 0.8 | 1.5 | pF |
| Ce | emitter capacitance | $I_C = i_c = 0$; $V_{EB} = 0.5 \text{ V}$; $f = 1 \text{ MHz}$ | _ | _ | 2 | pF |
| C _{re} | feedback capacitance | I _C = 1 mA; V _{CE} = 5 V; f = 1 MHz | _ | 0.65 | _ | pF |
| F | noise figure | I_C = 2 mA; V_{CE} = 5 V; R_S = 50 Ω ; f = 500 MHz | _ | 4.5 | _ | dB |


NPN 1 GHz wideband transistor

BFS17

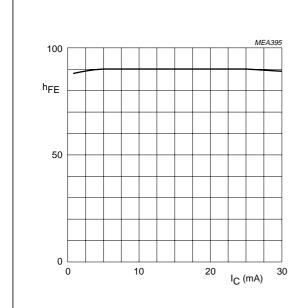


 $V_{CE} = 1 \text{ V}; T_j = 25 \,^{\circ}\text{C}.$

Fig.2 DC current gain as a function of collector current.

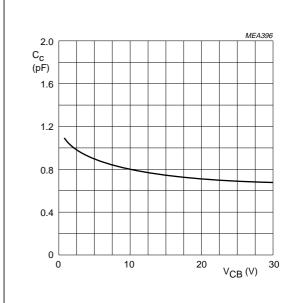


 $I_E = i_e = 0$; f = 1 MHz; $T_j = 25$ °C.

Fig.3 Collector capacitance as a function of collector-base voltage.

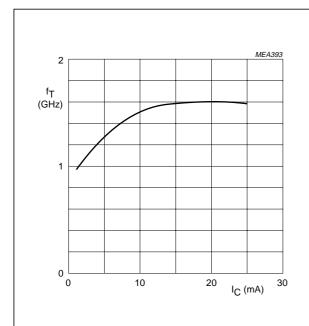

 V_{CE} = 5 V; f = 500 MHz; T_j = 25 °C.

Fig.4 Transition frequency as a function of collector current.

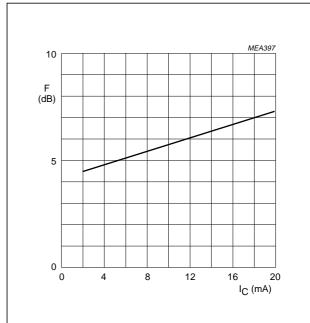

 V_{CE} = 5 V; R_S = 50 Ω ; f = 500 MHz; T_j = 25 °C.

Fig.5 Minimum noise figure as a function of collector current.


NPN 1 GHz wideband transistor

BFS17

PACKAGE OUTLINE

Plastic surface mounted package; 3 leads

SOT23

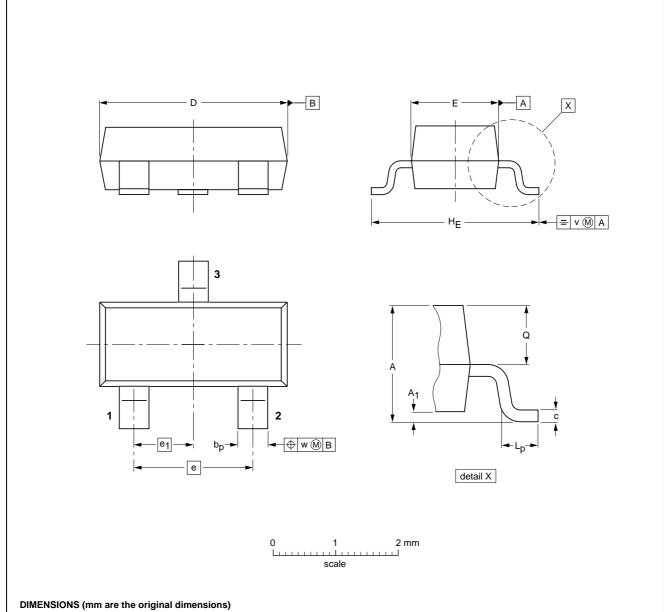

| UNIT | Α | A ₁ max. | bp | С | D | E | е | e ₁ | HE | Lp | Q | ٧ | w |
|------|------------|------------------------|--------------|--------------|------------|------------|-----|----------------|------------|--------------|--------------|-----|-----|
| mm | 1.1 0.9 | 0.1 | 0.48 0.38 | 0.15 0.09 | 3.0 2.8 | 1.4 1.2 | 1.9 | 0.95 | 2.5 2.1 | 0.45 0.15 | 0.55 0.45 | 0.2 | 0.1 |

| OUTLINE | | REFERENCES | | | EUROPEAN | | |
|---------|-----|------------|------|--|------------|------------|--|
| VERSION | IEC | JEDEC | EIAJ | | PROJECTION | ISSUE DATE | |
| SOT23 | | | | | | 97-02-28 | |

Philips Semiconductors Product specification

NPN 1 GHz wideband transistor

BFS17

DEFINITIONS

| Data sheet status | |
|---------------------------|---|
| Objective specification | This data sheet contains target or goal specifications for product development. |
| Preliminary specification | This data sheet contains preliminary data; supplementary data may be published later. |
| Product specification | This data sheet contains final product specifications. |
| Limiting values | |

Limiting values given are in accordance with the Absolute Maximum Rating System (IEC 134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of the specification is not implied. Exposure to limiting values for extended periods may affect device reliability.

Application information

Where application information is given, it is advisory and does not form part of the specification.

LIFE SUPPORT APPLICATIONS

These products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Philips customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips for any damages resulting from such improper use or sale.