

AN5179K

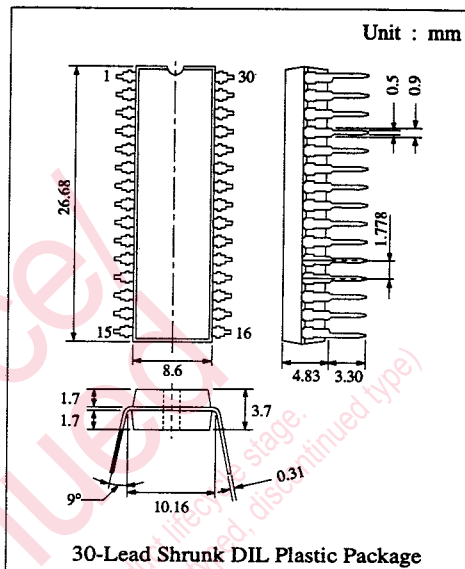
VIF, SIF Circuit for TV/VCR

■ Description

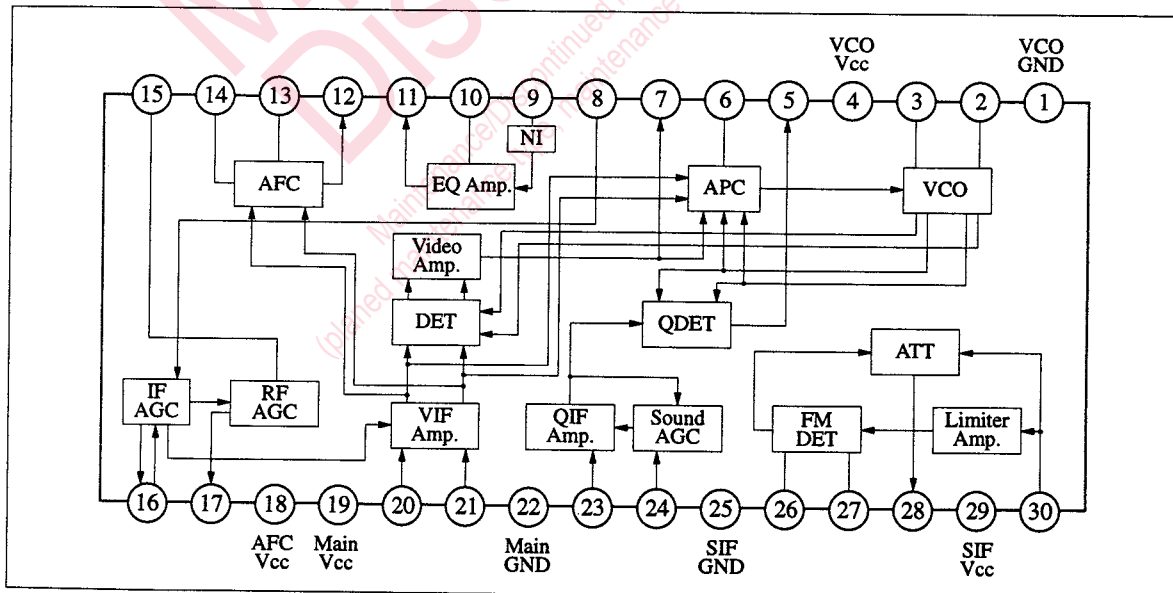
The AN5179K is an integrated circuit for TV/VCR VIF and SIF and improves the audio performance by using the QSS (Quasi Separate Sound) method and provides low power consumption with power supply of 5V.

■ Features

- PLL complete synchronous detection
- Reduction of buzz by QSS (Quasi Separate Sound) circuit
- External AGC pin for CATV disscramble attached
- AFC output circuit can use another power supply, Vcc2 (5V~12V)
- Built-in DC volume control circuit
- Power supply operating range Vcc1 : 5V
Vcc2 (5V~12V)
- 30-lead shrunk DIL plastic package.



■ Block Diagram



■ Absolute Maximum Ratings (Ta=25°C)

Item	Symbol	Rating	Unit
Supply Voltage	V _{4,9,29-1,22,25}	6	V
Supply Voltage	V _{18-1,22,25}	12.5	V
Supply Current	I _{cc}	120	mA
Power Dissipation (Ta=70°C)	PD	720	mW
Operating Ambient Temperature	T _{opr}	-20 ~ +70	°C
Storage Temperature	T _{stg}	-55 ~ +150	°C

■ Recommended Operating Range (Ta=25°C)

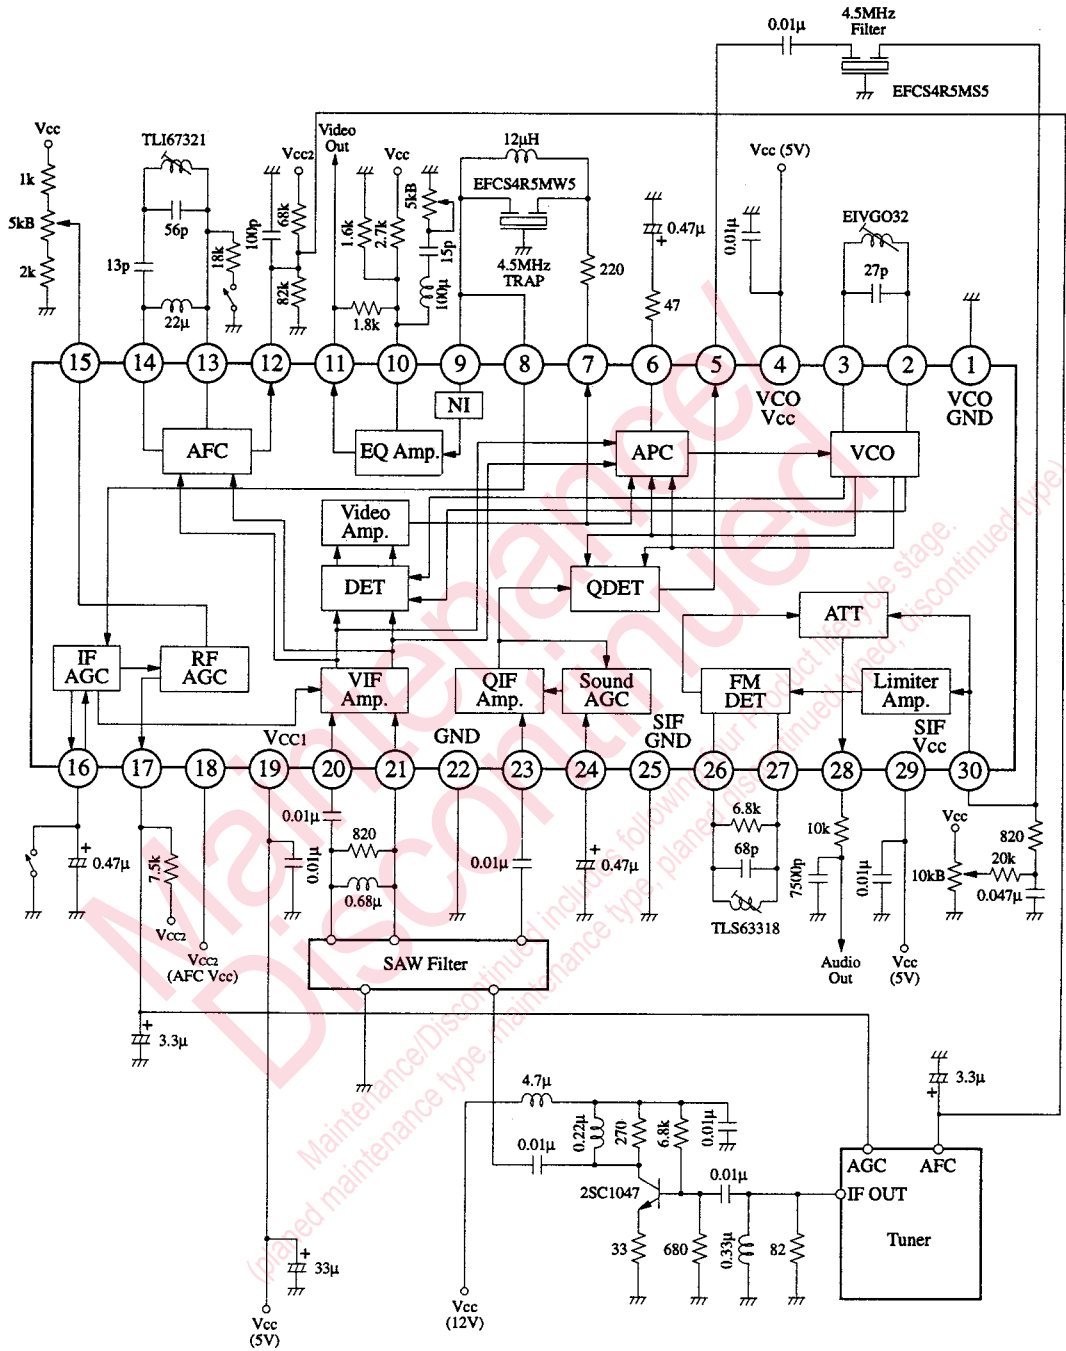
Item	Symbol	Range
Operating Supply Voltage Range	V _{cc1}	4.5V ~ 5.5V
Operating Supply Voltage Range	V _{cc2}	V _{cc1} ~ 12V

■ Electrical Characteristics (Ta=25°C)











Item	Symbol	Condition	min.	typ.	max.	Unit
Video System						
Video Detection Output	V _{o11}	Typical colour signal (white colour contained) m=87.5%, V _{in} =80dB μ	1.75	2	2.25	V _{p-p}
Periodic Peak Value Voltage	V _p		0.75	0.95	1.15	V
Input Sensitivity*	V _{SV}	V _{o11} = -3dB		52	56	dB μ
Maximum Allowable Input*	V _{MAX.V}		105	110		dB μ
Video Frequency Characteristics (2)*	f _{c(2)}	V _{o11} = -3dB	8	10	12	MHz
S/N Ratio*	S/N		50	55		dB
Differential Gain*	DG			2	6	%
Differential Phase*	DP			2	5	deg
Intermodulation*	IM		43	49		dB
AFC Phase Detector Sensitivity	μ _{AFC}	R _L = 68k Ω /82k Ω	20	30	40	mV/kHz
APC Pull-in Range (h)	f _{ph}		1.5			MHz
APC Pull-in Range (l)	f _{pl}				-1.5	MHz
VCO Control Sensitivity	β	V ₆ = 2.0V ~ 2.2V	3.5	5.5	7.5	kHz/mV
APC Detection Sensitivity	μ _{APC}	f _{in} = f _o \pm 500KHz	0.12	0.2	0.3	mV/kHz
Audio System						
QDET Output Level (R _D =10k)	V _{QDET}		110	115	120	dB μ
Input Sensitivity*	V _{SQ}	V _{QDET} = -3dB		55	60	dB μ
Maximum Allowable Input*	V _{max.Q}		105	110		dB μ
Audio Detection Output	V _{o28}	f _o =4.5MHz, V _{in} =100dB μ Δ f=±25kHz, f _m =400Hz	500	630	760	mV _{rms}
Input Limiting Voltage*	V _{i(lim)}	V _{o28} = -3dB		48		dB μ
AM Rejection*	AMR	V _{in} = 90dB μ	46	60		dB
Total Harmonic Distortion*	THD		0	0.3	1	%
Maximum Attenuation*	Att	V ₃₀ \leq 1.5V	70			dB
DC Characteristics						
Circuit Current Pins 4, 18, 19, 29	I ₄₊₁₈₊₁₉₊₂₉		55	70	90	mA
Video Output Pin Voltage	V ₁₁		3	3.5	4	V
Audio Output Pin Voltage	V ₂₈		1.1	1.5	1.9	V

Note *: The above characteristics values are of reference values for design but not guaranteed values.








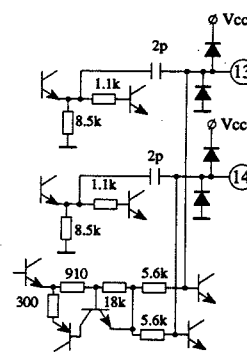

■ Application Circuit



Pin Descriptions

Pin No.	Pin Name	Typical Waveform	Description	I/O Impedance	Equivalent Circuit
1	GND (VCO)		GND pin (VCO system)		
2	VCO COIL		External pin for VCO oscillating coil		
3	VCO COIL				
4	Vcc (VCO)		Power supply pin : 5V (VCO system)		
5	QDET OUT	 (FM)	Output pin when an audio carrier was detected using the QSS method	170Ω	
6	APC LPF		External pin for time constant of APC filter	10kΩ	
7	DET OUT		VIF detection signal output pin	30Ω	
8	AGC IN		Input pin for IF AGC voltage from the outside		

■ Pin Descriptions (Continue)

Pin No.	Pin Name	Typical Waveform	Description	I/O Impedance	Equivalent Circuit
9	NI IN		Input pin for noise inverter circuit		
10	FB		Negative feedback circuit for equalizer amplifier		
11	VOUT		Video signal output pin	20Ω	
12	AFC OUT		AFC voltage output pin		
13	AFC COIL		External pin for AFC coil		
14	AFC COIL				
15	RF AGC ADJ		RF AGC setting voltage adjusting pin		

Pin Descriptions (Continue)

Pin No.	Pin Name	Typical Waveform	Description	I/O Impedance	Equivalent Circuit
16	IF AGC		External pin for time constant of VIF AGC filter		
17	RF AGC OUT		RF AGC voltage output pin		
18	Vcc (AFC)		Power supply pin : 5V~12V (AFC output circuit)		
19	Vcc		Power supply pin : 5V (VIF system)		
20	IF IN		Video carrier input pin	1k Ω	
21	IF IN	<p>Video carrier input pin</p>			
22	GND (VIF)		GND pin (VIF system)		
23	QIF IN	<p>(FM)</p>	Input pin when an audio carrier is detected using the QSS method	1k Ω	

■ Pin Descriptions (Continue)

Pin No.	Pin Name	Typical Waveform	Description	I/O Impedance	Equivalent Circuit
24	QAGC		External pin for time constant of audio carrier AGC filter when the QSS method is used		
25	GND (SIF)		GND pin (SIF system)		
26	SIF COIL		External pin for SIF detecting coil	3.5kΩ	
27	SIF COIL				
28	SOUT		Audio signal output pin	200Ω	
29	Vcc (SIF)		Power supply pin : 5V (SIF system)		
30	SIF IN		SIF signal input pin		

Request for your special attention and precautions in using the technical information and semiconductors described in this book

- (1) If any of the products or technical information described in this book is to be exported or provided to non-residents, the laws and regulations of the exporting country, especially, those with regard to security export control, must be observed.
- (2) The technical information described in this book is intended only to show the main characteristics and application circuit examples of the products. No license is granted in and to any intellectual property right or other right owned by Panasonic Corporation or any other company. Therefore, no responsibility is assumed by our company as to the infringement upon any such right owned by any other company which may arise as a result of the use of technical information described in this book.
- (3) The products described in this book are intended to be used for standard applications or general electronic equipment (such as office equipment, communications equipment, measuring instruments and household appliances).
Consult our sales staff in advance for information on the following applications:
 - Special applications (such as for airplanes, aerospace, automobiles, traffic control equipment, combustion equipment, life support systems and safety devices) in which exceptional quality and reliability are required, or if the failure or malfunction of the products may directly jeopardize life or harm the human body.
 - Any applications other than the standard applications intended.
- (4) The products and product specifications described in this book are subject to change without notice for modification and/or improvement. At the final stage of your design, purchasing, or use of the products, therefore, ask for the most up-to-date Product Standards in advance to make sure that the latest specifications satisfy your requirements.
- (5) When designing your equipment, comply with the range of absolute maximum rating and the guaranteed operating conditions (operating power supply voltage and operating environment etc.). Especially, please be careful not to exceed the range of absolute maximum rating on the transient state, such as power-on, power-off and mode-switching. Otherwise, we will not be liable for any defect which may arise later in your equipment.
 - Even when the products are used within the guaranteed values, take into the consideration of incidence of break down and failure mode, possible to occur to semiconductor products. Measures on the systems such as redundant design, arresting the spread of fire or preventing glitch are recommended in order to prevent physical injury, fire, social damages, for example, by using the products.
- (6) Comply with the instructions for use in order to prevent breakdown and characteristics change due to external factors (ESD, EOS, thermal stress and mechanical stress) at the time of handling, mounting or at customer's process. When using products for which damp-proof packing is required, satisfy the conditions, such as shelf life and the elapsed time since first opening the packages.
- (7) This book may be not reprinted or reproduced whether wholly or partially, without the prior written permission of our company.