
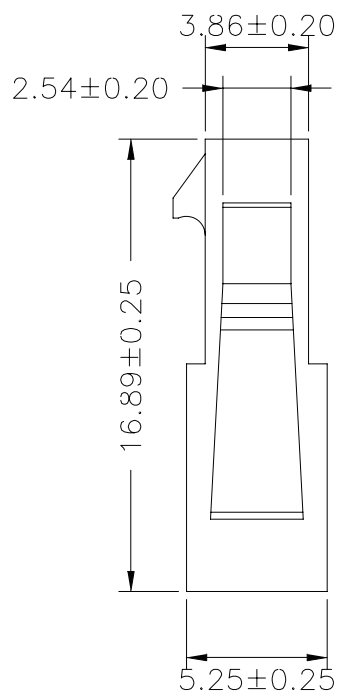


SPECIFICATIONS

Current Rating: 5A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1500V AC/minute
 Material: Nylon 66,UL94V-2

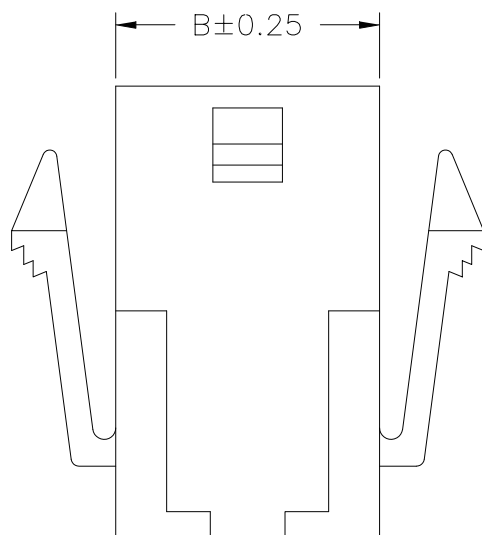

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
MIF-PH-1X02	3.00	6.85
MIF-PH-1X03	6.00	9.85
MIF-PH-1X04	9.00	12.85
MIF-PH-1X05	12.00	15.85
MIF-PH-1X06	15.00	18.85
MIF-PH-1X07	18.00	21.85
MIF-PH-1X08	21.00	24.85
MIF-PH-1X09	24.00	27.85
MIF-PH-1X10	27.00	30.85
MIF-PH-1X11	30.00	33.85
MIF-PH-1X12	33.00	36.85

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT/mm
 DATE

SCALE 1:1


SIZE A4

PJECTION

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±



ORDER INFORMATION

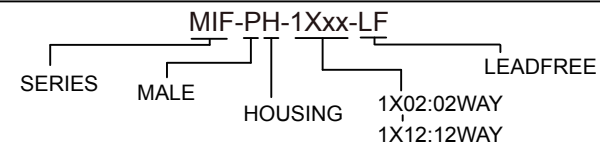

DESCRIPTION: 3.00mm PITCH HOUSING-PLUG, SINGLE ROW, MICRO-FIT