
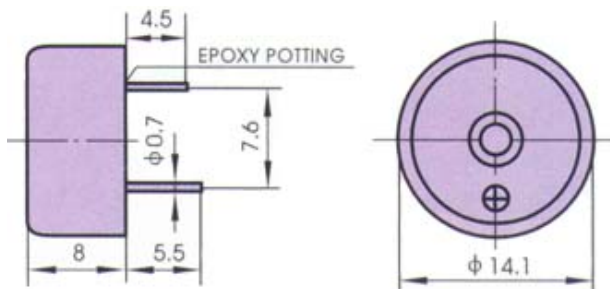


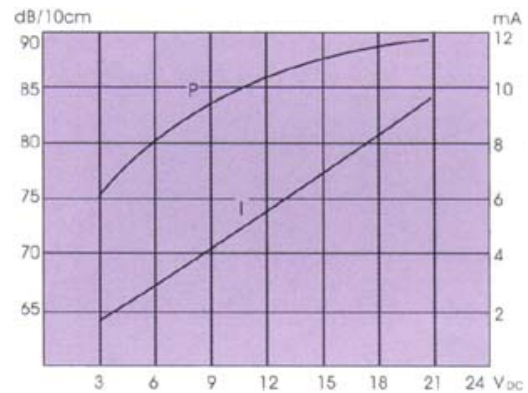

- **EFM-250**

**FEATURES:**

- SMT inside
- Small size
- Sealed type for wave soldering and washable request
- Low current consumption

DIMENSIONS: (Unit: mm)**CHARACTERISTICS:**

Note: EFM-250 is adopted with epoxy potting at the bottom.

ELECTRICAL SPECIFICATIONS :

Model No.	EFM-250
Min. Sound Pressure Level (dB)	85 /12V _{DC} /10cm
Rated Voltage (V _{DC})	12
Operating Voltage (V _{DC})	6 ~ 16
Max. Consumption (mA)	8 /12V _{DC}
Oscillating Frequency (kHz)	4.0 ± 0.5
Tone Nature	Continuous
Operating Temperature (°C)	-20 ~ +60
Weight (g)	1.3
Case Material/Colour	PC/Black

PACKING INFORMATION :

Packing :	5000 pcs per export carton
Carton Size :	47 X 30.5 X 33 cm
G. Weight :	8 kgs
N. Weight :	6.5 kgs