

End-product drawing

REV.	DESCRIPTION	DESIGN	DATE
(X1)	NEW DRAWING	PDH	2019/10/10

NOTES:


1. MATERIAL: PA66、BRASS、SILICONE;
2. CERTIFICATION: ROHS/cUL/TUV/SAA/CE;
3. FIRE-PROOT: UL94-V2。
4. NO DEFECT IN APPEARANCE;
5. UNITS: mm;
6. CONDUCTION TEST: THE TWO ENDS OF THE 3 CORE JOINTS ARE RESPECTIVELY CONNECTED
7. A、MAXIMUM CURRENT-CARRYING CAPACITY: 400V/17.5A
 B、TEST VOLTAGE: 2500V
 C、SUITABLE FOR CABLES CROSS SECTIONS: 0.5-1.5mm²
 D、OPERATING TEMPERATURE RANGE: -40~+105°C
 E、PROTECTION CLASS: IP68




3 Pins



Silicone parts




φB	Wire OD
φ10.2	φ7-10mm
φ6.5	φ3.5-7mm

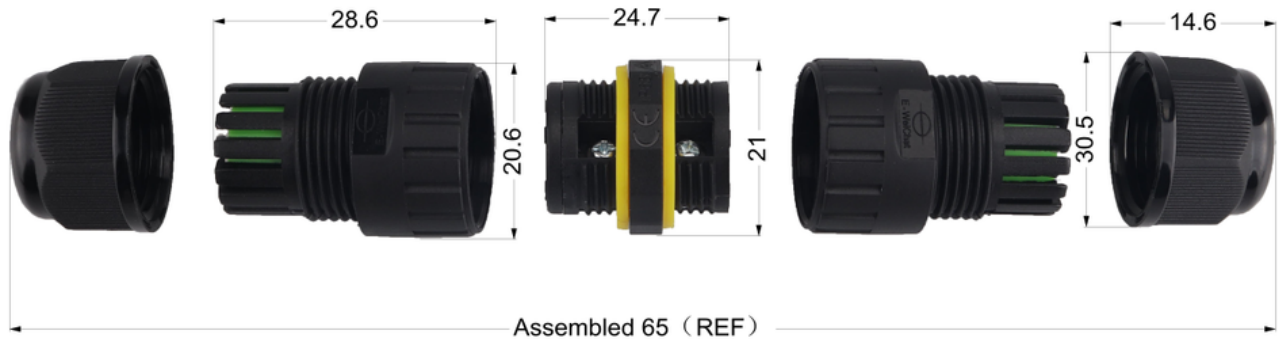

Weight	MEAS	Each carton number	G. W.
18.6g	42*30*34cm	1000pcs	19.4Kg

UNLABELED TOLERANCE			
X.	±0.35	X.XX	±0.20
X.X	±0.25	X.XXX	±0.10



UNITS	mm	DRAW	PDH	2019/10/10	PART NO.	EW-MI6-3P
SCALE	1:1	CHKD			DWG NO	EW-MI6-3P
SHEET	1/1	APPD			TITLE	Waterproof connetor

FUCON