


## Data sheet

Commercial Art.No.: 25.325.3753.0

PCB connector 8113 B / 7 VR OB

PCB female connector with screw connection with rising cage clamp system, 7 poles, max. cross section: 2.5 mm<sup>2</sup>, pitch: 5 mm, type of packing: carton, color: grey

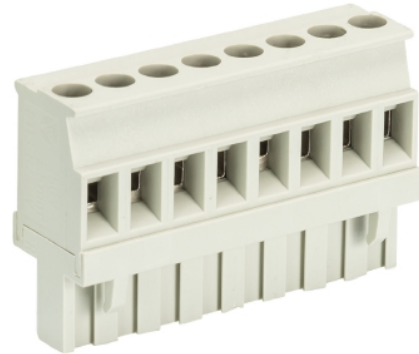

Commercial Art.No.	25.325.3753.0
EAN	4015573183612
Order Unit	50

Certificates / Approvals



## Technical data

### General

Modular spacing	5 mm
Connection type	screw connection
Soldering process	None
Packaging	Carton
Number of poles	7
Marking	No
Fastening	None
Mating direction towards connector	90°

### Technical data

Nominal cross section	2.5 mm <sup>2</sup>
Rated current	12 A
Overvoltage Category I	1000 V
Overvoltage Category II	400 V
Overvoltage Category III	250 V
Rated impulse voltage	4 kV
Wire strip length	6 mm

### Connection Data

Minimum cross section solid	0.14 mm <sup>2</sup>
Maximum cross section solid	2.5 mm <sup>2</sup>
Minimum cross section fine stranded	0.14 mm <sup>2</sup>
Maximum cross section fine stranded	2.5 mm <sup>2</sup>
Wire strip length	6 mm

**Technical Data UL/CSA**

Cross section UL	22-12 AWG
Voltage UL	300 V
Current field wiring	15 A
Current factory wiring	15 A
Cross section CSA	22-12 AWG
Voltage CSA	300 V
Current CSA	15 A

**Other**

Type of insulation material	Thermoplastic
Color	Grey
Height	26 mm
Length	35 mm
Depth	12.6 mm
Material attachment screw	CuSn/Steel
Material contact base	CuSn
Material contact surface	Sn

**Classification**


ECLASS 11	
ECLASS 8.1	27440402
ETIM 7.0	EC002637
ETIM 6.0	EC002637
ETIM 5.0	EC002637
ETIM 4.0	EC002637

**Product compliance**

ROHS conformity status	Compliant/Exempted
ROHS exceptions	III-6(c)
REACH-SVHC conformity status	Duty-To-Declare
REACH-SVHC substances	Lead
REACH-SVHC CAS numbers	7439-92-1

**Fits with**

Commercial Art.No.:	Article-type description:	Description:
25.332.3753.0	PCB pin header 8113 S / 7 W OB	PCB pin header, connection method depends on used socket part , 7 poles, pitch: 5 mm, type of packing: carton, color: grey
99.207.9996.0	PCB pin header 8113 S / 7 G OB OF	PCB pin header, connection method depends on used socket part , 7 poles, pitch: 5 mm, type of packing: carton, color: grey
25.330.3753.0	PCB pin header 8113 S / 7 G OB	PCB pin header, connection method depends on used socket part , 7 poles, pitch: 5 mm, type of packing: carton, color: grey
25.394.3753.0	PCB pin header 8113 S / 7 S OB	PCB pin header, connection method depends on used socket part , 7 poles, pitch: 5 mm, type of packing: carton, color: grey
27.336.0753.0	PCB pin header 8113 SEG/ 7/14 W OB	PCB pin header, 7 poles, pitch: 5 mm, type of packing: carton, color: grey
27.334.0753.0	PCB pin header 8113 SEG / 7/ 14 G OB	PCB pin header, 7 poles, pitch: 5 mm, type of packing: carton, color: grey

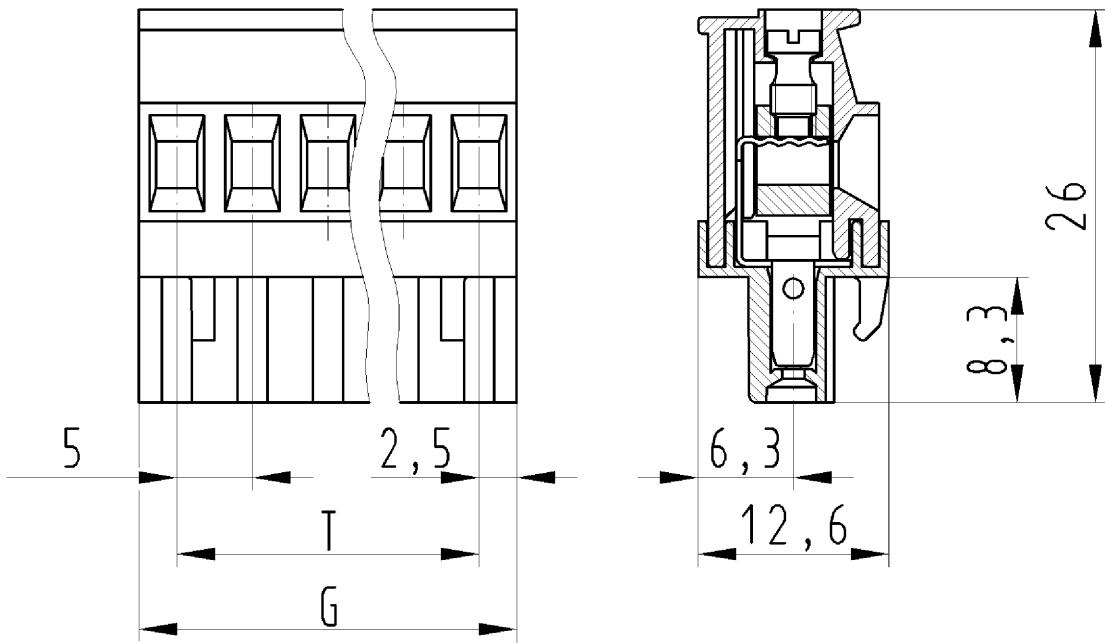

für folgende Tabellen-Zchnng.:  
 25.325.5453.F 8113 B/...VR OB

LP. STECKKLEMME  
 25.325.3253.0 10W  
 30.10.2007 DÜT  
 M 2:1