


N=Number of contacts/3

color: green , black
pitch: 3.50/3.81/5.0/5.08mm
certification: UL, CE, VDE, CQC
Type: Female
wire range: 28-16AWG
Material: PA66 brass

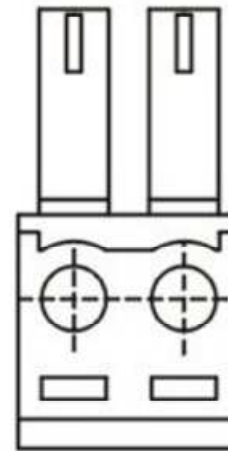

1. Technical parameter:

- manufactured using high-grade materials
- nickel-plated copper alloy metal bodies
- tin-plated phosphor bronze sockets
- UL 94V0 plastic housings

2. Data of pluggable terminal block:

- Spacing between positions 5mm
- UL rating, 28 to 16 AWG, 8 amps, 300 volts
- UL94V0 housings, completely plated metal parts
- Single piece housing, 2 – 24 position
- Wire entry horizontal to PCB
- Rising cage
- RoHS compliant
- Housing and header polarized
- Keying plugs available for plugs and headers

HOW TO ORDER

