


### Features

- 136.2mm\*105.3mm
- Working Temp.: 0~70 Celsius
- TI DM3730 microprocessor with 800MHz ARM Cortex-A8 RISC core and 800MHz TMS320C64x+TM DSP core
- Power supply: +5V
- 512MB DDR SDRAM, 32bit, 200MHz
- 512MB Nand Flash
- 8\*512MB iNAND, 4bit
- 24-bit color TFT LCD & TSP interface
- DVI high-resolution image output port
- S-Video display interface
- Audio input interface
- 2-channel Audio output interfaces
- 10/100M Ethernet port (RJ45)
- 1 High-speed USB2.0 OTG port
- 4 High-speed USB2.0 Host ports
- 3 Serial ports
- Camera interface
- SD/MMC card slot
- Expansion connector (McSPI, McBSP, I2C, HDQ, GPIO are led out from this connector)
- 14-pin JTAG interface
- 6\*6 Keyboard interface
- 4 Buttons
- 5 LEDs
- Supports Linux2.6 and Android2.2
- Supports WinCE6.0

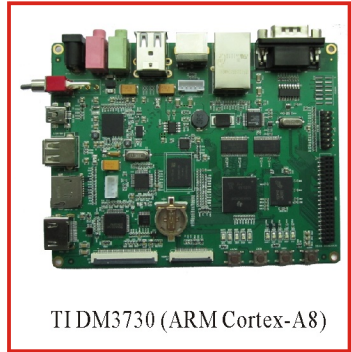

TI DM3730 (ARM Cortex-A8)