


Data sheet

Commercial Art.No.: 80.010.0011.0

Relay module WR1-230-1W-250V4A

relay module, contact Assignment: 1 change-over contact gold plated, housing WEB 1002, dimensions: 12,5x80x70 mm (WxHxD), input voltage: 230 V AC, output voltage: 250 V AC, output current: 4 A AC, type: WR 1-230-1W-250V 4A

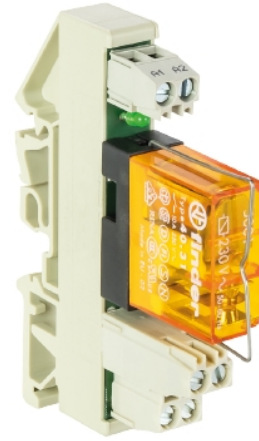

Commercial Art.No.	80.010.0011.0
EAN	4015573362819
Order Unit	10

Technical data

General

Connection type	screw connection
Number of change-over contacts	1
Detachable clamps	No
Forced-guided contacts	No
Complete with socket	yes
Degree of protection (IP)	IP20

Technical data

Type of excitation	AC/DC
Rated frequency, auxiliary-/control circuit	50 - 60
Min. rated frequency, auxiliary/control current circuit	50 Hz
Max. rated frequency, auxiliary/control current circuit	60 Hz
Min. nominal voltage DC	230 V
Lower nominal voltage DC	207 V
Upper nominal voltage DC	243.8 V

Dimensions

Depth	70 mm
Width	12.5 mm
Height	80 mm

Classification

ECLASS 11	
ECLASS 8.1	27371601

ETIM 7.0	EC001437
ETIM 6.0	EC001437
ETIM 5.0	EC001437
ETIM 4.0	EC001437

Product compliance

ROHS conformity status	Compliant/Exempted
ROHS exceptions	III-6(c)
REACH-SVHC conformity status	Duty-To-Declare
REACH-SVHC substances	Hexahydromethylphthalic-anhydride; Lead
REACH-SVHC CAS numbers	25550-51-0; 7439-92-1