


Cell(电芯):	LP382024	Date code(喷码):	Inner controlling standard(内控标准)		
Battery Specification (电池参数)	Min. Capacity 最低容量 (mAh) (0.2C, 25±3°C) *Single battery capacity (单体电池容量)	140	*PCM protection (保护板参数)	Overcurrent Detection(A) (过流值)	2-7
	Typical Capacity 典型容量 (mAh) (0.2C, 25±3°C) *Single battery capacity (单体电池容量)	150		Overcharge Detection Voltage(V) (过充保护电压)	4.28±0.05
	Nominal Voltage 标称电压 (V)	3.7		Overdischarge Detection Voltage(V) (过放保护电压)	3.0±0.1
	Internal impedance 内阻(≦) (mΩ, AC 1KHZ)	400	Ambient Conditions (工作环境)	Charge Temp. 充电温度 (°C)	0-45
				Discharge Temp. 放电温度 (°C)	-20-60
				Humidity(湿度)	65±20%

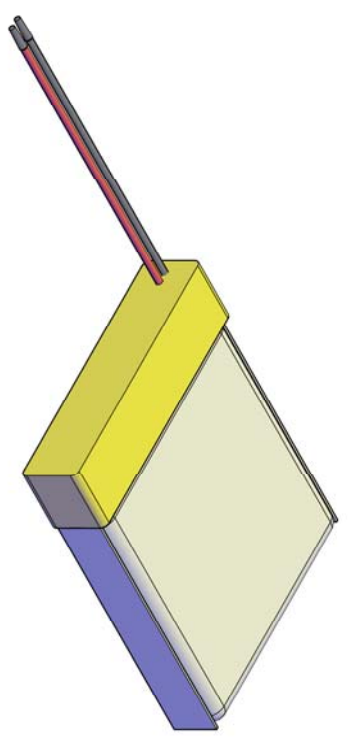

Remark(备注):  
 1. No scratch, discoloration and leakage on the appearance of the cell(电池表面无划痕、变形、污点及漏液等现象).  
 2. RoHS compliant(严格按照ROHS要求生产).

EEMB BATTERY		Drawn:	Moyongdi	Revise No.:	E4-2009
		Checked 1:	Jane	Projection:	
Title	LP382024-PCM-LD	Checked 2:	Keyan	Page:	1/1
File NO.	A01969	Approved:		Scale:	2 : 1
		Draw Date:	2010/03/02	Unit:	mm