


产品序列号
随产品出厂自动生成;

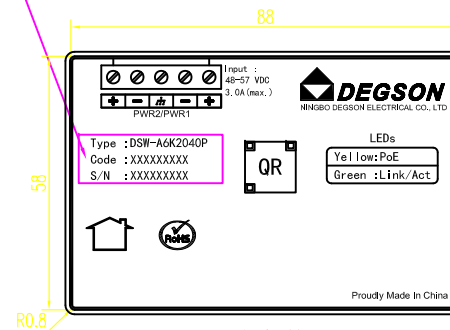

哑银标签
scale: 1:1

尺寸公差(mm)					0.05/10 ±1*
0 ~ 30	>30 ~ 60	>60 ~ 100	>100 ~ 150	>150	
±0.20	±0.30	±0.50	±0.70	±1.00	

端口数	6口, 千兆2光4电
防护等级	IP30
工作温度	-40~+75℃
电源	支持48-57 VDC/3.0A(max.)
安装方式	DIN35mm

印字为激光打标, 印字内容清晰、无断线等/Printing for laser marking,printing content is clear ,no broken line,ect

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility, model or designs registrations. 除非给予明确授权, 否则禁止转让、复制、利用、交流本文件内容。未经明确授权, 严禁复制或传播。本公司保留对专利及发明、实用新型和外观设计的所有权利。

MATERIAL:	/	SURFACE:	/
MAT.NO.:		宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
STATUS:	/		
APPD:		Description:	
CHKD:		DSW-A6K2040P	
DRFT:	luo DP 2021.09.27	DRAWING NO.:	200015108
REV	ECN	DESCRIPTION	DRFT
01		依照实物更新标签内容	Luo DP 2021.11.19
SIZE: A4	mm (inch)	TYPE: PRODUCT DRAWING	SCALE: 1:1
		SHEET	1/1