

SPECIFICATIONS

Housing: Thermoplastic (UL94 V-0)
 Terminal: Phosphor Bronze, Gold Plating On Contact Area,
 Tin Plating On Solder Tail.
 Current Rating: 0.5A Max.
 Dielectric Withstanding Voltage: 500V AC R.M.S. For 1 Minute
 Insulation Resistance: 1000 Megohms Min. At DC 500V
 Contact Resistance: 50 Milliohms Max.
 Durability: 5000 Cycles
 Manual Soldering: 360°C, 3 Sec. Max.
 Vapor Phase: 215°C, 30 Sec. Max.
 IR Reflow: 260°C, 15 Sec. Max.
 Operation Temperature: -25°C To +85°C
 RoHS Compliant
 Part No:

A
B
C
D
E
F
G
H


A
B
C
D
E
F
G
H


APPD. 核准 HELEN		 SCALE 比例 參考	TOLERANCE 容許公差 .X ±0.38 .XX ±0.25 ANG. ±1°	PART NAME 品名 SMART/SIM CARD HINGED COVER 6P H:2.5mm SELECTIVE GOLD SMT 90° W/O POST W/OSWITCH ROW P=25.22 BLACK INSULATOR REEL PACKING ROHS
DWG. 製圖 ABBY			UNIT 單位 MM	SIZE. 紙張尺寸 A 4
DATE 制表日 2015/09/14		PAGE 張數 1 OF 2	REV. 版次 B	PART NO. 料號 C0612-06DBSBBRR

RoHS
Compliant

HSM 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

1 2 3 4 5 6 7 8

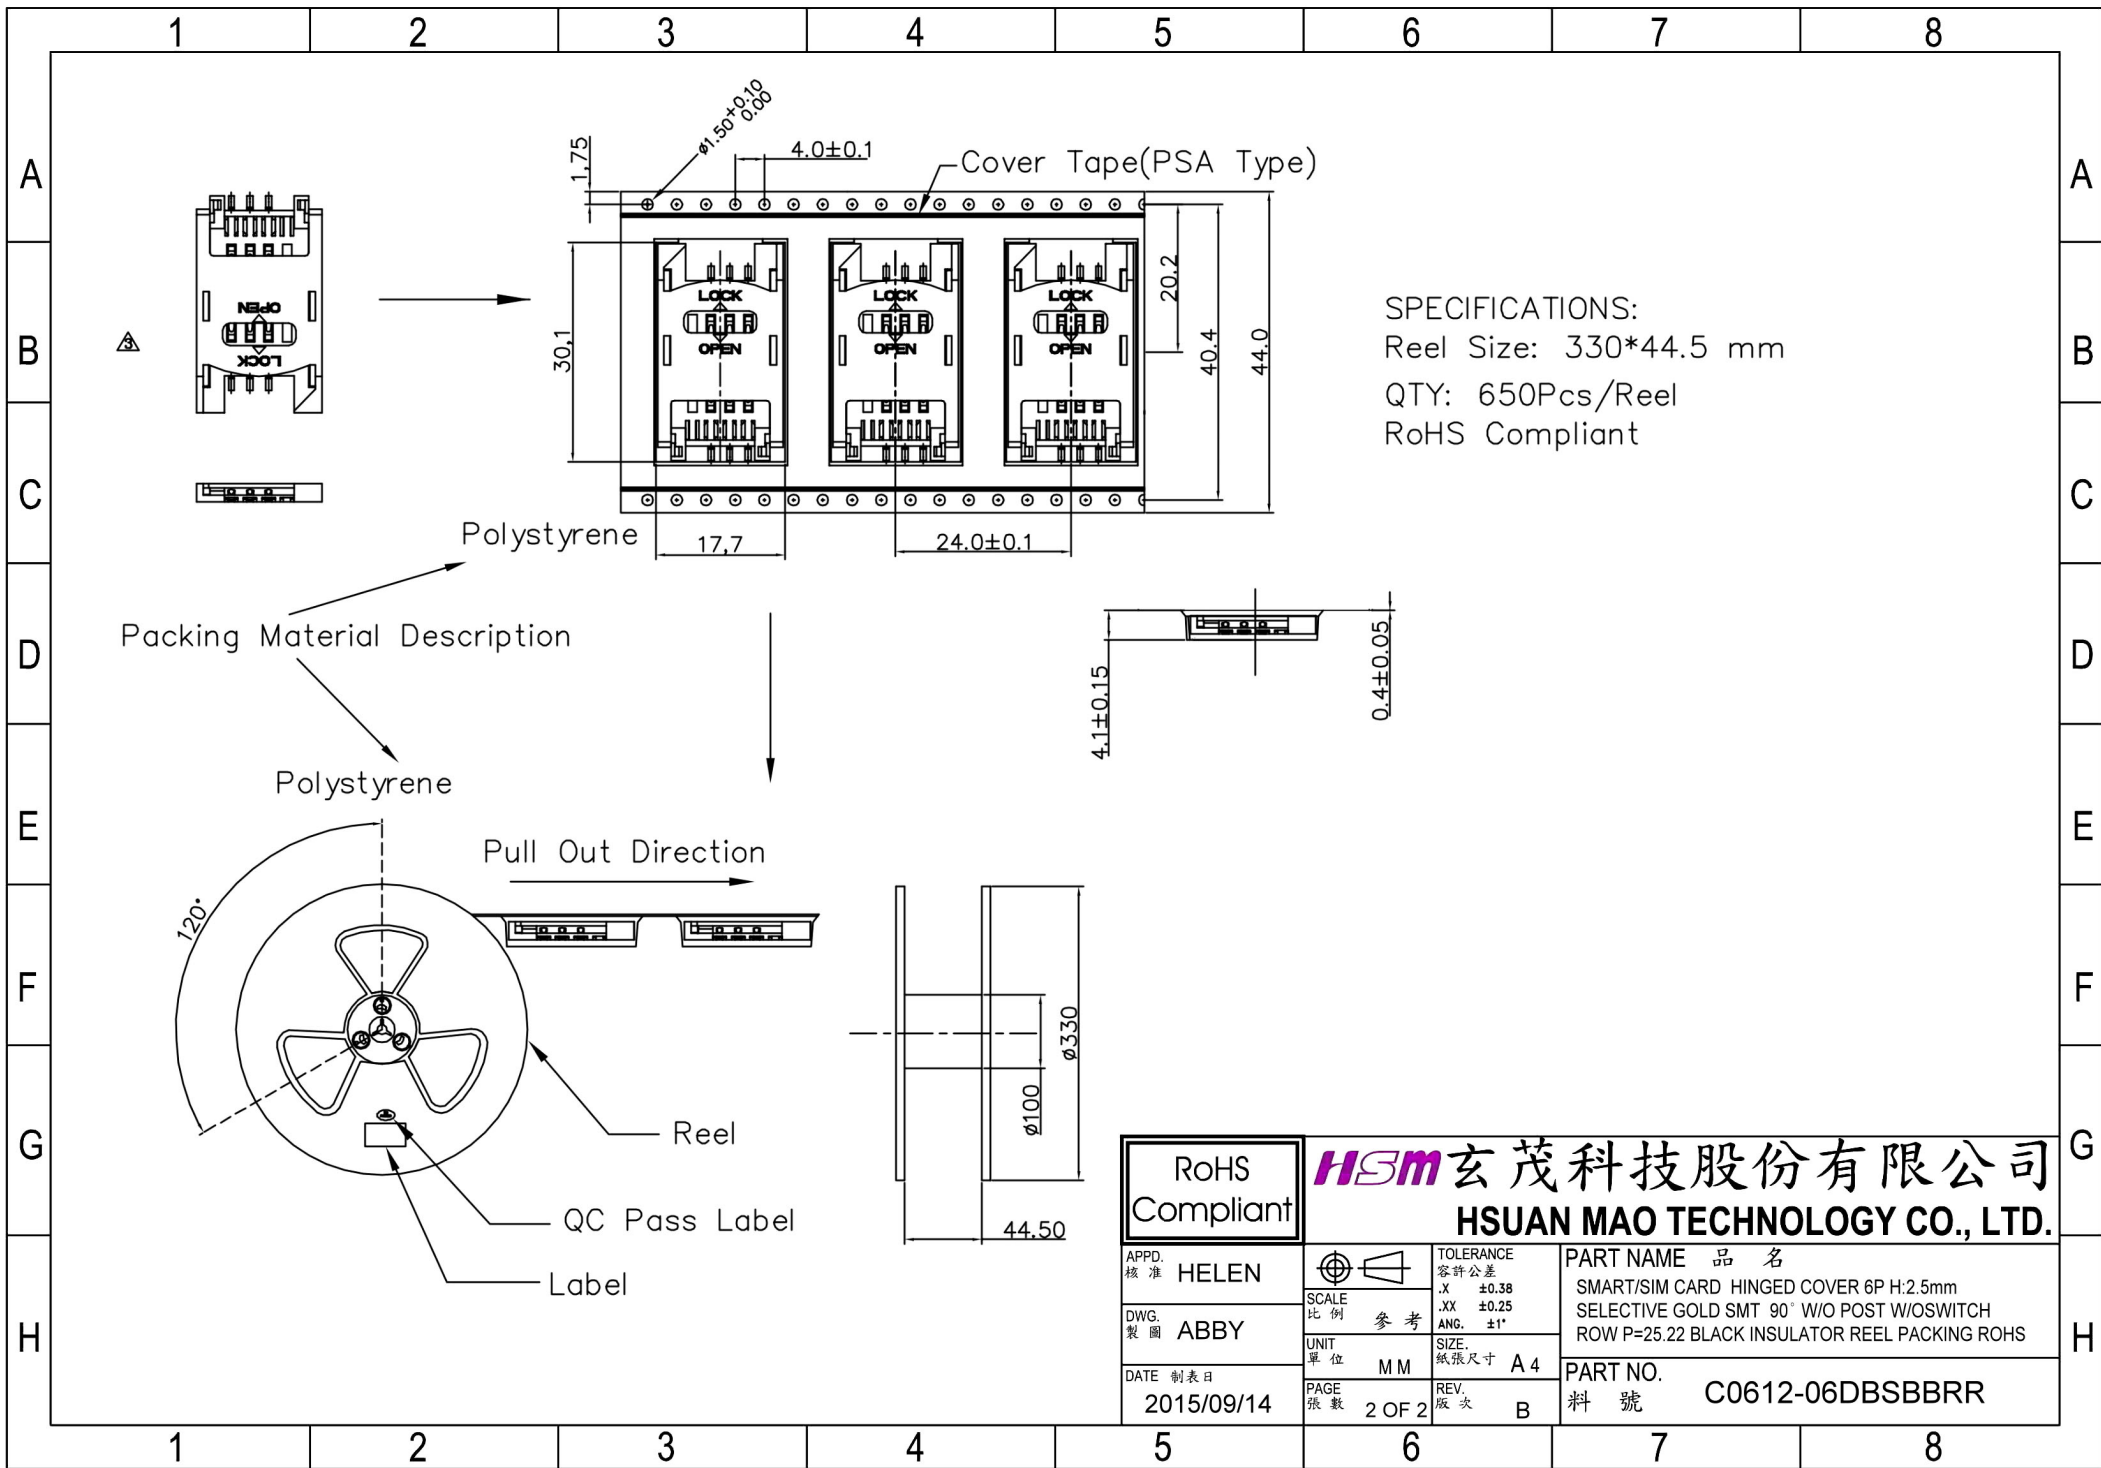

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 HELEN	 TOLERANCE 容許公差 .X ± 0.38 .XX ± 0.25 ANG. $\pm 1^\circ$	PART NAME 品名 SMART/SIM CARD HINGED COVER 6P H:2.5mm SELECTIVE GOLD SMT 90° W/O POST W/O SWITCH ROW P=25.22 BLACK INSULATOR REEL PACKING ROHS	
DWG. 製圖 ABBY	SCALE 比例 參考	UNIT 單位 MM	SIZE. 紙張尺寸 A4
DATE 製表日 2015/09/14	PAGE 張數 2 OF 2	REV. 版本 B	PART NO. 料號 C0612-06DBSBBRR