



## Schottky Rectifier Diodes

### FEATURES

- Small Surface Mount device
- Low forward voltage drop
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability


**SMB**


### MECHANICAL DATA

- Case: SMB(DO-214AA)
- Case Material: Molded Plastic. UL flammability
- Classification Rating: 94V-0
- Weight: 0.088 grams (approximate)
- Marking: 10BQ100

### MAXIMUM RATINGS AND CHARACTERISTICS( $T_A = 25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Repetitive peak reverse voltage	$V_{RRM}$	100	V
DC Reverse Voltage	$V_R$	100	V
RMS Reverse Voltage	$V_{RMS}$	70	V
Non-Repetitive Peak Forward Surge Current	$t = 5\mu\text{s sine}$	780	A
	$t = 10\text{ms sine}$	38	
Mean rectifying current	$I_F$	1	A
Repetitive Avalanche Current	$I_{AR}$	0.5	A
Non- Repetitive Avalanche Energy ( $I_{AS} = 1\text{A}, L = 4\text{mH}$ )	$E_{AS}$	1.0	mJ
Thermal Resistance From Junction To Ambient	$R_{\theta JA}$	80	$^\circ\text{C/W}$
Thermal Resistance From Junction To Lead	$R_{\theta JL}$	36	$^\circ\text{C/W}$
Junction and Storage Temperature	$T_J, T_{STG}$	-55 ~ +150	$^\circ\text{C}$

### ELECTRICAL CHARACTERISTICS ( $T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Min	Typ	Max	Unit	Conditions
Forward voltage (Note1)	$V_F$			0.78	V	$I_F = 1\text{A}, T_J = 25^\circ\text{C}$
				0.89		$I_F = 2\text{A}, T_J = 25^\circ\text{C}$
				0.62		$I_F = 1\text{A}, T_J = 125^\circ\text{C}$
				0.72		$I_F = 2\text{A}, T_J = 125^\circ\text{C}$
Reverse current (Note1)	$I_R$			0.5	mA	$V_R = 100\text{V}, T_J = 25^\circ\text{C}$
				1.0		$V_R = 100\text{V}, T_J = 125^\circ\text{C}$
Junction capacitance	$C_J$		42		pF	$V_R = 5\text{V}_{DC}, f = 100\text{kHz} \sim 1\text{MHz}$
Typical Series Inductance	$L_S$		2.0		nH	
Voltage Rate of Charge	$dv/dt$			10000	V/ $\mu\text{s}$	

Notes: 1. Pulse with  $<300 \mu\text{s}$ , Duty Cycle  $<2\%$

**Schottky Rectifier Diodes**

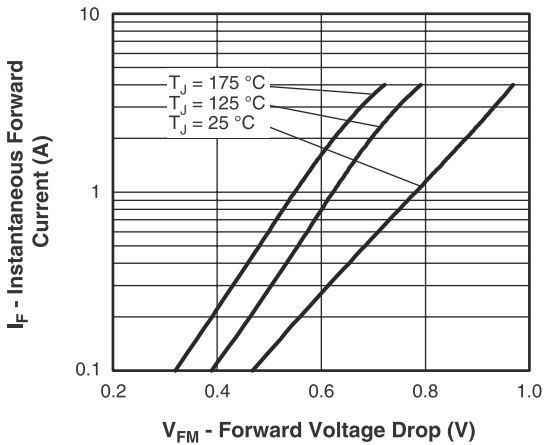


Fig. 1 - Maximum Forward Voltage Drop Characteristics

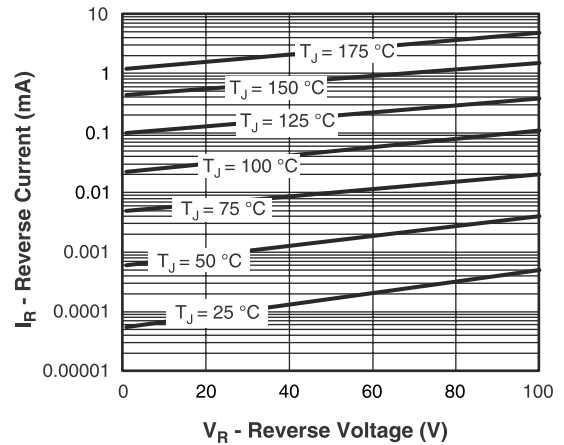


Fig. 2 - Typical Peak Reverse Current vs. Reverse Voltage

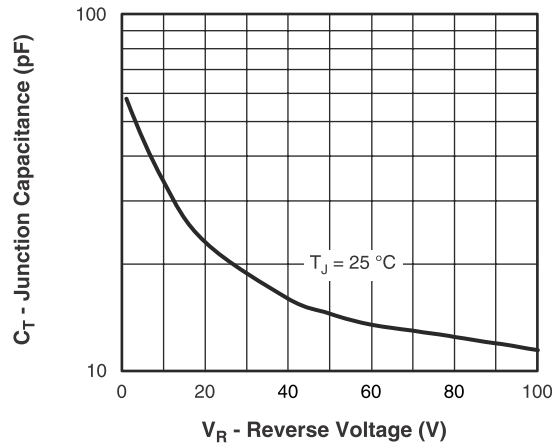


Fig. 3 - Typical Junction Capacitance vs. Reverse Voltage

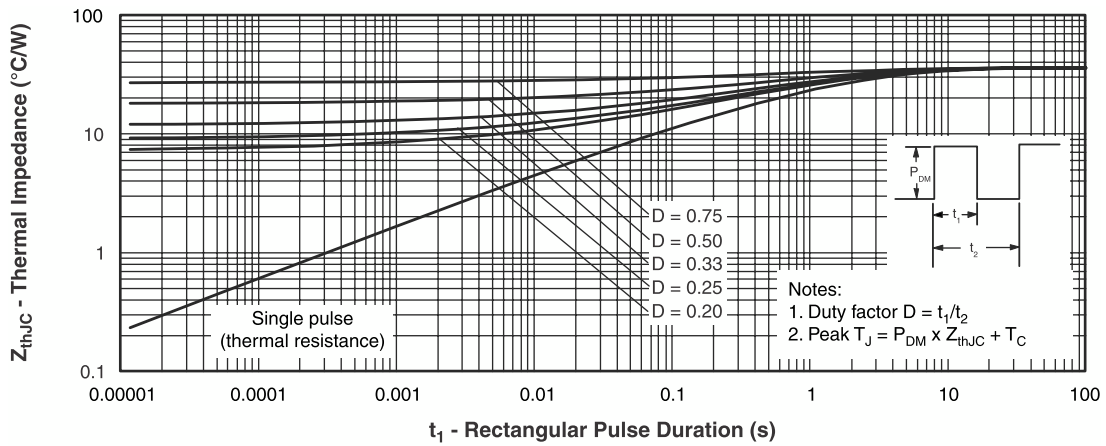


Fig. 4 - Maximum Thermal Impedance  $Z_{thJC}$  Characteristics (Per Leg)

**Schottky Rectifier Diodes**

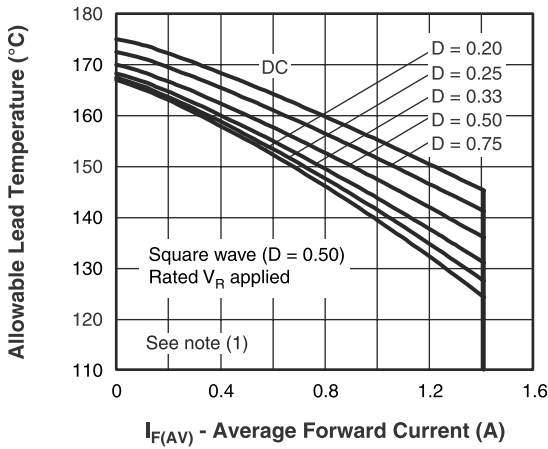


Fig. 5 - Maximum Average Forward Current vs. Allowable Lead Temperature

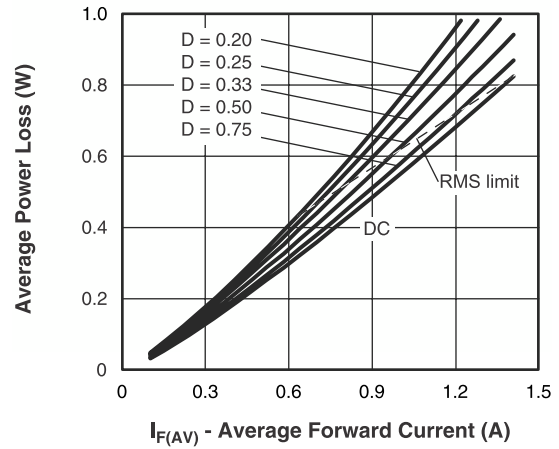


Fig. 6 - Maximum Average Forward Dissipation vs. Average Forward Current

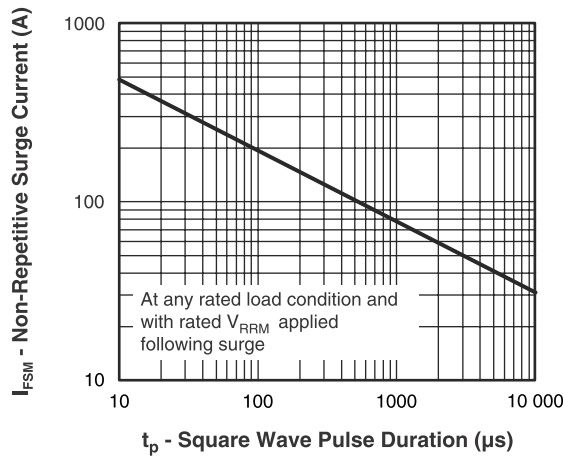



Fig. 7 - Maximum Peak Surge Forward Current vs. Pulse Duration

**Note**

- (1) Formula used:  $T_C = T_J - (Pd + Pd_{REV}) \times R_{thJC}$ ;  
 $Pd$  = Forward power loss =  $I_{F(AV)} \times V_{FM}$  at  $(I_{F(AV)}/D)$  (see fig. 6);  
 $Pd_{REV}$  = Inverse power loss =  $V_{R1} \times I_R (1 - D)$ ;  $I_R$  at  $V_{R1} = 80\%$  rated  $V_R$


## Schottky Rectifier Diodes

### SMB Package Outline Dimensions

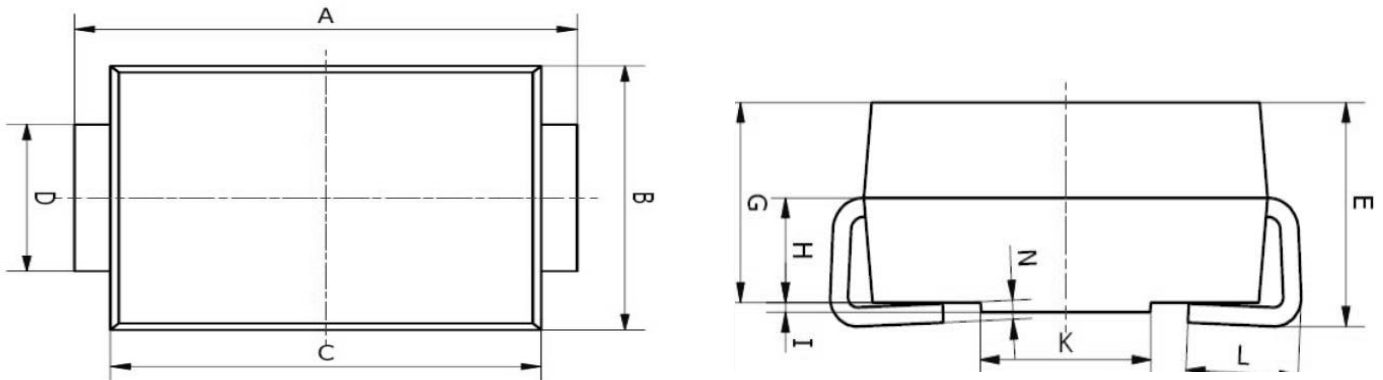

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	5.00	5.45	0.197	0.215
B	3.20	4.00	0.126	0.157
C	4.30	4.70	0.169	0.185
D	1.80	2.20	0.071	0.087
E	2.20	2.50	0.087	0.098
G	1.90	2.30	0.075	0.090
H	0.95	1.25	0.037	0.049
I	0.05	0.15	0.002	0.006
K	1.70	2.10	0.067	0.083
L	0.90	1.60	0.035	0.063
N	0.10	0.30	0.004	0.012

### SMB Suggested Pad Layout

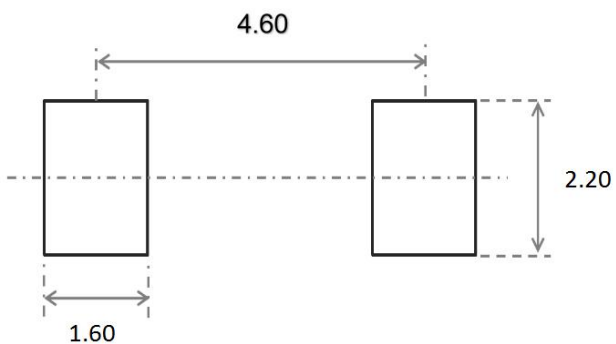


#### Note:

1. Controlling dimension: in millimeters
2. General tolerance:  $\pm 0.05\text{mm}$
3. The pad layout is for reference purposes only

## Schottky Rectifier Diodes


### SMB Tape and Reel

#### SMB Embossed Carrier Tape

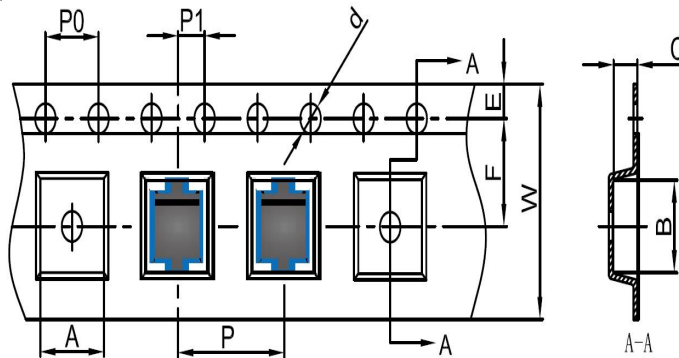


DIMENSIONS ARE IN MILLIMETER										
TYPE	A	B	C	d	E	F	P0	P	P1	W
SMB	4.10	5.50	2.58	Ø1.50	1.75	5.50	4.00	8.00	2.00	12.00
TOLERANCE	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1

#### SMB Tape Leader and Trailer

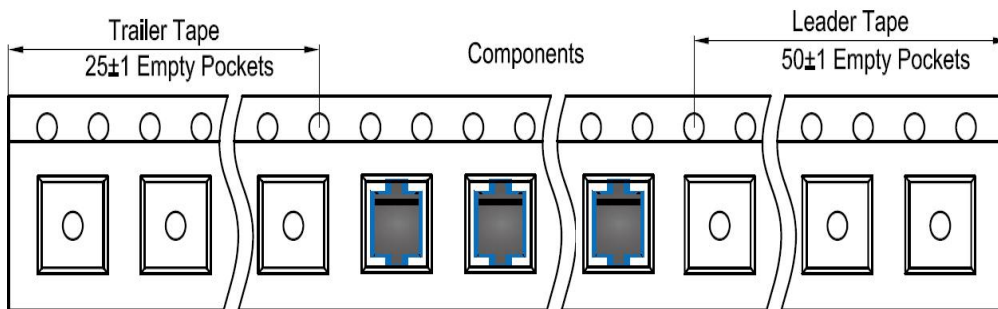

#### SMB Reel

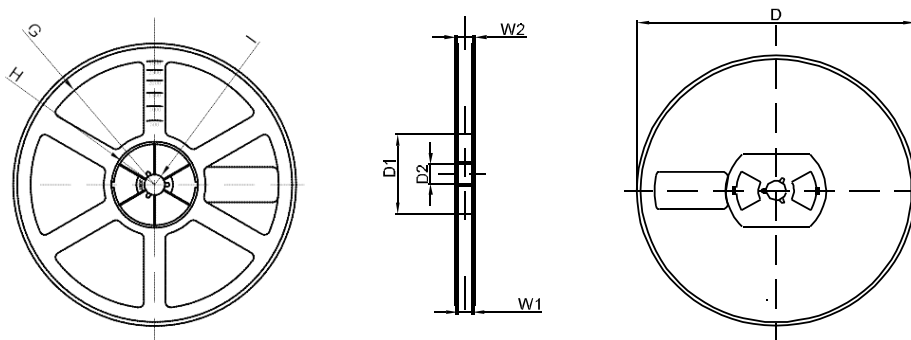

DIMENSIONS ARE IN MILLIMETER								
REEL OPTION	D	D1	D2	G	H	I	W1	W2
13" DIA	Ø330	75.0	13.00	R165	R37.50	R6.50	12.40	17.60
TOLERANCE	±2	±1	±1	±1	±1	±1	±1	±1