




SFM-1740




FEATURES:

- This item is designed for surface mounting applications
- The pin is plated with gold, which can meet the request of re-flow soldering process at 260°C for 30 seconds
- Small size

DIMENSIONS: (Unit: mm)

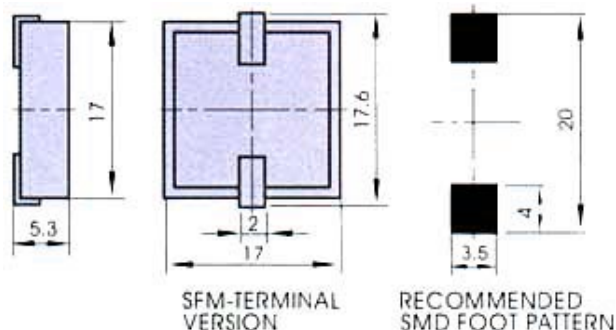

CHARACTERISTICS:

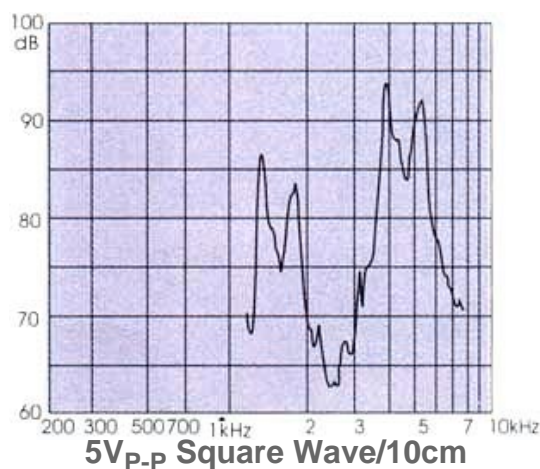

ELECTRICAL SPECIFICATIONS :

Model No.	SFM-1740
Min. Sound Pressure Level (dB)	80 /4.0kHz /5Vp-p Square Wave /10cm
Capacitance at 1000Hz (nF)	14 \pm 30%
Allowable Input Voltage	20Vp-p
Max. Consumption (mA)	2.5 /4.0kHz /5Vp-p Square Wave
Resonant Frequency (kHz)	4.0 \pm 0.3
Operating Temperature (°C)	-20 ~ +85
Case Material/Colour	PPS/Black
Weight (g)	2.2

PACKING INFORMATION:


Packing	5400 pcs per export carton
Carton Size	50.5 X 29 X 16 cm
G. Weight	19 kgs
N. Weight	11.9 kgs

PACKING INFORMATION:

TAPE TYPE INFORMATION:


The design for such tape packing was executed under standard IEC -286-3

The material of the tape is polystyrene in black color. detailed dimensions are as below :

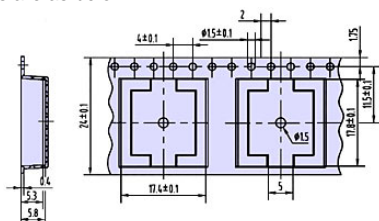

DIMENSIONS OF THE ROLLING PLATE:

The material of the rolling plate is in paper;
The dimensions of the rolling plate are as below:

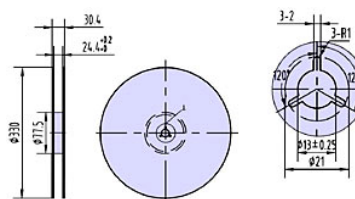

PACKING DIMENSIONS AND QUANTITY:

- The rolling plate is put into a 340X335X35mm inner packing box and is packed with 450 pcs of the transducer per plate.
- The dimension of the outer carton is 400X350X350mm containing 10 inner boxes with a total quantity of 4,500 pcs of the transducer.
- The total gross weight per carton is 15.4Kgs, while net weight is 9.9Kgs.