


REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

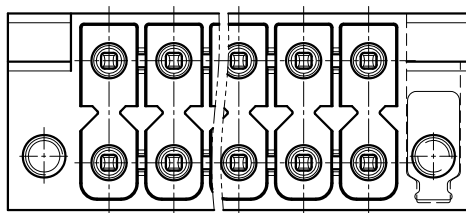

NOTES1:

UL Standard

1. Rated voltage/current : 300V / 8A
  2. Withstanding voltage : AC1600V/1Min.
- IEC Standard





1. Pollution degree	2	2	3
Overvoltage category	II	III	III
Rate impulse voltage(KV)	2.5KV	2.5KV	2.5KV
Rate voltage(V)	250V	160V	160V
Rate current(A)	8A		

NOTES2:


1. Dimension shall be interpreted per ASME Y14.5-2009
2. Pitch : 3.5mm, Poles : N=04~48P
3. Operating temperature : -40°C~+130°C
4. Undimensioned tolerances:

Pitch range in mm		Nominal dimension range in mm						Tolerances	
TO	Over	Over	Over	Over	Over	Over	0.1/10	≤	
6	6 TO 10	10 TO 24	30 TO 30	60 TO 60	100 TO 100	150 TO 150			
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2'	

5. RoHS Compliance

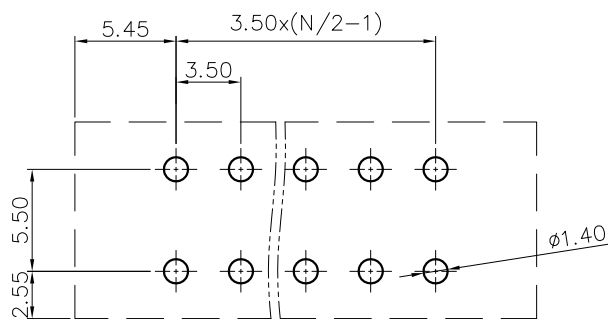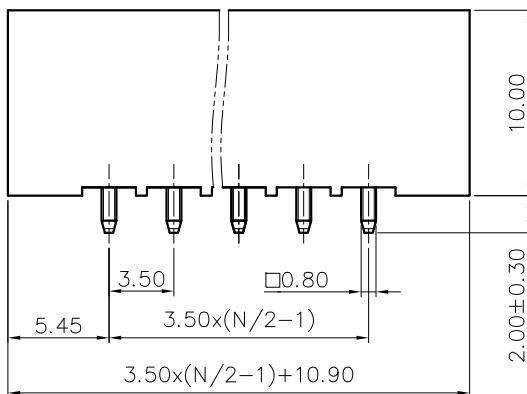

PCB LAYOUT

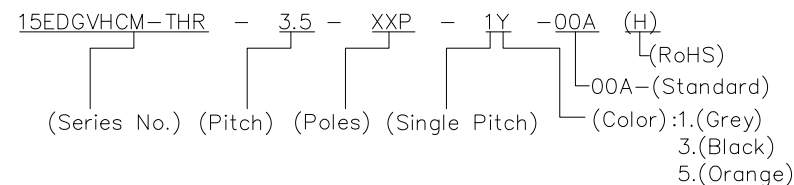

DETACHED LISTS	PART NO.:	/			
	APPD:	/			
	CHKD:	/			
	DRFT:	/			
		<p>THIRD ANGLE PROJECTION</p>		<p>MM (INCH)</p>	
		DO NOT SCALE DRAWING		REV	DO
		DRAWING NO.:		SHEET	1/1
		SCALE		1:1	

宁波高松电子有限公司  
NINGBO DEGSON ELECTRICAL CO., LTD

NAME:  
15EDGVHCM-THR-3.5-XXP-1Y-00A(H)

TITLE: CUSTOMER DRAWING

DRAWING NO.:

MM (INCH)

REV

SHEET

SCALE

DO

1/1

1:1