
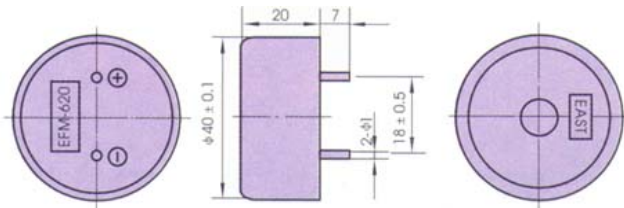


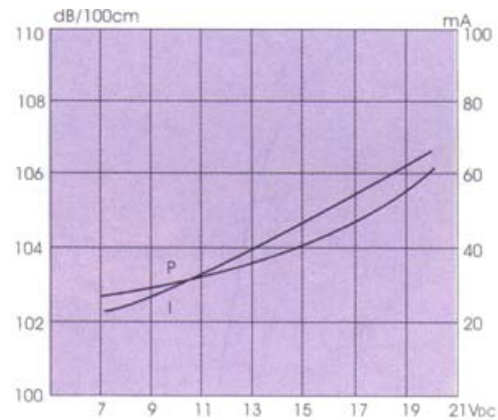

- **EFM-620 ( 620A )**

**FEATURES:**

- Loud output
- Low current consumption
- High efficiency and reliability
- PCB mounting
- Sealed type

**DIMENSIONS: (Unit: mm)****CHARACTERISTICS:****ELECTRICAL SPECIFICATIONS :**

| Model No.                            | EFM-620                                                       | EFM-620A                   |
|--------------------------------------|---------------------------------------------------------------|----------------------------|
| Min. Sound Pressure Level (dB)       | 100 /9V <sub>DC</sub> /100cm<br>90 /7.5V <sub>DC</sub> /300cm | 95 /3V <sub>DC</sub> /30cm |
| Rated Voltage (V <sub>DC</sub> )     | 9                                                             | 3                          |
| Operating Voltage (V <sub>DC</sub> ) | 7 ~ 20                                                        | 2 ~ 7                      |
| Max. Consumption (mA)                | 50 /9V <sub>DC</sub>                                          | 30 /3V <sub>DC</sub>       |
| Oscillating Frequency (kHz)          | 3.2 ± 0.5                                                     |                            |
| Operating Temperature (°C)           | -20 ~ +60                                                     |                            |
| Weight (g)                           | 12.5                                                          |                            |
| Case Material/Colour                 | ABS/Black                                                     |                            |

**PACKING INFORMATION :**

|               |                           |
|---------------|---------------------------|
| Packing :     | 600 pcs per export carton |
| Carton Size : | 47 X 30.5 X 35 cm         |
| G. Weight :   | 10 kgs                    |
| N. Weight :   | 7.5 kgs                   |