



未注公差/General tolerances (mm)												0.1/10 ±2'		
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400		>400 ~ 500	>500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	/	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	8	/	/
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm <sup>2</sup> )	28~12 / 0.2~2.5		
间距/Pitch(mm)/线数范围/Poles	6.0/N=01P		
剥线长度/Stripping length(mm)	8~9		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

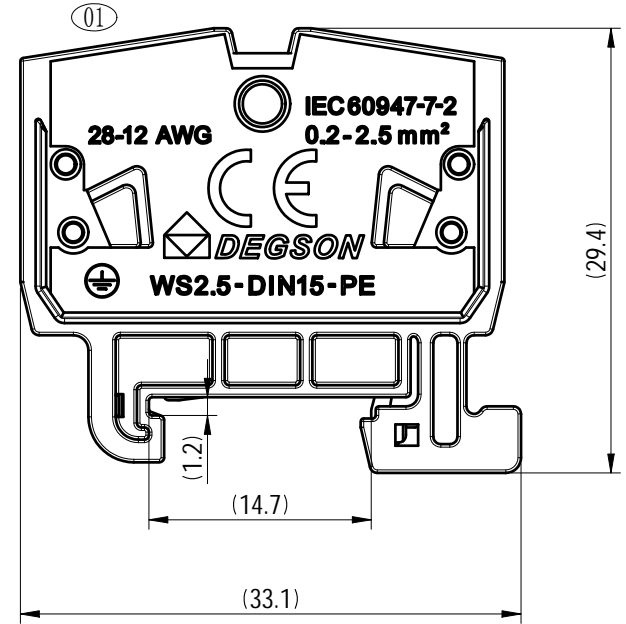

4	PE	Copper Alloy	Sn Plated
3	Current Carrier	Copper Alloy	Sn Plated
2	Spring	Stainless Steel	/
1	Housing	PA66	UL94 V-0
ITEM	NAME OF PART	MATERIAL	NOTES

DEGSON		MATERIAL: /	SURFACE/COLOR: /		
APPD: 彭敏	2023.04.24	MAT NO./REV: 1103000794-1 / 00	MAT STATUS: 批量		
CHKD: 高卫国	2023.04.23	NAME			
DRFT: 高卫国	2023.04.23	WS2.5-DIN15-PE-01P-1C-00A&Z(H)			
DRAWING NO. 图号		TYPE	DRAWING STATUS	SCALE	SHEET
A4		CUSTOMER DRAWING	已发布	2:1	1/1

REV	ECN	DESCRIPTION	DRFT	DATE
01	/	1.Remove the instructions for certification lettering;	高卫国	2023.04.23

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless authorized in writing by Degson. All rights reserved for patent, utility model or design registrations. 除特别说明外, 未经许可, 不得复制或传播。 除特别说明外, 未经许可, 不得复制或传播。 除特别说明外, 未经许可, 不得复制或传播。