


XCMT10H

| TYPE | UNIT | XCMT10H3205P |
|---------------------------|-----------|--------------|
| Min. Sound Output at 10cm | dB | 88 |
| Rated Voltage | V_{0-p} | 5 |
| Operating Voltage | V_{0-p} | 4~6 |
| Resonant Frequency | Hz | 3200 |
| Max. Current Consumption | mA | 80 |
| Coil Resistance | Ω | 40 ± 4 |
| Coil Impedance | Ω | 80 |
| Operating Temperature | ? | -20~+60 |
| Storage Temperature | ? | -30~+70 |
| Weight | g | 0.8 |

FREQUENCY RESPONSE:

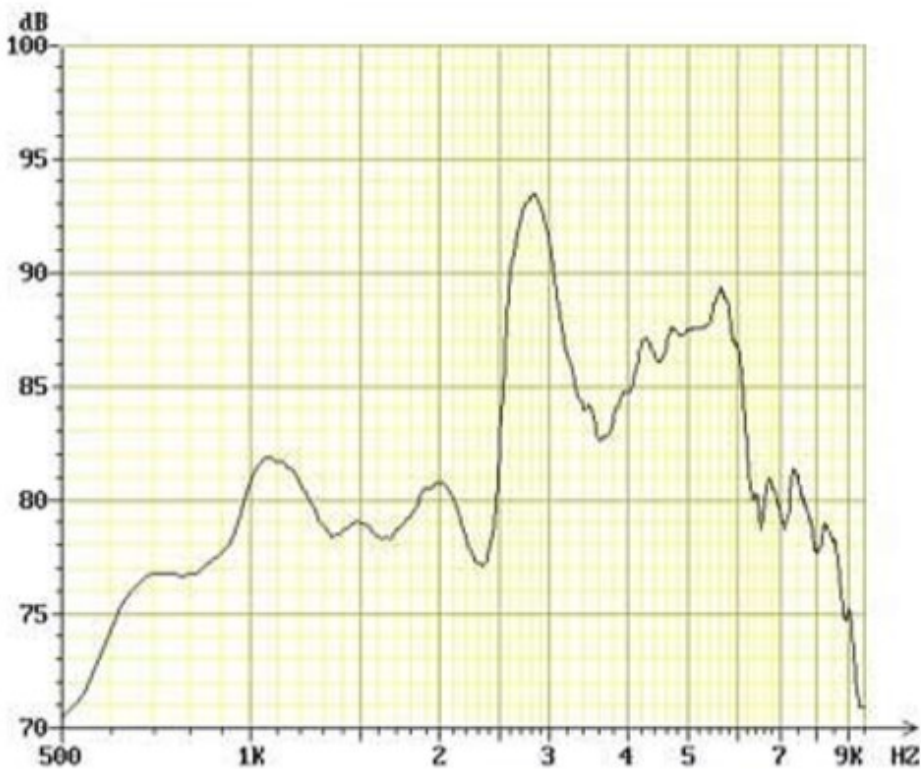

FEATURES:

Case: Noryl, Black

Pin: Tin-plated copper

DIMENSIONS: (Unit: mm)

