


The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of this information in any format or manner. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

1 2 3 4 5 6 7 8

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 04/09/15'	HZW 04/09/15'	LJC 04/09/15'
B	DRAWING UPDATE	JLZ 07/06/18'		

Dept Qty
 DC 1
 ED 1
 IE 1
 ISO 1
 PD 1
 R&D 1
 SD 1
 QA 1
 QC 1
 QF 1

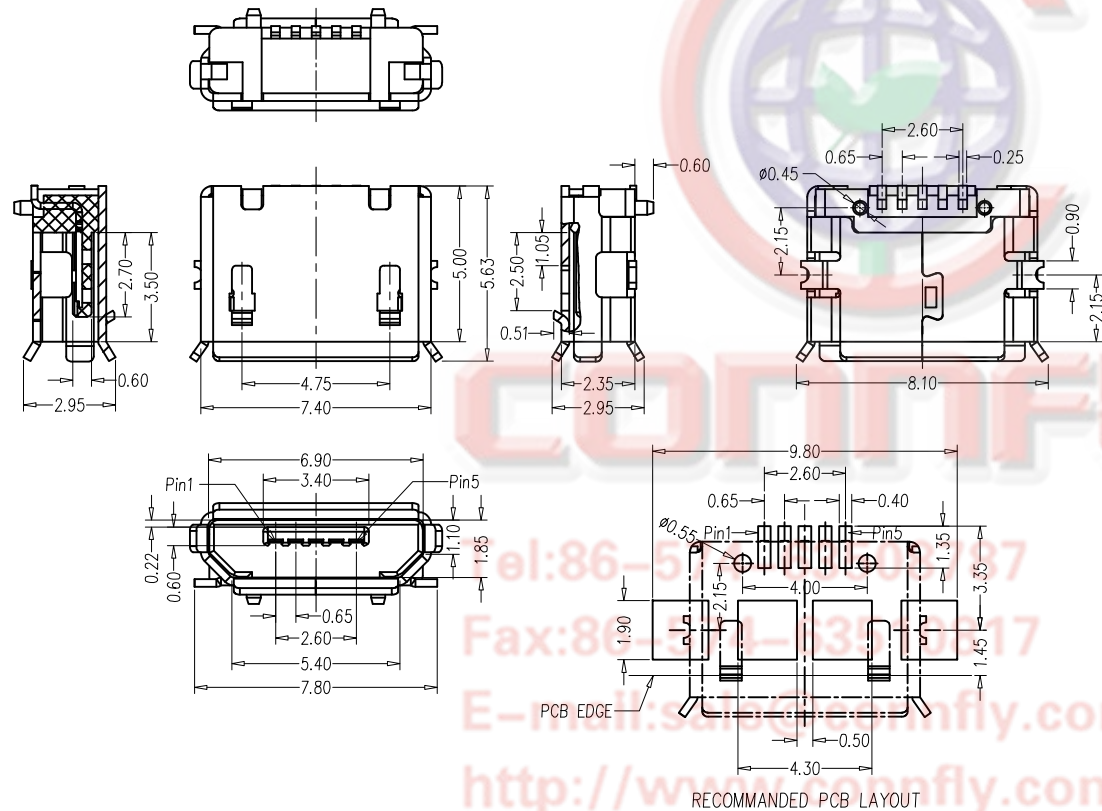


NOTES:

- 1.1 INSULATOR RESISTANCE: 100MΩ Min. AT 100V DC.
- 1.2 CURRENT RATING: 1.8A FOR PIN1 AND PIN5.
- 1.3 DIELECTRIC STRENGTH: AC 100V FOR 1 Minute.
- 1.4 HOUSING: THERMOPLASTIC (UL 94-0).
- 1.5 CONTACT: COPPER ALLOY
- 1.6 SHELL: COPPER ALLOY
- 1.7 PRODUCT NUMBER CODE:

DS1105-06 - X X X X X

- POST SUPPORT:
X: W/O Post
S: W/ Post
- PACKING TYPE:
R: Tape on reel
B: Tube
- CONTACT PLATED:
0: Selective Gold Flash
C: Selective Gold 3u"
3: Selective Gold 30u"
- SHELL PLATED:
6: Matt Tin
8: Full Gold
N: Full Nickel
- COLOR OF HOUSING:
B: Black
W: White

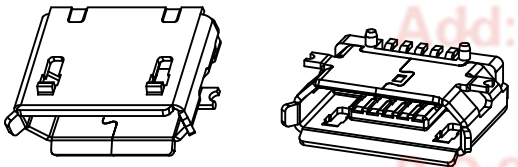

Tel: 86-574-891117
 Fax: 86-574-315333
 E-mail: sales@connely.com
 http://www.connely.com
 Add: East Industry Zone KuangYan
 Town Cixi Ningbo China
 P.C: 315333

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°
DRAWING TYPE		CUSTOMER	
SCALE		1:1	SHEET 1 OF 1
DRAWING NO.		C-DS1105-06-XXXXX-B	

PROJECTION	TITLE
UNITS	MICRO USB B TYPE FEMALE 5P SMT W/ POST TYPE
SHEET SIZE	SERIES DS1105-06 SERIES

晨翔电子有限公司
CONNELY CONNELY ELECTRONIC CO. LTD

1 2 3 4 5 6 7 8