




CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

more than you expect

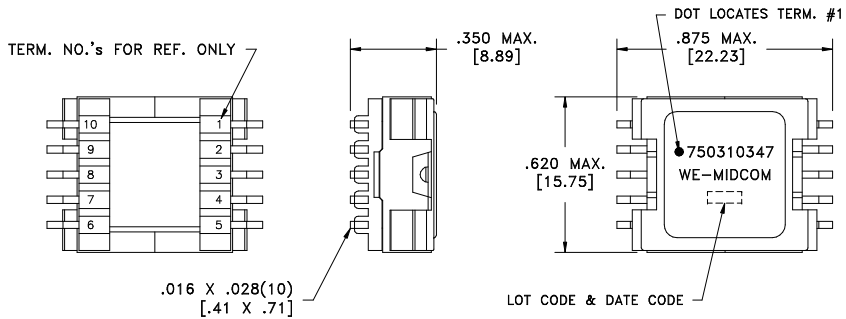

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	2-4 @20°C	0.35 ohms ±10%
D.C. RESISTANCE	6-10 @20°C	0.85 ohms ±10%
INDUCTANCE	2-4 10kHz, 100mVAC, Ls	200uH ±10%
INDUCTANCE	2-4 10kHz, 100mVAC, 1.50ADC, Ls	180uH min.
DIELECTRIC	2-10 500VDC, 1 second	-
URNS RATIO	(2-4):(10-6)	4:1, ±1%

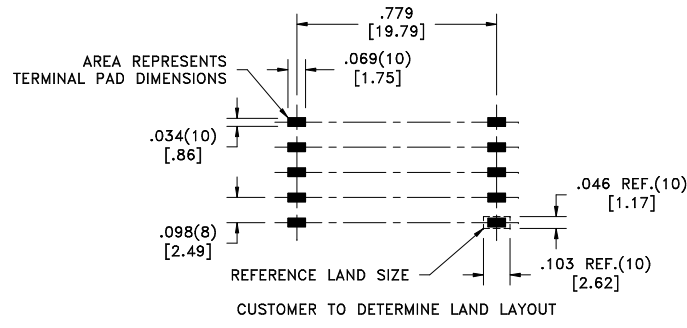

REV.	DATE	Packaging Specifications	CONVENTION PLACEMENT
		Method: Tape & Reel PKG-0197 www.midcom-inc.com	
6A	8/09	SEE REVISION SHEET FOR REVISION LEVEL	

Tolerances unless otherwise specified:
 Angles: ±1° Decimals: ±.005 [.13]
 Fractions: ±1/64 Footprint: ±.005 [.13]

This drawing is dual dimensioned. Dimensions in brackets are in millimeters.

DRAWING TITLE
TRANSFORMER

eiSos p/n: 750310347

PART NO.
750310347

SPECIFICATION SHEET 1 OF 1