

Material:

- 1.Body: PPS UL 94V-0 Rated, Color:Black;
- 2.Cover: LCP UL 94V-0 Rated, Color:Black;
- 3.Contact: Phosphor Bronze;
- 4.Contact Plating: Gold Plating Over Nickel on Contact Area, Tin Plating on Solder Tail.

Specification:

- 1.Current Rating: 0.5 AMP. Max.;
- 2.Dielectric Withstanding Voltage: 500V AC R.M.S For One Minute;
- 3.Insulation Resistance: 1000 MΩ Min. AT 500V AC;
- 4.Contact Resistance: 30 mΩ Max.;
- 5.Operating Temperature: -25°C to +85°C;
- 6.Durability: 5000 Cycles.
- 7.Processing Temp: 240°C for 30~60 Seconds Max

115B-B A A Q-R
1 2 3 4 5

- 1.Type B:8 Pin
- 2.Contact Plating A:Gold Flash
- 3.Stand Off A:0mm
- 4.Peg 0:w/peg
- 5.RoHS

UNLESS OTHERWISE SPECIFIED TOLERANCE	
ANG.	±5°
0.	±
.0	±0.25
.00	±0.20

SCALE: AS SHOWN UNIT: mm

DRAWN Willis 2009/06/19

CHECKED / /

APPROVED / /

SIZE A4 REV.



ATTEND TECHNOLOGY INC.



www.attend.com.tw

DRAWN NAME: SIM Card Socket Hinge type

PRODUCT NO. 115B-BAA0-R

FILE NAME: 115B-BAA0-R_B_1


REV.	DESCRIPTION	DATE
1		
2		
3		

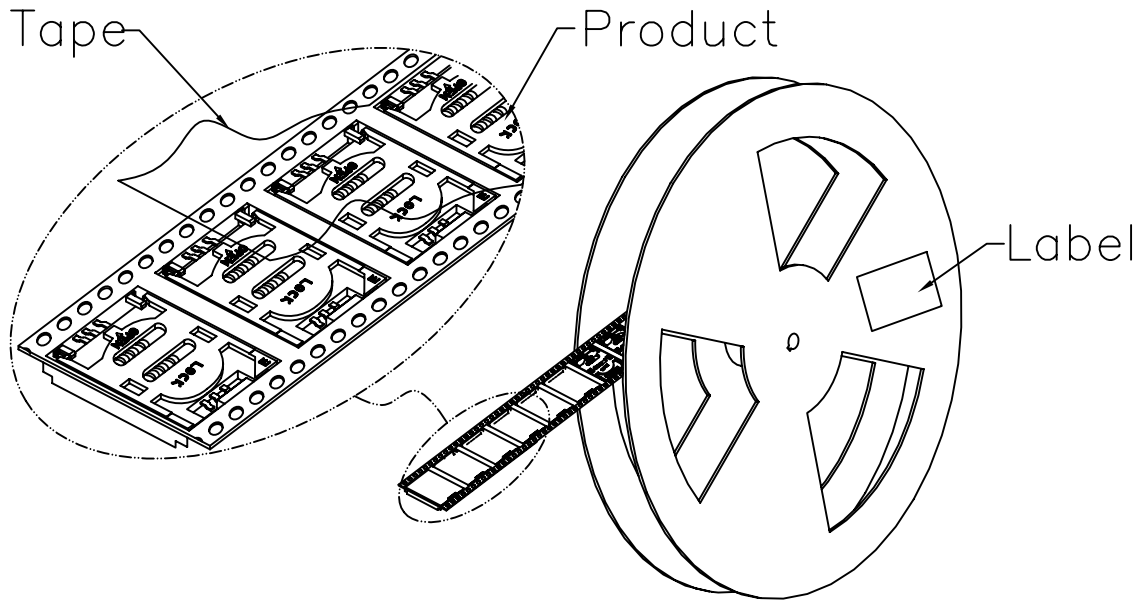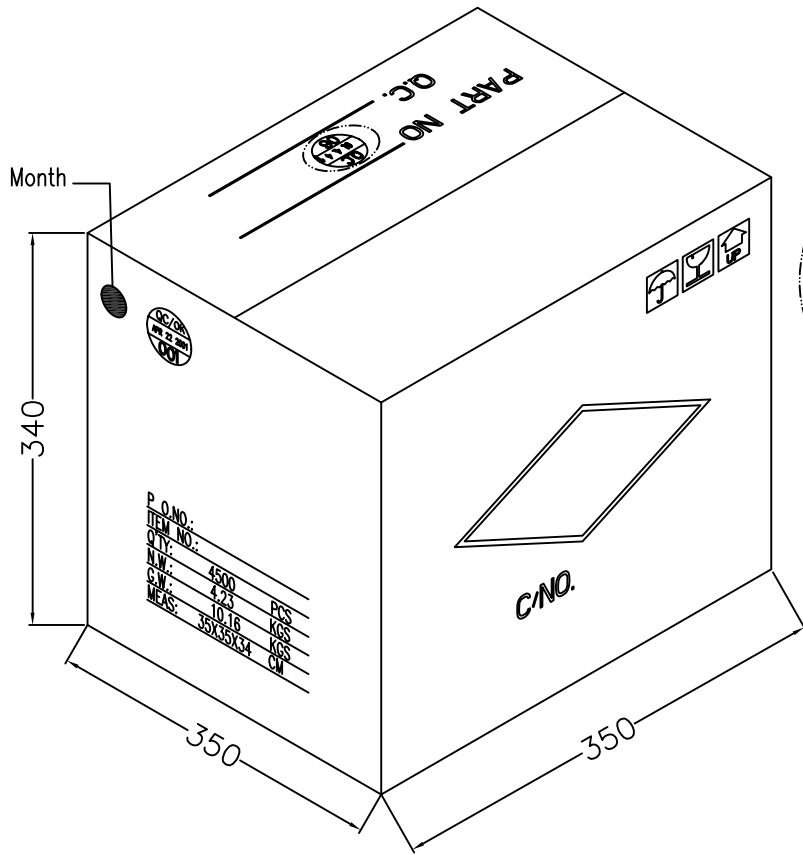

PACKING DETAILS

P/O.NO.:
 ITEM NO.:
 Q'TY: 3900 PCS
 N.W.: 4.23 KGS
 G.W.: 10.16 KGS
 MEAS: 35X35X34 CM

650PCS/Reel, 1Reel/1PE Bag
 6Reel/Tarton
 3900PCS/Tarton.

UNLESS OTHERWISE SPECIFIED TOLERANCE		 ATTEND TECHNOLOGY INC. www.attend.com.tw		
ANG.	±5°			
0.	±	SCALE: AS SHOWN UNIT: mm DRAWN Willis 2007/3/20 CHECKED / / APPROVED / / FILE NAME: 115B-XAAX-R-R_D_1		
.0	±0.25			
.00	±0.20			
REV.	DESCRIPTION	DATE	SIZE A4	REV.

REV.	DESCRIPTION	DATE
1		
2		
3		
4		
5		
6		
7		