


Technical Parameter

- Spacing between positions 5.0/5.08mm
- UL rating, 24 to 12 AWG, 12 amps, 300 volts
- UL94V0 housings, completely plated metal parts
- RoHS compliant
- Housing and header polarized
- Keying plugs available for plugs and headers (same as above)

P.C.B.LAYOUT

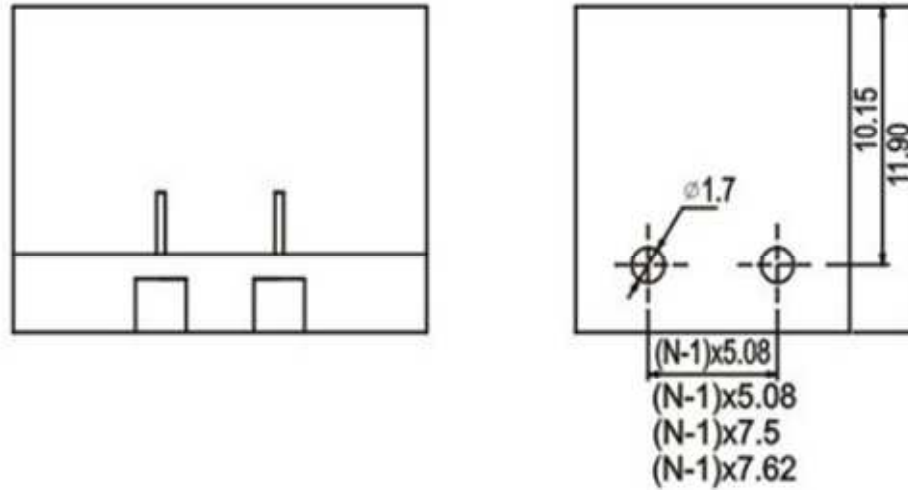

HOW TO ORDER

