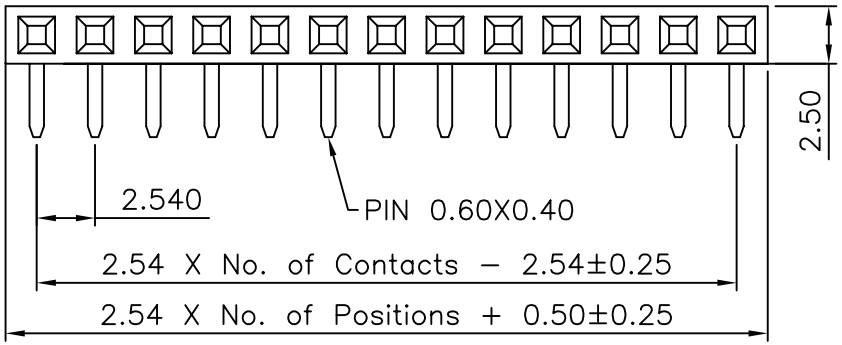



Specifications

Current Rating: 3Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 600V AC/DC
Contact Resistance: 20mΩ Max.
Operating Temperature:−40°C to +105°C

Materials

Contact Material: Phosphor Bronze
Insulation Material: Polyester, UL 94V−0

02 注: 02~24PIN塑膠材質用P.B.T料生產,
25~40PIN塑膠材質用PA6T+20%料生產.

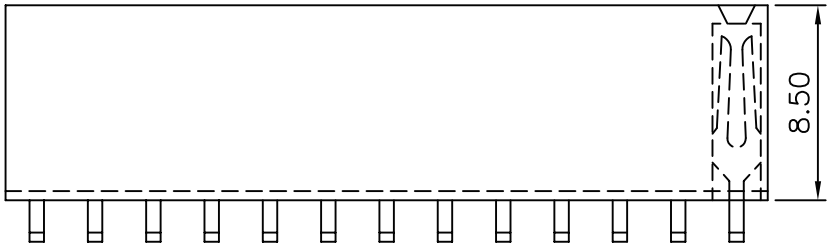

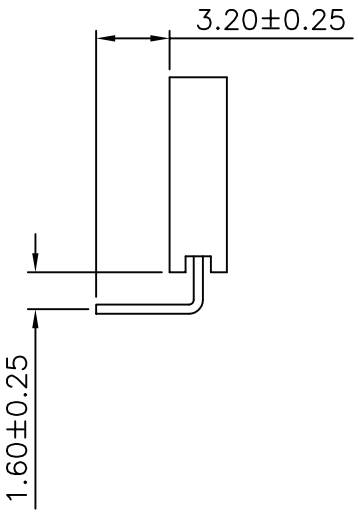

TOLERANCES ARE

X. ±
.X ± 0,38
.XX ± 0,25
.XXX ± 0,13
ANG ±

Recommended P.C.Board

Hole Layout



RoHS Compliant

DESCRIPTION: 2.54 FEMALE HEADER SINGLE ROW R/A TYPE BASE 8.50H