



Note: This datasheet may be out of date

Please download the latest datasheet of NCP21XQ102J03RA from the official website of Murata Manufacturing

https://www.murata.com/en-us/products/productdetail?partno=NCP21XQ102J03RA

NCP21XQ102J03RA












Appearance & Shape










- 1. Excellent solderability and high stability in environment
- 2. Excellent long time aging stability
- 3. High accuracy in resistance and B-constant
- 4. Flow / Reflow soldering possible
- 5. Same B-Constant in the same resistance in the three sizes (0805 size / 0603 size / 0402 size)

Easy to use smaller size in the circuits

- 6. Lead is not contained in the product.
- 7. NCP series are recognized by UL/cUL (UL1434, File No.E137188).



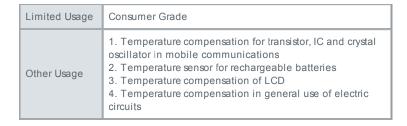



Packaging Information

| Packaging | Specifications | Minimum Order Quantity |
|-----------|---------------------|---------------------------|
| RA | 180mm Embossed Tape | 4000 |

1 of 3

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering



URL: https://www.murata.com/

Last updated : 2018/08/23



Note: This datasheet may be out of date

 $\underline{ Please \ download \ the \ latest \ data sheet \ of \ NCP21XQ102J03RA \ from \ the \ official \ website \ of \ Murata \ Manufacturing } }$

$\underline{\text{Co., Ltd.}} \\ \text{https://www.murata.com/en-us/products/productdetail?partno=NCP21XQ102J03RA} \\$

NCP21XQ102J03RA



| Resistance (25°C) | 1kΩ |
|---------------------------------------|----------------|
| Resistance Value Tolerance (at 25°C) | ±5% |
| B-Constant (25/50°C) | 3650K |
| B-Constant (25/50°C) Tolerance | ±3% |
| B-Constant(25/80°C)(Reference Value) | 3688K |
| B-Constant(25/85°C)(Reference Value) | 3693K |
| B-Constant(25/100°C)(Reference Value) | 3706K |
| Max. Voltage | 5V |
| Maximum Operating Current (25°C) | 0.447mA |
| Typical Dissipation Constant (25°C) | 2mW/℃ |
| Operating Temperature Range | -40°C to 125°C |
| Size Code (in mm) | 2.0x1.25mm |
| Size Code (in inch) | 0.8x0.5inch |
| Shape | SMD |
| Mass | 0.0094g |

2 of 3

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering. 2.This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering





URL: https://www.murata.com/

https://www.murata.com/en-us/products/productdetail?partno=NCP21XQ102J03RA

NCP21XQ102J03RA



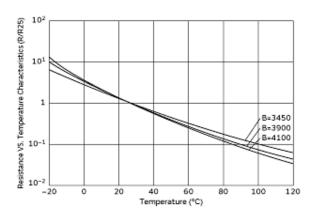

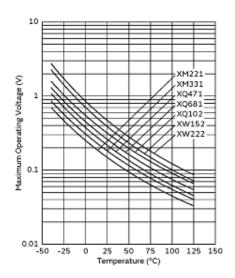

Resistance-Temperature Characteristics

Maximum Operating Voltage Reduction Characteristics

3 of 3

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering. 2.This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering

