
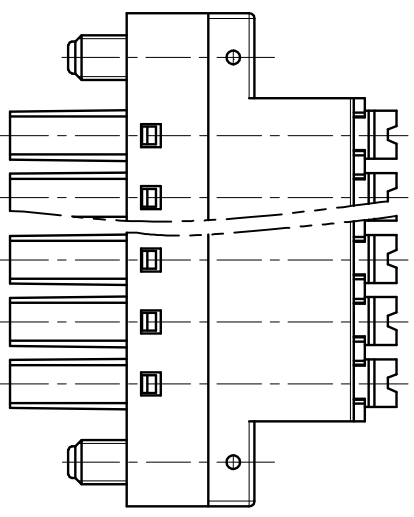
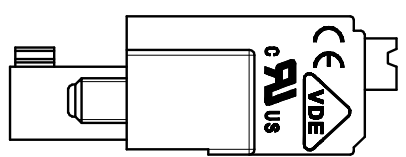
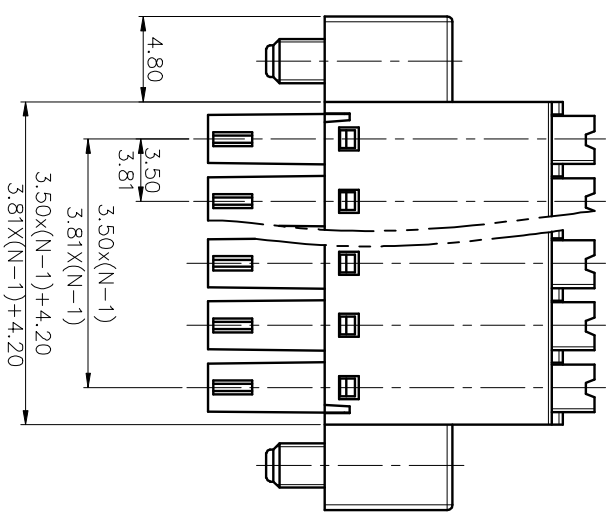
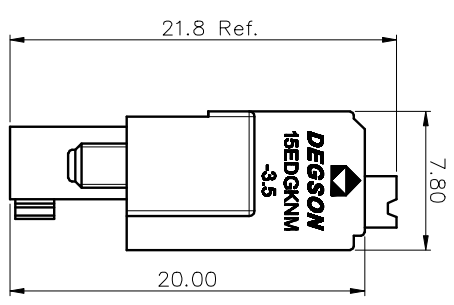


REVISION RECORD			
REV	ECH	DESCRIPTION	DATE

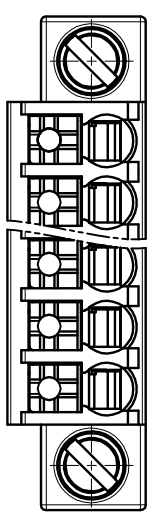

15EDGKNM - 3.5/3.81 - XXP - 1Y - 1000A (H)
 (Series No.) (Pitch) (Poles) (Single Pitch) (Color): 1.(Grey)
 2.(Blue)
 3.(Black)
 4.(Green)
 5.(Orange)
 6.(Red)
 7.(Transparent)
 8.(Yellow)
 9.(White)

NOTES1:

- UL Standard
- 1. Rated voltage/current : 300V / 8A
- 2. Withstanding voltage : AC1600V/1Min.
- 3. Wire range : 28~16AWG

Pollution degree	2
Overvoltage category	II
Rate impulse voltage(KV)	2.5KV
Rate voltage(V)	250V
Rate current(A)	8A

NOTES2:

- 1. Dimension shall be interpreted per ASME Y14.5-2009
- 2. Pitch : 3.50/3.81mm, Poles : N=02~20P
- 3. Stripping length : 10mm
- 4. Operating temperature: -40°C~+105°C
- 5. Undimensioned tolerances:

Pitch range in mm	Nominal dimension	range	mm	in mm	mm	in mm	mm	in mm	mm	in mm	mm	in mm
6	10	TO	10	TO	30	TO	60	TO	100	TO	150	TO
6	10	TO	24	TO	30	TO	60	TO	100	TO	150	TO
F0.15	F0.20	F0.30	F0.30	F0.30	F0.50	F0.50	F0.70	F1.00	F1.30	F1.30	F1.30	F1.30
												±.2

- 2. Wire range : 0.2~1.0mm²

6. RoHS Compliance

PART NO.:		/	
APPD:	/	NAME:	DEGSON 宁波德森电子有限公司
CHD:	/	NAME:	NINGBO DEGSON ELECTRICAL CO., LTD
DRAFT:	/	TITLE:	CUSTOMER DRAWING
THIRD ANGLE PROJECTION		DRAWING NO.:	/
		REV	DO
		SHEET	1/1
		SCALE	1:1