
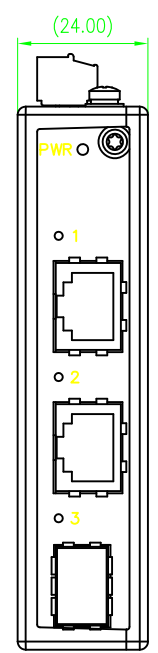


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility, model or designs registrations. 除非给予明确授权，否则禁止转让、复制、利用、交流本文件内容。侵犯者将承担赔偿责任。本公司保留所有权利和专利。


尺寸公差(mm)					0.05/10 ±T
0 ~ 30	>30 ~ 60	>60 ~ 100	>100 ~ 150	>150	
±0.20	±0.30	±0.50	±0.70	±1.00	

端口数	3口, 千兆1光2电
防护等级	IP30
工作温度	-40~+75℃
电源	支持24 VAC 50/60Hz or 12/24/48 VDC0.33A(max.) Class 2
安装方式	DIN35mm
印字为激光打标, 印字内容清晰、无断线等/Printing for laser marking,printing content is clear ,no broken line,ect	

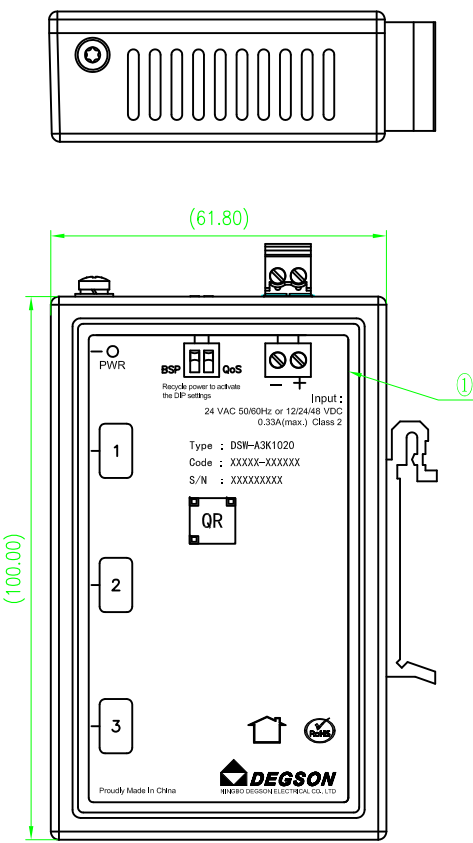


DSW-A3K1020

产品序列号
随产品出厂自动生成:

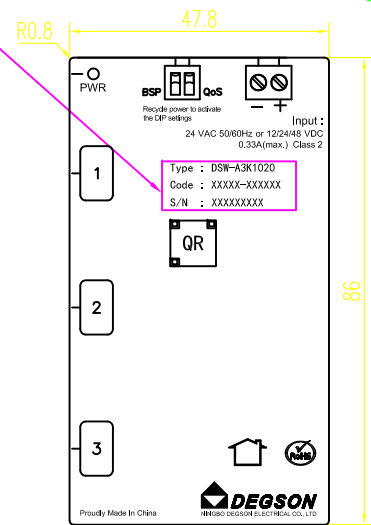

哑银标签
scale: 1:1

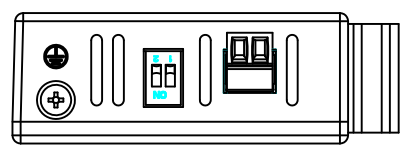

MATERIAL:	/	SURFACE:	/
MAT.NO.:		宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
STATUS:	/		
APPD:		Description: DSW-A3KXXXX	
CHKD:			
DRFT: luop DP 2021.09.27		DRAWING NO.: 200017130	REV 00
SIZE: A4	mm (inch)	TYPE: PRODUCT DRAWING	SCALE: 1:1 SHEET 1/1

REV	ECN	DESCRIPTION	DRFT	DATE	SIZE	TYPE	SCALE	SHEET
					A4	PRODUCT DRAWING	1:1	1/1