

Data sheet

Commercial Art.No.: 81.020.0025.0

Timer relay flare TIME FM6-2 230V

flare TIME FM6-2 230V, Multifunction-Timer, 6 Functions, Time ranges 0:01-99:59 hours/0:01-99:59 minutes, 2 Change-over, Front panel mounting, 90-265 V AC/DC, W x H x D: 72 x 72 x 100 mm



Commercial Art.No.	81.020.0025.0
EAN	4049088384844
Order Unit	1

Technical data

General

Connection type	Screw-/tension clamp connection
Plug-in socket	No
Remote operation possible	No
Only for remote control	No
Function flashing, starting with pause, fixed time	yes
Function flashing, starting with pulse, fixed time	yes
Clock function, starting with pause, variable	yes
Clock function, starting with pulse, variable	yes
Number of relay outputs, undelayed, change-over contacts	0
Relay outputs, delayed/undelayed selectable	No
Number of relay outputs, undelayed, normally closed	0
Number of relay outputs, undelayed, normally open	0
Number of relay outputs, delayed, change-over contacts	0
Number of relay outputs, delayed, normally open	0
Number of relay outputs, delayed, change-over contacts	2
Semiconductor output	No
Function delay-on energization	yes
Function floating contact on energization	yes
Function star-delta	No
Function delay on de-energization	yes
Function floating contact on de-energization	yes
Function pulse shaping	yes

Technical data

Type of excitation	AC
With auxiliary voltage	No
Min. rated AC voltage for controls, 50 Hz	90 V

Max. rated AC voltage for controls, 50 Hz	265 V
Min. rated AC voltage for controls, 60 Hz	90 kV
Max. rated AC voltage for controls, 60 Hz	265 kV
Min. rated DC voltage for controls	90 V
Max. rated DC voltage for controls	265 V
Nominal voltage AC 50 Hz	230 V
Nominal voltage AC 60 Hz	230 V
Min. nominal voltage DC	90 V
Max. nominal voltage DC	265 V
Min. rated frequency	50 Hz
Max. rated frequency	60 Hz
Min. adjustable time	1 sec
Max. adjustable time	100 h

Dimensions




Depth	88.5 mm
Width	72 mm
Height	72 mm

Classification

ECLASS 11	
ECLASS 8.1	27371605
ETIM 7.0	EC001439
ETIM 6.0	EC001439
ETIM 5.0	EC001439

Product compliance

REACH-SVHC conformity status	Compliant
------------------------------	-----------

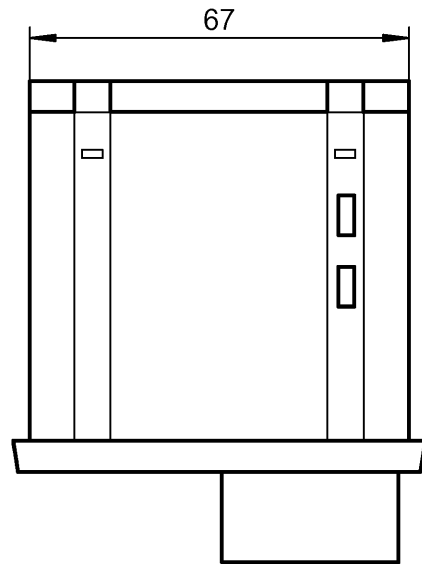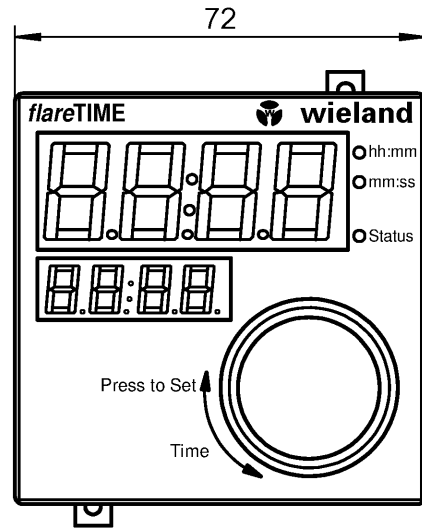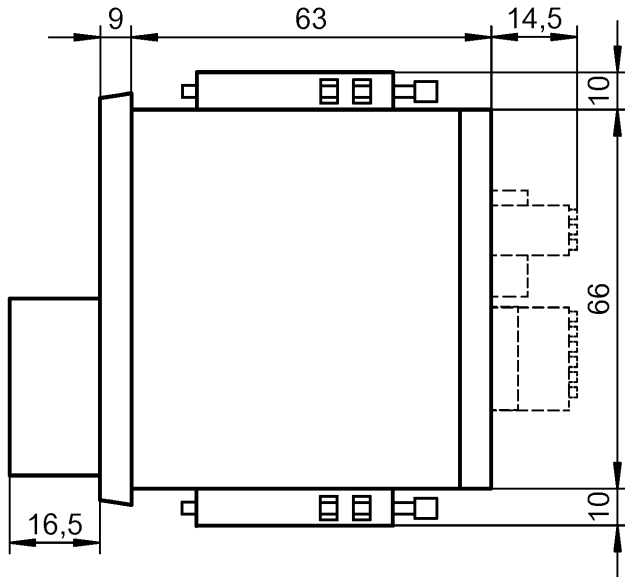



Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung
 seines Inhalts sind verboten, soweit nicht ausdrücklich gestattet.
 The reproduction, distribution and utilization of this document as well as the
 communication of its contents to others without express authorization is prohibited.

Qu - PEE 12/92

Weitere Angaben siehe KATALOG oder eKatalog.
Additional data see CATALOG or eCatalog.

www.wieland-electric.com
eshop.wieland-electric.com

ja/yes Stoffverbots- und Deklarationsliste nach WN 5020.010 ist einzuhalten.
Conformity with Wieland document WN 5020.010 e (list of prohibited / declarable hazardous substances) to be declared!

Freitoleranz nach General tolerance		CAD-Zeichnung, keine manuellen Änderungen CAD-Drawing, no manual modifications allowed			1. Verwendung: First Use:		Blatt: Sheet:		
 Maßstab/Scale		Werkstoff/ Material		2017	Tag/ Date	Name		Zeichnung Nr./ Drawing No.	
				gezeichnet drawn	01.02.	Kötzner		81.020.0025.0 01K	
				geprüft checked					
		Datei/ File: 044221_01K.DCD		Ersatz für/ Replacement for:					
		 wieland www.wieland-electric.com		Type		Benennung/ Title		Teilespezifikation / Component specification	
Index				Datum/ Blatt Date/ Sheet				Zeitrelais/Time Relay flare TIME FM6-2 230V	
Änderung/ Revision									

A
1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
M1
M2
M3
L
G
i
11.1
12.1
1.1