
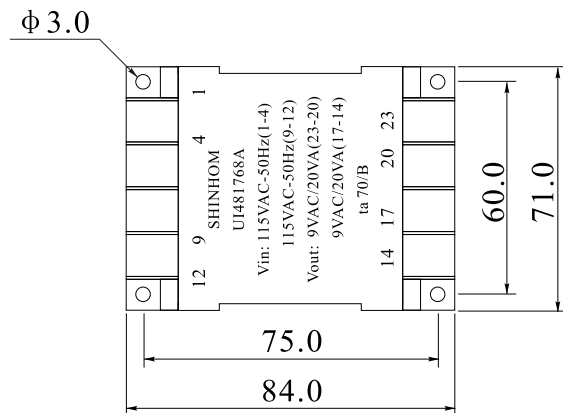
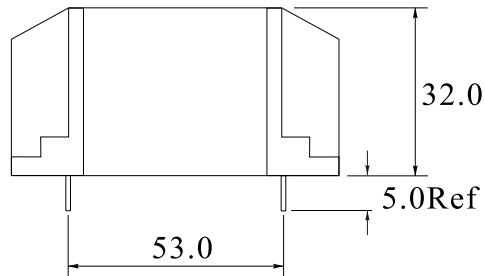


Rev.	Description	Date
A0	New release	2023.09.13

1. PHYSICAL CHARACTERISTICS (mm)

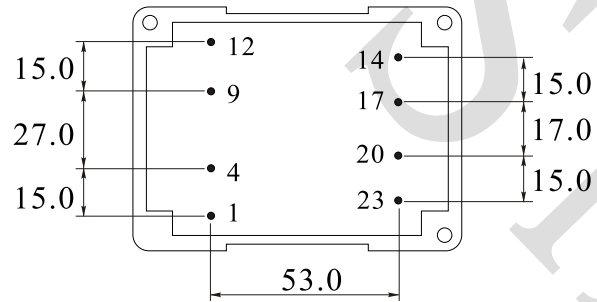


Marking

12	9	4	1
SHINHOM			
UI481768A			
Vin: 115VAC-50Hz(1-4)			
115VAC-50Hz(9-12)			
Vout: 9VAC/20VA(23-20)			
9VAC/20VA(17-14)			
ta 70/B			
14	17	20	23

NOTES:

Temp 20°C 48%RH
RoHS Compliant

2. ELECTRONICAL SCHEMATIC

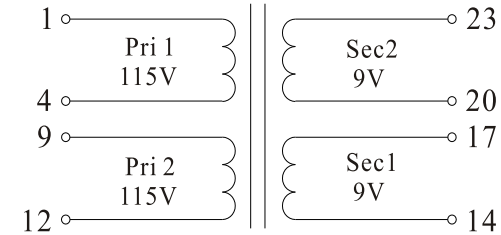

3. ELECTRONICAL SPECIFICATIONS

Pri voltage: 2X115V,50/60Hz

Sec load voltage: 2X9.0V ± 5% @ 2.222A

Noload voltage: 2X11.5V ± 5%

Output Power: 40VA

Hi-Pot: 2750V,50Hz,1mA,1min Pri to Sec

Note:

- Solderability: leads shall meet MIL-STD-202, Method 208D for solderability.
- Flammability: UL94V-0
- ASTM oxygen index: >28%

NAME:	Power Transformer		
CUSTOMER P/N:	BV UI 481 0002	DATE:	2023-09-13
SHINHOM P/N:	UI481768A	REV: A0	PAGE
DRAWN BY	CHECKED BY	APPROVE BY	



SHINHOM
SHAANXISHINHOM ENTERPRISE CO LTD

The Document property belong to SHINHOM & is not allowed to be duplicated without authorization