

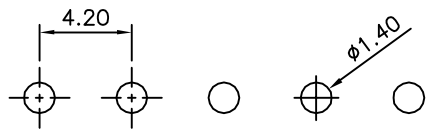
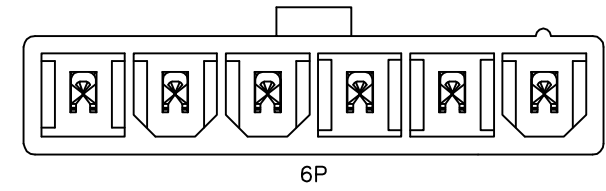
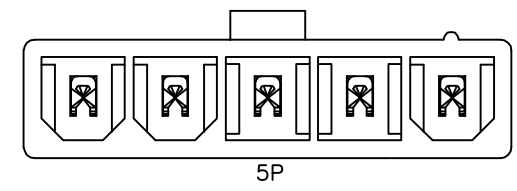
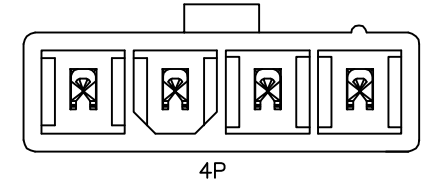


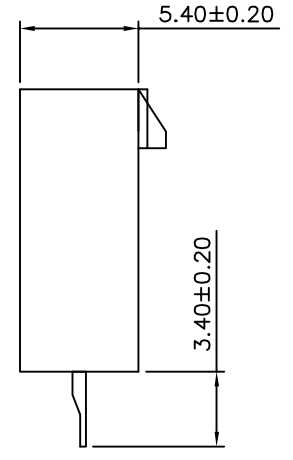


SPECIFICATION
 Current Rating:7A AC,DC
 Voltage Rating:600V AC,DC
 Withstanding Voltage:1500V AC/Minute
 Insulation Resistance:1000 Megohms Min.
 Contact Resistance:10 Milliohms Max.
 Operation Temperature:-25°C~+85°C
 Insulator:PA66
 Contact:Brass,Tin Plated Over Nickel
 RoHS Compliant

MF 1 X XX P D - XX - H
 (1) (2) (3) (4) (5) (6) (7)
 (1) MF:4.2mm Mini-Fit Series
 (2) 1:Single Row
 (3) XX:No. Of Position
 (4) P:Male
 (5) D:DIP Straight
 (6) XX:Flame Retardant
 Blank:UL94V-2,Nature Color
 V0:UL94V-0,White Color
 (7) H:RoHS Compliant

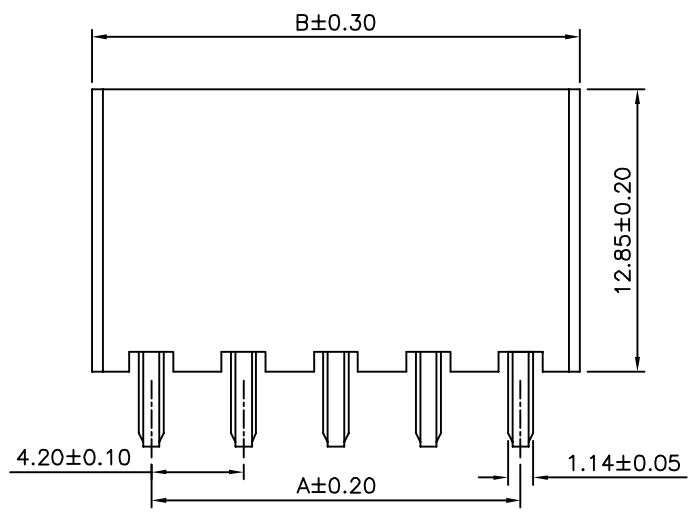

Recommended P.C.B. Layout

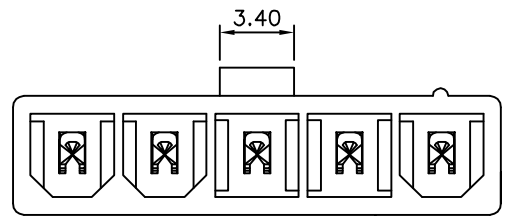

Pin	A	B
02	4.20	9.60
03	8.40	13.80
04	12.60	18.00
05	16.80	22.20
06	21.00	26.40

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.30 .X ±0.25 .XX ±0.20 .XXX ±0.015
PART No. MF1XXXPD-XX-H		EMILY		
DRAWING No. MF1XXXPD-XX-H		CHECKED BY HZF		
SCALE		DRAWING BY CYP		
SCALE	NONE	REV.	A0	UNIT mm

NO.	REV.	DESCRIPTION	CHK	DATE
△ A0		NEW RELEASE	HZF	08/03/2014
		REVISIONS		