

Data sheet

Commercial Art.No.: 70.300.1040.0

Female insert BAS BUS 10 2,5 50

Female insert revos basic, 10-poles, rated current: 16A, rated voltage:500V, with tin-plated contacts



| | |
|--------------------|---------------|
| Commercial Art.No. | 70.300.1040.0 |
| EAN | 4015573219601 |
| Order Unit | 10 |

Certificates / Approvals



Technical data

General

| | |
|--|---------------|
| Model | Female insert |
| Inflammability class of insulation material acc. with UL94 | V0 |
| Color | Grey |
| Mating cycles | 200 |
| Pollution degree | 3 |
| Modular version | No |
| Operating temperature range min. | -40 °C |
| Operating temperature range max. | 120 °C |

Connection Data

| | |
|--|------------------|
| Connection type | screw connection |
| Number of poles | 10 |
| Plus switching contacts | 0 |
| Number of pole for rated current 2 | 0 |
| Number of pole for rated current 3 | 0 |
| Total number of poles (without ground contact) | 10 |
| With wire protection | yes |
| Min. conductor diameter rigid (solid/stranded) | 0.5 mm² |
| Max. conductor diameter rigid (solid/stranded) | 2.5 mm² |
| Protective contact | yes |

Technical Data UL/CSA

| | |
|--|---------|
| Rated voltage according to UL/CSA | 600 V |
| Rated current according UL | 16 A |
| Rated current according CSA | 16 A |
| Min. conductor cross section flexible wire | 0.5 mm² |

| | |
|--|---------------------|
| Max. conductor cross section flexible wire | 2.5 mm ² |
| Conductor cross section flexible AWG wire | 22-14 AWG |

Model

| | |
|--------------|----|
| With housing | No |
|--------------|----|

Contacts

| | |
|--------------------|--------------|
| Contact material | Copper alloy |
| Surface | Tin-plated |
| Contact resistance | ≤ 1.5 mOhm |
| Wire strip length | 7 mm |

Screws head design/recomm. Torque

| | |
|-------------------------|---------------|
| Mounting screws | H1/0.5-0.7 Nm |
| Clamping screws | H1/0.5-0.7 Nm |
| Ground conductor screws | H2/1.2-1.6 Nm |

Technical Data DIN EN 61984

| | |
|---------------------------|-------|
| Nominal voltage | 500 V |
| Rated voltage face/ground | 500 V |
| Nominal current | 16 A |
| Rated impulse voltage | 6 kV |

Classification

| | |
|------------|----------|
| ECLASS 11 | |
| ECLASS 8.1 | 27440205 |
| ETIM 7.0 | EC000438 |
| ETIM 6.0 | EC000438 |
| ETIM 5.0 | EC000438 |
| ETIM 4.0 | EC000438 |

Product compliance

| | |
|------------------------------|--------------------|
| ROHS conformity status | Compliant/Exempted |
| ROHS exceptions | III-6(c) |
| REACH-SVHC conformity status | Duty-To-Declare |
| REACH-SVHC substances | Lead |
| REACH-SVHC CAS numbers | 7439-92-1 |

Fits with

| Commercial Art.No.: | Article-type description: | Description: |
|---------------------|--|--|
| 70.950.1053.3 | Multipole adapter set BAS GAZSHLS10 4,0 50 | Multipole adapter revos BASIC 500V/16A with base, screw connection 10 pole + ground, long design, male insert, ground left, double locking lever |
| 70.310.1040.0 | Male insert BAS STS 10 2,5 50 | Male insert revos basic, 10-poles, rated current: 16A, rated voltage: 500V, with tin-plated contacts |
| 70.311.1040.0 | Male insert BAS STS 10 2,5 50 AU | Male insert revos basic, 10-poles, rated current: 16A, rated voltage: 500V, with gold-plated contacts |

| | | |
|---------------|----------------------------------|---|
| 70.312.1640.0 | Male insert BAS STS OD 16 2,5 50 | Male insert revos basic, 16-poles, rated current: 16A, rated voltage: 500V, with tin-plated contacts |
| 70.510.1053.0 | Male insert BAS STF 10 2,5 50 | Male insert revos basic, 10-poles, rated current: 16A, rated voltage: 500V, with tin-plated contacts |
| 70.512.1053.0 | Male insert BAS STM 10 2,5 50 AG | Male insert revos basic, 10-poles, rated current: 16A, rated voltage: 500V, with silver-plated contacts |
| 70.710.1058.0 | Male insert BAS STC 10 50 | Male insert revos basic, 10-poles, rated current: 16A, rated voltage: 500V, with tin-plated contacts |
| 71.350.1035.0 | Hood BAS GOT GG 10 M20 A0 | Hood revos basic made of aluminum, for single locking lever with cable gland M20 on the right side (IP54), low version, 10-poles |
| 71.350.1035.1 | Hood BAS GOT GG 10 M20 A1 | Hood revos basic made of aluminum, for single locking lever with threaded hole M20 on the right side, low version, 10-poles |
| 71.350.1035.2 | Hood BAS GOT GG 10 M20 A2 | Hood revos basic made of aluminum, for single locking lever with nozzleM20 on the right side, low version, 10-poles |
| 71.350.1035.3 | Hood BAS GOT GG 10 M20 A3 | Hood revos basic made of aluminum, for single locking lever with trumpet gland M20 on the right side (IP54), low version, 10-poles |
| 71.352.1035.0 | Hood BAS GOT GI 10 M20 A0 | Hood revos basic made of aluminum, for single locking lever with cable gland M20 on the top (IP54), low version, 10-poles |
| 71.352.1035.1 | Hood BAS GOT GI 10 M20 A1 | Hood revos basic made of aluminum, for single locking lever with threaded hole M20 on the top, low version, 10-poles |
| 71.352.1035.2 | Hood BAS GOT GI 10 M20 A2 | Hood revos basic made of aluminum, for single locking lever with nozzleM20 on the top, low version, 10-poles |
| 71.352.1035.3 | Hood BAS GOT GI 10 M20 A3 | Hood revos basic made of aluminum, for single locking lever with trumpet gland M20 on the top (IP54), low version, 10-poles |
| 71.353.1035.0 | Hood BAS GOT GG 10 M25 A0 | Hood revos basic made of aluminum, for single locking lever with cable gland M25 on the right side (IP54), low version, 10-poles |
| 71.353.1035.1 | Hood BAS GOT GG 10 M25 A1 | Hood revos basic made of aluminum, for single locking lever with threaded hole M25 on the right side, low version, 10-poles |
| 71.353.1035.3 | Hood BAS GOT GG 10 M25 A3 | Hood revos basic made of aluminum, for single locking lever with trumpet gland M25 on the right side (IP54), low version, 10-poles |
| 71.354.1035.0 | Hood BAS GOT GI 10 M25 A1 | Hood revos basic made of aluminum, for single locking lever with threaded hole M25 on the top, low version, 10-poles |
| 71.354.1035.1 | Hood BAS GOT GI 10 M25 A2 | Hood revos basic made of aluminum, for single locking lever with nozzleM25 on the top, low version, 10-poles |
| 71.354.1035.3 | Hood BAS GOT GI 10 M25 A5 | Hood revos basic made of aluminum, for single locking lever with cable gland M25 on the top (IP65), low version, 10-poles |
| 71.372.1035.0 | Hood BAS GOT GL 10 M20 A0 | Hood revos basic made of aluminum, with single locking lever and cable gland M20 on the top - free cable connection (IP54), low version, 10-poles |
| 71.372.1035.1 | Hood BAS GOT GL 10 M20 A1 | Hood revos basic made of aluminum, with single locking lever and threaded hole M20 on the top - free cable connection, low version, 10-poles |
| 71.372.1035.3 | Hood BAS GOT GL 10 M20 A3 | Hood revos basic made of aluminum, with single locking lever and trumpet gland M20 on the top - free cable connection (IP54), low version, 10-poles |
| 71.450.1037.1 | Hood BAS GOM GG10 M20 B1 | Hood revos basic metal-series without coating, for single locking lever with threaded hole M20 on the right side, low version, 10-poles |
| 71.452.1037.1 | Hood BAS GOM GI10 M20 B1 | Hood revos basic metal-series without coating, for single locking lever with threaded hole M20 on the top, low version, 10-poles |
| 76.350.1035.0 | Hood BAS GOT GG 10HM25 50 A0 | Hood revos basic made of aluminum, for single locking lever with cable gland M25 on the right side (IP54), low version, 10-poles |
| 76.350.1035.1 | Hood BAS GOT GG 10HM25 50 A1 | Hood revos basic made of aluminum, for single locking lever with threaded hole M25 on the right side, low version, 10-poles |
| 76.351.1035.0 | Hood BAS GOT GH 10H M20 A0 | Hood revos basic made of aluminum, for single locking lever with cable gland M20 on the front (IP54), low version, 10-poles |

| | | |
|---------------|------------------------------|---|
| 76.351.1035.1 | Hood BAS GOT GH 10H M20 A1 | Hood revos basic made of aluminum, for single locking lever with threaded hole M20 on the front, low version, 10-poles |
| 76.351.1035.3 | Hood BAS GOT GH 10H M20 A3 | Hood revos basic made of aluminum, for single locking lever with trumpet gland M20 on the front (IP54), low version, 10-poles |
| 76.352.1035.0 | Hood BAS GOT GI 10HM25 50 A0 | Hood revos basic made of aluminum, for single locking lever with cable gland M25 on the top (IP54), low version, 10-poles |
| 76.352.1035.1 | Hood BAS GOT GI 10HM25 50 A1 | Hood revos basic made of aluminum, for single locking lever with threaded hole M25 on the top, low version, 10-poles |
| 76.353.1035.0 | Hood BAS GOT GG 10HM32 50 A0 | Hood revos basic made of aluminum, for single locking lever with cable gland M32 on the right side (IP54), low version, 10-poles |
| 76.353.1035.1 | Hood BAS GOT GG 10HM32 50 A1 | Hood revos basic made of aluminum, for single locking lever with threaded hole M32 on the right side, low version, 10-poles |
| 76.353.1035.2 | Hood BAS GOT GG 10HM32 50 A2 | Hood revos basic made of aluminum, for single locking lever with nozzleM32 on the right side, low version, 10-poles |
| 76.354.1035.0 | Hood BAS GOT GI 10HM32 50 A0 | Hood revos basic made of aluminum, for single locking lever with cable gland M32 on the top (IP54), low version, 10-poles |
| 76.354.1035.1 | Hood BAS GOT GI 10HM32 50 A1 | Hood revos basic made of aluminum, for single locking lever with threaded hole M32 on the top, low version, 10-poles |
| 76.354.1035.2 | Hood BAS GOT GI 10HM32 50 A2 | Hood revos basic made of aluminum, for single locking lever with nozzleM32 on the top, low version, 10-poles |
| 71.320.1028.0 | Bottom BAS GUT GK 10 A | Bottom-base revos basic made of aluminum, with single locking lever, open, low version, 10-poles |
| 71.325.1028.0 | Bottom BAS GUT GP 10 A | Bottom-base revos basic made of aluminum, with single locking lever, open, low version, 10-poles |
| 71.330.1035.0 | Bottom BAS GUT GL 10 M20 A0 | Bottom-base revos basic made of aluminum, with single locking lever and cable gland M20 on the right and left side (IP54), low version, 10-polig |
| 71.330.1035.1 | Bottom BAS GUT GL 10 M20 A1 | Bottom-base revos basic made of aluminum, with single locking lever and threaded hole M20 on the right and left side, low version, 10-polig |
| 71.331.1035.0 | Bottom BAS GUT GM 10 M20 A0 | Bottom-base revos basic made of aluminum, with single locking lever and cable gland M20 on the left side (IP54), low version, 10-polig |
| 71.331.1035.1 | Bottom BAS GUT GM 10 M20 A1 | Bottom-base revos basic made of aluminum, with single locking lever and threaded hole M20 on the left side, low version, 10-polig |
| 71.333.1035.0 | Bottom BAS GUT GO 10 M20 A0 | Bottom-base revos basic made of aluminum, with single locking lever and cable gland M20 on the bottom (IP54), low version, 10-polig |
| 71.333.1035.1 | Bottom BAS GUT GO 10 M20 A1 | Bottom-base revos basic made of aluminum, with single locking lever and threaded hole M20 on the bottom, low version, 10-polig |
| 71.335.1035.0 | Bottom BAS GUT GM 10 M25 A0 | Bottom-base revos basic made of aluminum, with single locking lever and cable gland M25 on the left side (IP54), low version, 10-polig |
| 71.335.1035.1 | Bottom BAS GUT GM 10 M25 A1 | Bottom-base revos basic made of aluminum, with single locking lever and threaded hole M25 on the left side, low version, 10-polig |
| 71.340.1035.0 | Bottom BAS GUT GR 10 M20 A0 | Bottom-base revos basic made of aluminum, with single locking lever and cable gland M20 on the right and the left side, with protective cover (IP54), low version, 10-polig |
| 71.340.1035.1 | Bottom BAS GUT GR 10 M20 A1 | Bottom-base revos basic made of aluminum, with single locking lever and threaded hole M20 on the right and the left side, with protective cover, low version, 10-polig |
| 71.341.1035.0 | Bottom BAS GUT GS 10 M20 A0 | Bottom-base revos basic made of aluminum, with single locking lever and cable gland M20 on the left side, with protective cover (IP54), low version, 10-polig |
| 71.341.1035.1 | Bottom BAS GUT GS 10 M20 A1 | Bottom-base revos basic made of aluminum, with single locking lever and threaded hole M20 on the left side, with protective cover, low version, 10-polig |
| 71.342.1035.0 | Bottom BAS GUT GT 10 M20 A0 | Bottom-base revos basic made of aluminum, with single locking lever and cable gland M20 on the right side, with protective cover (IP54), low version, 10-polig |

| | | |
|---------------|--------------------------------|--|
| 71.342.1035.1 | Bottom BAS GUT GT 10 M20 A1 | Bottom-base revos basic made of aluminum, with single locking lever and threaded hole M20 on the right side, with protective cover, low version, 10-polig |
| 71.343.1035.0 | Bottom BAS GUT GU 10 M20 A0 | Bottom-base revos basic made of aluminum, with single locking lever and cable gland M20 on the bottom, with protective cover (IP54), low version, 10-polig |
| 71.343.1035.1 | Bottom BAS GUT GU 10 M20 A1 | Bottom-base revos basic made of aluminum, with single locking lever and threaded hole M20 on the bottom, with protective cover, low version, 10-polig |
| 71.420.1037.0 | Bottom BAS GUM GK 10 B | Bottom-base revos basic metal-series without coating, open, low version, 10-poles |
| 71.425.1037.0 | Bottom BAS GUM GP 10 B | Bottom-base revos basic metal-series without coating, with single locking lever and protective cover, low version, 10-poles |
| 71.430.1037.1 | Bottom BAS GUM GL 10 M20 B1 | Bottom-base revos basic metal-series without coating, with single locking lever and threaded hole M20 on the right and left side, low version, 10-polig |
| 71.431.1037.1 | Bottom BAS GUM GM 10 M20 B1 | Bottom-base revos basic metal-series without coating, with single locking lever and threaded hole M20 on the left side, low version, 10-polig |
| 71.440.1037.1 | Bottom BAS GUM GR 10 M20 B1 | Bottom-base revos basic metal-series without coating, with single locking lever and threaded hole M20 on the right and the left side, with protective cover, low version, 10-polig |
| 71.441.1037.1 | Bottom BAS GUM GS 10 M20 B1 | Bottom-base revos basic metal-series without coating, with single locking lever and threaded hole M20 on the left side, with protective cover, low version, 10-polig |
| 76.330.1035.0 | Bottom BAS GUT GL 10HM25 50 A0 | Bottom-base revos basic made of aluminum, with single locking lever and cable gland M25 on the right and left side (IP54), low version, 10-polig |
| 76.330.1035.1 | Bottom BAS GUT GL 10HM25 50 A1 | Bottom-base revos basic made of aluminum, with single locking lever and threaded hole M25 on the right and left side, low version, 10-polig |
| 76.331.1035.0 | Bottom BAS GUT GM 10HM25 50 A0 | Bottom-base revos basic made of aluminum, with single locking lever and cable gland M25 on the left side (IP54), low version, 10-polig |
| 76.331.1035.1 | Bottom BAS GUT GM 10HM25 50 A1 | Bottom-base revos basic made of aluminum, with single locking lever and threaded hole M25 on the left side, low version, 10-polig |
| 76.334.1035.0 | Bottom BAS GUT GL 10HM32 50 A0 | Bottom-base revos basic made of aluminum, with single locking lever and cable gland M32 on the right and left side (IP54), low version, 10-polig |
| 76.334.1035.1 | Bottom BAS GUT GL 10HM32 50 A1 | Bottom-base revos basic made of aluminum, with single locking lever and threaded hole M32 on the right and left side, low version, 10-polig |
| 76.335.1035.1 | Bottom BAS GUT GM 10HM32 50 A1 | Bottom-base revos basic made of aluminum, with single locking lever and threaded hole M32 on the left side, low version, 10-polig |
| 76.340.1035.0 | Bottom BAS GUT GR 10HM25 50 A0 | Bottom-base revos basic made of aluminum, with single locking lever and cable gland M25 on the right and the left side, with protective cover (IP54), low version, 10-polig |
| 76.340.1035.1 | Bottom BAS GUT GR 10HM25 50 A1 | Bottom-base revos basic made of aluminum, with single locking lever and threaded hole M25 on the right and the left side, with protective cover, low version, 10-polig |
| 76.341.1035.0 | Bottom BAS GUT GS 10HM25 50 A0 | Bottom-base revos basic made of aluminum, with single locking lever and cable gland M25 on the left side, with protective cover (IP54), low version, 10-polig |
| 76.341.1035.1 | Bottom BAS GUT GS 10HM25 50 A1 | Bottom-base revos basic made of aluminum, with single locking lever and threaded hole M25 on the left side, with protective cover, low version, 10-polig |
| 76.342.1035.0 | Bottom BAS GUT GT 10HM25 50 A0 | Bottom-base revos basic made of aluminum, with single locking lever and cable gland M25 on the right side, with protective cover (IP54), low version, 10-polig |

| | | |
|---------------|--------------------------------|---|
| 76.342.1035.1 | Bottom BAS GUT GM 10HM25 50 A1 | Bottom-base revos basic made of aluminum, with single locking lever and threaded hole M25 on the left side, low version, 10-polig |
| 76.344.1035.0 | Bottom BAS GUT GR 10HM32 50 A0 | Bottom-base revos basic made of aluminum, with single locking lever and cable gland M32 on the right and the left side, with protective cover (IP54), low version, 10-polig |
| 76.344.1035.1 | Bottom BAS GUT GR 10HM32 50 A1 | Bottom-base revos basic made of aluminum, with single locking lever and threaded hole M32 on the right and the left side, with protective cover, low version, 10-polig |
| 76.345.1035.1 | Bottom BAS GUT GS 10HM32 50 A1 | Bottom-base revos basic made of aluminum, with single locking lever and threaded hole M32 on the left side, with protective cover, low version, 10-polig |
| 76.346.1035.1 | Bottom BAS GUT GT 10HM32 50 A1 | Bottom-base revos basic made of aluminum, with single locking lever and threaded hole M32 on the right side, with protective cover, low version, 10-polig |
| 70.350.1035.0 | Hood BAS GOT GA 10 M20 A0 | Hood revos basic made of aluminum, for double locking lever or. screw cap with cable gland M20 on the right side (IP54), low version, 10-poles |
| 70.350.1035.1 | Hood BAS GOT GA 10 M20 A1 | Hood revos basic made of aluminum, for double locking lever or. screw cap with threaded hole M20 on the right side, low version, 10-poles |
| 70.350.1035.2 | Hood BAS GOT GA 10 M20 A2 | Hood revos basic made of aluminum, for double locking lever or. screw cap with nozzle M20 on the right side, low version, 10-poles |
| 70.350.1035.3 | Hood BAS GOT GA 10 M20 A3 | Hood revos basic made of aluminum, for double locking lever or. screw cap with trumpet gland M20 on the right side (IP54), low version, 10-poles |
| 70.352.1035.0 | Hood BAS GOT GC 10 M20 A0 | Hood revos basic made of aluminum, for double locking lever or. screw cap with cable gland M20 on the top (IP54), low version, 10-poles |
| 70.352.1035.1 | Hood BAS GOT GC 10 M20 A1 | Hood revos basic made of aluminum, for double locking lever or. screw cap with threaded hole M20 on the top, low version, 10-poles |
| 70.352.1035.2 | Hood BAS GOT GC 10 M20 A2 | Hood revos basic made of aluminum, for double locking lever or. screw cap with nozzle M20 on the top, low version, 10-poles |
| 70.352.1035.3 | Hood BAS GOT GC 10 M20 A3 | Hood revos basic made of aluminum, for double locking lever or. screw cap with trumpet gland M20 on the top (IP54), low version, 10-poles |
| 70.353.1035.0 | Hood BAS GOT GA 10 M25 A0 | Hood revos basic made of aluminum, for double locking lever or. screw cap with cable gland M25 on the right side (IP54), low version, 10-poles |
| 70.353.1035.1 | Hood BAS GOT GA 10 M25 A1 | Hood revos basic made of aluminum, for double locking lever or. screw cap with threaded hole M25 on the right side, low version, 10-poles |
| 70.353.1035.2 | Hood BAS GOT GA 10 M25 A2 | Hood revos basic made of aluminum, for double locking lever or. screw cap with nozzle M25 on the right side, low version, 10-poles |
| 70.353.1035.3 | Hood BAS GOT GA 10 M25 A3 | Hood revos basic made of aluminum, for double locking lever or. screw cap with trumpet gland M25 on the right side (IP54), low version, 10-poles |
| 70.354.1035.0 | Hood BAS GOT GC 10 M25 A0 | Hood revos basic made of aluminum, for double locking lever or. screw cap with cable gland M25 on the top (IP54), low version, 10-poles |
| 70.354.1035.1 | Hood BAS GOT GC 10 M25 A1 | Hood revos basic made of aluminum, for double locking lever or. screw cap with threaded hole M25 on the top, low version, 10-poles |
| 70.354.1035.2 | Hood BAS GOT GC 10 M25 A2 | Hood revos basic made of aluminum, for double locking lever or. screw cap with nozzle M25 on the top, low version, 10-poles |
| 70.354.1035.3 | Hood BAS GOT GC 10 M25 A3 | Hood revos basic made of aluminum, for double locking lever or. screw cap with trumpet gland M25 on the top (IP54), low version, 10-poles |

| | | |
|---------------|------------------------------|---|
| 70.355.1035.0 | Hood BAS GOT GD 10 M20 A0 | Hood revos basic made of aluminum, with double locking lever and cable gland M20 on the right side (IP54), low version, 10-poles |
| 70.355.1035.1 | Hood BAS GOT GD 10 M20 A1 | Hood revos basic made of aluminum, with double locking lever and threaded hole M20 on the right side, low version, 10-poles |
| 70.355.1035.2 | Hood BAS GOT GD 10 M20 A2 | Hood revos basic made of aluminum, with double locking lever and nozzle M20 on the right side, low version, 10-poles |
| 70.355.1035.3 | Hood BAS GOT GD 10 M20 A3 | Hood revos basic made of aluminum, with double locking lever and trumpet gland M20 on the right side (IP54), low version, 10-poles |
| 70.357.1035.0 | Hood BAS GOT GF 10 M20 A0 | Hood revos basic made of aluminum, with double locking lever and cable gland M20 on the top (IP54), low version, 10-poles |
| 70.357.1035.1 | Hood BAS GOT GF 10 M20 A1 | Hood revos basic made of aluminum, with double locking lever and threaded hole M20 on the top, low version, 10-poles |
| 70.357.1035.3 | Hood BAS GOT GF 10 M20 A3 | Hood revos basic made of aluminum, with double locking lever and trumpet gland M20 on the top (IP54), low version, 10-poles |
| 70.358.1035.0 | Hood BAS GOT GD 10 M25 A0 | Hood revos basic made of aluminum, with double locking lever and cable gland M25 on the right side (IP54), low version, 10-poles |
| 70.358.1035.1 | Hood BAS GOT GD 10 M25 A1 | Hood revos basic made of aluminum, with double locking lever and threaded hole M25 on the right side, low version, 10-poles |
| 70.358.1035.3 | Hood BAS GOT GD 10 M25 A3 | Hood revos basic made of aluminum, with double locking lever and trumpet gland M25 on the right side (IP54), low version, 10-poles |
| 70.359.1035.0 | Hood BAS GOT GF 10 M25 A0 | Hood revos basic made of aluminum, with double locking lever and cable gland M25 on the top (IP54), low version, 10-poles |
| 70.359.1035.1 | Hood BAS GOT GF 10 M25 A1 | Hood revos basic made of aluminum, with double locking lever and threaded hole M25 on the top, low version, 10-poles |
| 70.359.1035.3 | Hood BAS GOT GF 10 M25 A3 | Hood revos basic made of aluminum, with double locking lever and trumpet gland M25 on the top (IP54), low version, 10-poles |
| 70.372.1035.0 | Hood BAS GOT GK 10 M20 A0 | Hood revos basic made of aluminum, with double locking lever and cable gland M20 on the top - free cable connection (IP54), low version, 10-poles |
| 70.372.1035.1 | Hood BAS GOT GK 10 M20 A1 | Hood revos basic made of aluminum, with double locking lever and threaded hole M20 on the top - free cable connection, low version, 10-poles |
| 70.372.1035.3 | Hood BAS GOT GK 10 M20 A3 | Hood revos basic made of aluminum, with double locking lever and trumpet gland M20 on the top - free cable connection (IP54), low version, 10-poles |
| 73.350.1035.0 | Hood BAS GOT GA 10HM25 50 A0 | Hood revos basic made of aluminum, for double locking lever or. screw cap with cable gland M25 on the right side (IP54), low version, 10-poles |
| 73.350.1035.1 | Hood BAS GOT GA 10HM25 50 A1 | Hood revos basic made of aluminum, for double locking lever or. screw cap with threaded hole M25 on the right side, low version, 10-poles |
| 73.350.1035.3 | Hood BAS GOT GA 10 M20 A3 | Hood revos basic made of aluminum, for double locking lever or. screw cap with trumpet gland M20 on the right side (IP54), low version, 10-poles |
| 73.351.1035.0 | Hood BAS GOT GB 10H M20 A0 | Hood revos basic made of aluminum, for double locking lever and cable gland M20 on the front (IP54), low version, 10-poles |
| 73.351.1035.1 | Hood BAS GOT GB 10H M20 A1 | Hood revos basic made of aluminum, for double locking lever and threaded hole M20 on the front, low version, 10-poles |
| 73.352.1035.0 | Hood BAS GOT GC 10HM25 50 A0 | Hood revos basic made of aluminum, for double locking lever or. screw cap with cable gland M25 on the top (IP54), low version, 10-poles |
| 73.352.1035.1 | Hood BAS GOT GC 10HM25 50 A1 | Hood revos basic made of aluminum, for double locking lever or. screw cap with threaded hole M25 on the top, low version, 10-poles |
| 73.353.1035.0 | Hood BAS GOT GA 10HM32 50 A0 | Hood revos basic made of aluminum, for double locking lever or. screw cap with cable gland M32 on the right side (IP54), low version, 10-poles |

| | | |
|---------------|--------------------------------|--|
| 73.353.1035.1 | Hood BAS GOT GA 10HM32 50 A1 | Hood revos basic made of aluminum, for double locking lever or. screw cap with threaded hole M32 on the right side, low version, 10-poles |
| 73.353.1035.3 | Hood BAS GOT GA 10HM32 50 A3 | Hood revos basic made of aluminum, for double locking lever or. screw cap with trumpet gland M32 on the right side (IP54), low version, 10-poles |
| 73.354.1035.0 | Hood BAS GOT GC 10HM32 50 A0 | Hood revos basic made of aluminum, for double locking lever or. screw cap with cable gland M32 on the top (IP54), low version, 10-poles |
| 73.354.1035.1 | Hood BAS GOT GC 10HM32 50 A1 | Hood revos basic made of aluminum, for double locking lever or. screw cap with threaded hole M32 on the top, low version, 10-poles |
| 70.320.1028.0 | Bottom BAS GUT GA 10 A | Bottom-base revos basic made of aluminum, with double locking lever or.screw cap, low version, 10-poles |
| 70.325.1028.0 | Bottom BAS GUT GE 10 A | Bottom-base revos basic made of aluminum, for double locking lever and protective cover, open, low version, 10-poles |
| 70.330.1035.0 | Bottom BAS GUT GB 10 M20 A0 | Bottom-base revos basic made of aluminum, with double locking lever or.screw cap with cable gland M20 on the right and left side (IP54), low version, 10-polig |
| 70.330.1035.1 | Bottom BAS GUT GB 10 M20 A1 | Bottom-base revos basic made of aluminum, with double locking lever or.screw cap with threaded hole M20 on the right and left side, low version, 10-polig |
| 70.331.1035.0 | Bottom BAS GUT GC 10 M20 A0 | Bottom-base revos basic made of aluminum, with double locking lever or.screw cap with cable gland M20 on the left side (IP54), low version, 10-polig |
| 70.331.1035.1 | Bottom BAS GUT GC 10 M20 A1 | Bottom-base revos basic made of aluminum, with double locking lever or.screw cap with threaded hole M20 on the left side, low version, 10-polig |
| 70.333.1035.0 | Bottom BAS GUT GD 10 M20 A0 | Bottom-base revos basic made of aluminum, with double locking lever or.screw cap with cable gland M20 on the right side (IP54), low version, 10-polig |
| 70.333.1035.1 | Bottom BAS GUT GD 10 M20 A1 | Bottom-base revos basic made of aluminum, with double locking lever or.screw cap with threaded hole M20 on the right side, low version, 10-polig |
| 70.334.1035.0 | Bottom BAS GUT GB 10 M25 A0 | Bottom-base revos basic made of aluminum, with double locking lever or.screw cap with cable gland M25 on the right and left side (IP54), low version, 10-polig |
| 70.334.1035.1 | Bottom BAS GUT GB 10 M25 A1 | Bottom-base revos basic made of aluminum, with double locking lever or.screw cap with threaded hole M25 on the right and left side, low version, 10-polig |
| 70.335.1035.0 | Bottom BAS GUT GC 10 M25 50 A0 | Bottom-base revos basic made of aluminum, with double locking lever or.screw cap with cable gland M25 on the left side (IP54), low version, 10-polig |
| 70.335.1035.1 | Bottom BAS GUT GC 10 M25 A1 | Bottom-base revos basic made of aluminum, with double locking lever or.screw cap with threaded hole M25 on the left side, low version, 10-polig |
| 70.337.1035.1 | Bottom BAS GUT GD 10 M25 A1 | Bottom-base revos basic made of aluminum, with double locking lever or.screw cap with threaded hole M25 on the right side, low version, 10-polig |
| 70.340.1035.0 | Bottom BAS GUT GF 10 M20 A0 | Bottom-base revos basic made of aluminum, for double locking lever withcable gland M20 on the left and right side, with protective cover (IP54), low version, 10-polig |
| 70.340.1035.1 | Bottom BAS GUT GF 10 M20 A1 | Bottom-base revos basic made of aluminum, for double locking lever withthreaded hole M20 on the left and right side, with protective cover, low version, 10-polig |
| 70.341.1035.0 | Bottom BAS GUT GG 10 M20 A0 | Bottom-base revos basic made of aluminum, with double locking lever andcable gland M20 on the left side, with protective cover (IP54), low version, 10-polig |

| | | |
|---------------|--------------------------------|---|
| 70.341.1035.1 | Bottom BAS GUT GG 10 M20 A1 | Bottom-base revos basic made of aluminum, with double locking lever and threaded hole M20 on the left side, with protective cover, low version, 10-polig |
| 70.342.1035.0 | Bottom BAS GUT GH 10 M20 A0 | Bottom-base revos basic made of aluminum, with double locking lever and cable gland M20 on the right side, with protective cover (IP54), low version, 10-polig |
| 70.342.1035.1 | Bottom BAS GUT GH 10 M20 A1 | Bottom-base revos basic made of aluminum, with double locking lever and threaded hole M20 on the right side, with protective cover, low version, 10-polig |
| 70.343.1035.0 | Bottom BAS GUT GI 10 M20 A0 | Bottom-base revos basic made of aluminum, with double locking lever and cable gland M20 on the bottom, with protective cover (IP54), low version, 10-polig |
| 70.343.1035.1 | Bottom BAS GUT GI 10 M20 A1 | Bottom-base revos basic made of aluminum, with double locking lever and threaded hole M20 on the bottom, with protective cover, low version, 10-polig |
| 70.344.1035.1 | Bottom BAS GUT GB 10 M25 A | Bottom-base revos basic made of aluminum, with protective cover and cable glands on the right and left side (IP54), low version, 10-poles |
| 73.330.1035.0 | Bottom BAS GUT GB 10HM25 50 A0 | Bottom-base revos basic made of aluminum, with double locking lever or screw cap with cable gland M25 on the right and left side (IP54), low version, 10-polig |
| 73.330.1035.1 | Bottom BAS GUT GB 10HM25 50 A1 | Bottom-base revos basic made of aluminum, with double locking lever or screw cap with threaded hole M25 on the right and left side, low version, 10-polig |
| 73.331.1035.0 | Bottom BAS GUT GC 10HM25 50 A0 | Bottom-base revos basic made of aluminum, with double locking lever or screw cap with cable gland M25 on the left side (IP54), low version, 10-polig |
| 73.331.1035.1 | Bottom BAS GUT GC 10HM25 50 A1 | Bottom-base revos basic made of aluminum, with double locking lever or screw cap with threaded hole M25 on the left side, low version, 10-polig |
| 73.334.1035.0 | Bottom BAS GUT GB 10HM32 50 A0 | Bottom-base revos basic made of aluminum, with double locking lever or screw cap with cable gland M32 on the right and left side (IP54), low version, 10-polig |
| 73.334.1035.1 | Bottom BAS GUT GB 10HM32 50 A1 | Bottom-base revos basic made of aluminum, with double locking lever or screw cap with threaded hole M32 on the right and left side, low version, 10-polig |
| 73.335.1035.0 | Bottom BAS GUT GC 10HM32 50 A0 | Bottom-base revos basic made of aluminum, with double locking lever or screw cap with cable gland M32 on the left side (IP54), low version, 10-polig |
| 73.335.1035.1 | Bottom BAS GUT GC 10HM32 50 A1 | Bottom-base revos basic made of aluminum, with double locking lever or screw cap with threaded hole M32 on the left side, low version, 10-polig |
| 73.340.1035.0 | Bottom BAS GUT GF 10HM25 50 A0 | Bottom-base revos basic made of aluminum, for double locking lever with cable gland M25 on the left and right side, with protective cover (IP54), low version, 10-polig |
| 73.340.1035.1 | Bottom BAS GUT GF 10HM25 50 A1 | Bottom-base revos basic made of aluminum, for double locking lever with threaded hole M25 on the left and right side, with protective cover, low version, 10-polig |
| 73.341.1035.1 | Bottom BAS GUT GG 10HM25 50 A1 | Bottom-base revos basic made of aluminum, with double locking lever and threaded hole M25 on the left side, with protective cover, low version, 10-polig |
| 73.342.1035.1 | Bottom BAS GUT GH 10HM25 50 A1 | Bottom-base revos basic made of aluminum, with double locking lever and threaded hole M25 on the right side, with protective cover, low version, 10-polig |
| 73.344.1035.1 | Bottom BAS GUT GF 10HM32 50 A1 | Bottom-base revos basic made of aluminum, for double locking lever with threaded hole M32 on the left and right side, with protective cover, low version, 10-polig |

| | | |
|---------------|--|--|
| 73.345.1035.0 | Bottom BAS GUT GG 10HM32 50 A0 | Bottom-base revos basic made of aluminum, with double locking lever and cable gland M32 on the left side, with protective cover (IP54), low version, 10-pole |
| 73.345.1035.1 | Bottom BAS GUT GG 10HM32 50 A1 | Bottom-base revos basic made of aluminum, with double locking lever and threaded hole M32 on the left side, with protective cover, low version, 10-pole |
| 70.415.1053.0 | Male insert BAS STP 10 2,5 50 AG | Male insert revos basic, 10-poles, rated current: 16A, rated voltage: 500V, with silver-plated contacts |
| 70.110.1053.3 | Multipole adapter BAS SAS LL 10 4,0 50 | Multipole adapter revos BASIC 500V/16A screw connection 10 pole + ground, long design, male insert, ground left |
| 70.110.1053.4 | Multipole adapter BAS SAS KL 10 4,0 50 | Multipole adapter revos BASIC 500V/16A screw connection 10 pole + ground, short design, male insert, ground right |
| 70.115.1053.3 | Multipole adapter BAS SAS LR 10 4,0 50 | Multipole adapter revos BASIC 500V/16A screw connection 10 pole + ground, long design, female insert, ground left |
| 70.115.1053.4 | Multipole adapter BAS SAS KR 10 4,0 50 | Multipole adapter revos BASIC 500V/16A screw connection 10 pole + ground, short design, female insert, ground left |
| 70.111.1053.0 | Multipole adapter BAS SAF KL 10 2,5 50 | Multipole adapter revos BASIC 500V/16A spring clamp connection 10 pole + ground, short design, male insert, ground left |
| 70.116.1053.0 | Multipole adapter BAS SAF KR 10 2,5 50 | Multipole adapter revos BASIC 500V/16A spring clamp connection 10 pole + ground, short design, male insert, ground right |
| 70.312.1040.0 | Male insert BAS STS OD 10 2,5 50 | Male insert revos basic, 10-poles, rated current: 16A, rated voltage: 500V, with tin-plated contacts |

| | | | |
|---|--|---|---|
| | 1 | 2 | |
| A | Kodieransichten Ausführung 6-/16-/24-polig Coding view execution 6-/16-/24-pole | | © |

B

These dimensions will be especially checked at delivery


Only inspection dimensions

With /E marked dimensions are only valid for internal use

6-polig/6-pole
70.300.0640.0


Technical drawing of a 6-pole terminal block (70.300.0640.0). The drawing includes a top view and a side view. The top view shows a rectangular block with six circular terminals arranged in two rows of three. The side view shows the profile of the block with dimensions. Dimensions are given in millimeters (mm). Key dimensions include: overall width 12.5 mm, overall height 12.5 mm, terminal diameter 4.0 mm, terminal pitch 5.0 mm, and terminal depth 1.5 mm. The drawing is labeled '6-polig/6-pole' and '70.300.0640.0'. A note indicates that dimensions marked with a slash and 'E' are only valid for internal use.

16-polig/16-pole
70.300.164 0.0

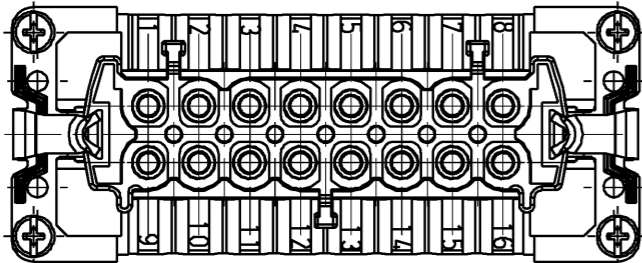

Die Maße werden bei Abnahme besonders geprüft
Ausschließlich Prüfmaße
Mit IE gekennzeichnete Maße sind nur für interne Zwecke gültig



24-polig/24-pole
70.300.2440.0

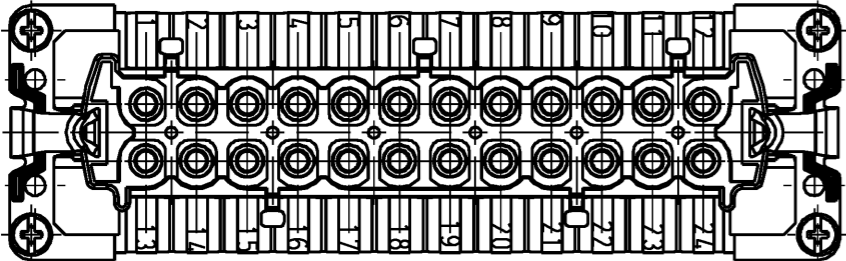





E

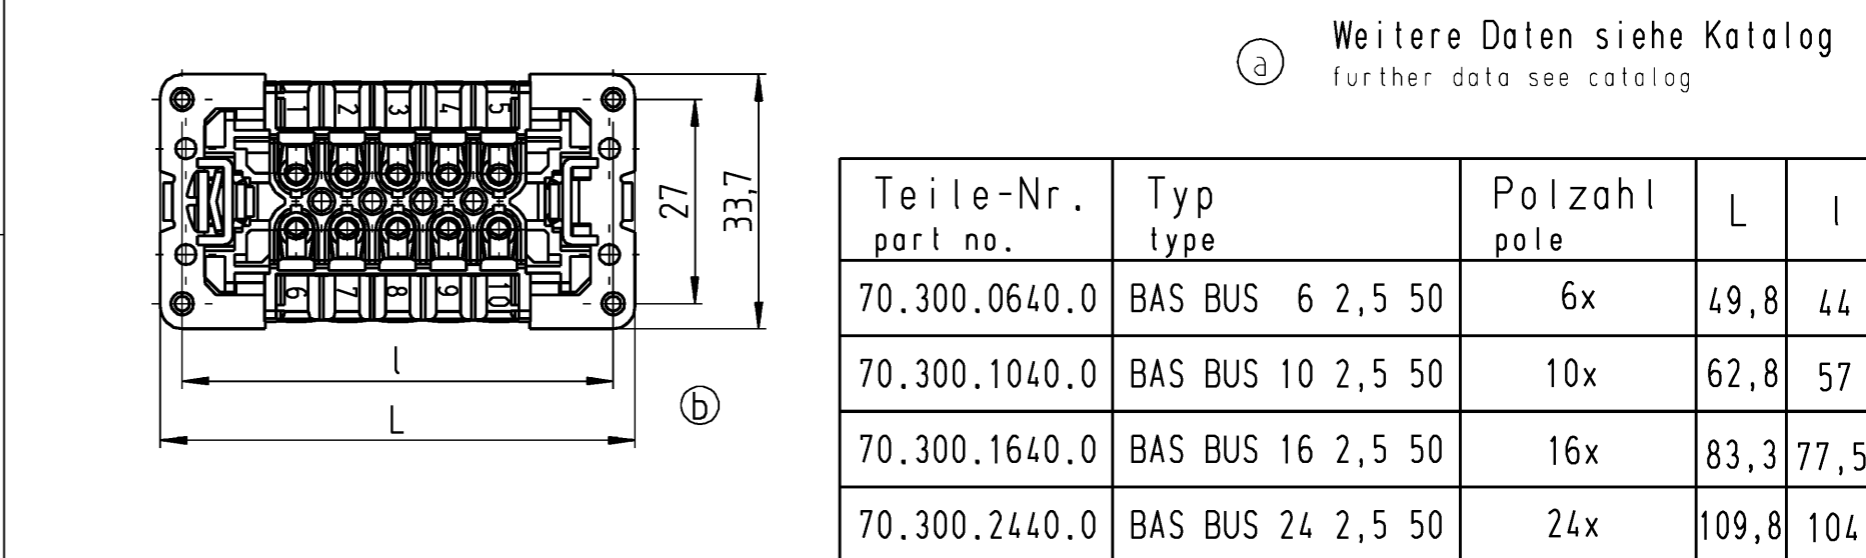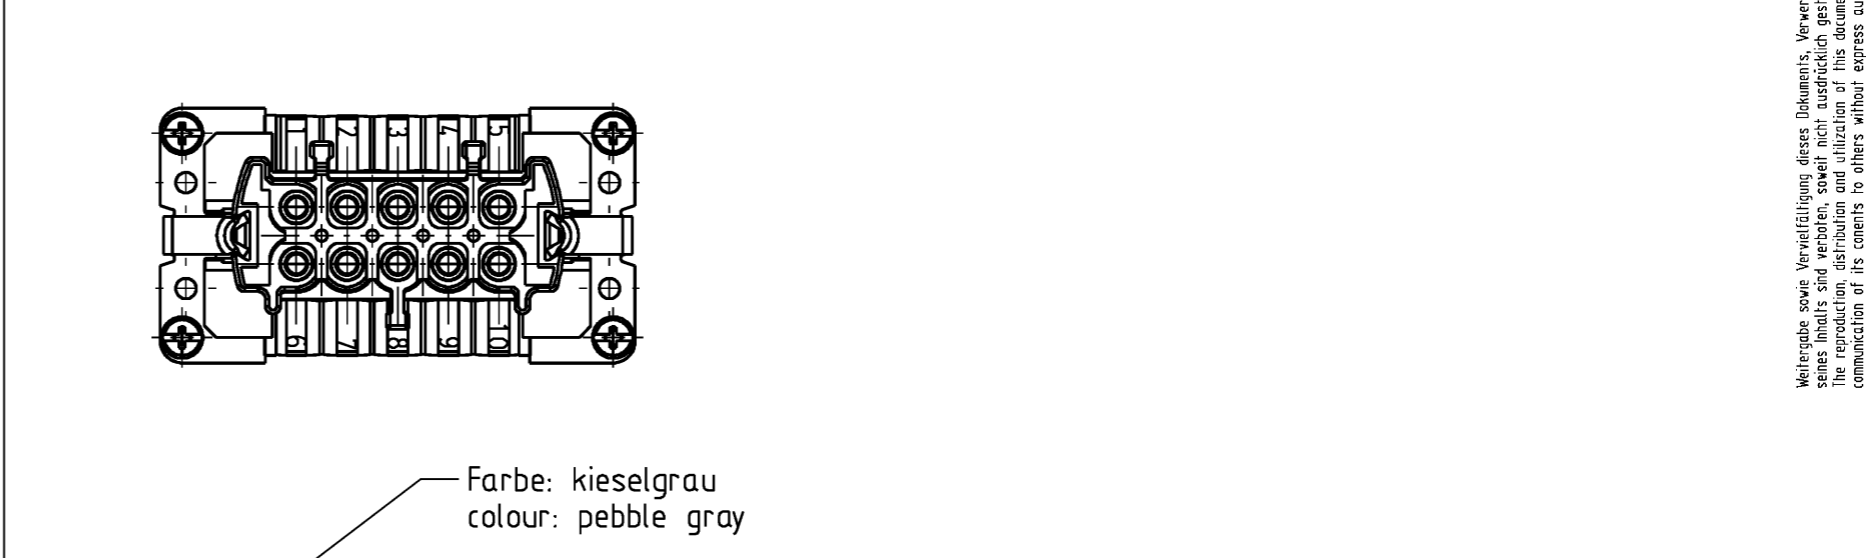F

10-polig/10-pole
70.300.104 0.0



| | | | | | | | | | | |
|---|-------------------------------|--|---|-----------|--|---|-----------------|-----------------------------|------------------|-----|
| Tolerierung Size ISO 14405 (E) / Tolerance system Size ISO 14405 (E). (This ISO-standard describes the envelope principle. According to the envelope principle the deviations of form and parallelism are limited by the size tolerances). | | | | | ja/yes <input checked="" type="checkbox"/> Stoffverbots- und Deklarationsliste nach WN 5020.010 ist einzuhalten. Conformity with Wieland document WN 5020.010 e (list of prohibited de- clarable hazardous substances) to be declared! | | | | | |
| Freitoleranz nach General tolerance | | | CAD - Zeichnung, keine manuellen Änderungen CAD - drawing, no manual modifications allowed | | | 1. Verwendung: First Use: | | Blatt: 1 von Sheet: 1 of | | |
| | / |  Maßstab / Scale 1:1 | Werkstoff / Material | | gezeichnet drawn | 09.07.2003 | Bauer | T | 70.300.0640.001K | Ind |
| | / | | | | geprüft checked | | | | | |
| | / | | | | Normgepr. Stand. check | | | | | |
| | / | | | | | | | | | |
| c | 31.01.2017 / | Vol. | mm³ | Ofl./Srf. | mm² | Ersatz für / Replacement for: | | | | |
| b | 23.04.2012 / |  wieland www.wieland-electric.com | | | | Type | Benennung/Title | | | |
| a | 23.04.20004 / | | | | | | | | | |
| Index | Datum / Blatt Date / Sheet | | | | | | | | | |
| Änderung / Revision | | | | | | | | | | |
| | | | | | | BUCHSENEINSATZ 2,5 qmm 500V 16A Schraubanschluss u. Drahtschutz male insert screw connection and wire protection | | | | |

| | | | | | | | | | | | | | |
|---|-------------------------------|--|----------------------|---|-----------|--|--|------------------------------|---|-----------------------------------|--|-----------------------------|-----|
| Tolerierung Size ISO 14405 (E) / Tolerance system Size ISO 14405 (E). (This ISO-standard describes the envelope principle. According to the envelope principle the deviations of form and parallelism are limited by the size tolerances). | | | | | | ja/yes <input checked="" type="checkbox"/> Stoffverbots- und Deklarationsliste nach WN 5020.010 ist einzuhalten. Conformity with Wieland document WN 5020.010 e (list of prohibited de- clarable hazardous substances) to be declared! | | | | | | | |
| Freitoleranz nach General tolerance | | | | CAD - Zeichnung, keine manuellen Änderungen CAD - drawing, no manual modifications allowed | | | | 1. Verwendung: First Use: | | | | Blatt: 1 von Sheet: 1 of | |
| | / |  | Werkstoff / Material | | | | Tag/Date | Name | T | Zeichnung Nr. / Drawing No. | | | Ind |
| | / | | | | | gezeichnet drawn | 09.07.2003 | Bauer | | Maße in mm / Dimensions are in mm | | | |
| | / | | | | | geprüft checked | | | | | | | |
| | / | | | | | Normgepr. Stand. check | | | | | | | |
| c | 31.01.2017 / | Maßstab / Scale 1:1 | Vol. | mm³ | Ofl./Srf. | mm² | Ersatz für / Replacement for: | | | | | | |
| b | 23.04.2012 / |  wieland www.wieland-electric.com | Type | | | | Benennung/Title BUCHSENEINSATZ 2,5 qmm 500V 16A Schraubanschluss u. Drahtschutz male insert screw connection and wire protection | | | | | | |
| a | 23.04.20004 / | | | | | | | | | | | | |
| Index | Datum / Blatt Date / Sheet | | | | | | | | | | | | |
| Änderung / Revision | | | | | | | | | | | | | |

| | | | | |
|---|--|---|---|----------------|
| 3 | | 4 | 5 | 6 QU-MEE-01/14 |
|---|--|---|---|----------------|