


Data sheet

Commercial Art.No.: 70.310.1640.0

Male insert BAS STS 16 2,5 50

Male insert revos basic, 16-poles, rated current: 16A, rated voltage: 500V, with tin-plated contacts

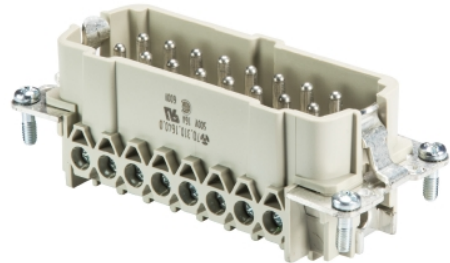

| | |
|--------------------|---------------|
| Commercial Art.No. | 70.310.1640.0 |
| EAN | 4015573219892 |
| Order Unit | 10 |

Certificates / Approvals



Technical data

General

| | |
|--|------------|
| Model | Pin insert |
| Inflammability class of insulation material acc. with UL94 | V0 |
| Color | Grey |
| Mating cycles | 200 |
| Pollution degree | 3 |
| Modular version | No |
| Operating temperature range min. | -40 °C |
| Operating temperature range max. | 120 °C |

Connection Data

| | |
|--|---------------------|
| Connection type | screw connection |
| Number of poles | 16 |
| Plus switching contacts | 0 |
| Number of pole for rated current 2 | 0 |
| Number of pole for rated current 3 | 0 |
| Total number of poles (without ground contact) | 16 |
| With wire protection | yes |
| Min. conductor diameter rigid (solid/stranded) | 0.5 mm ² |
| Max. conductor diameter rigid (solid/stranded) | 2.5 mm ² |
| Protective contact | yes |

Technical Data UL/CSA

| | |
|--|---------------------|
| Rated voltage according to UL/CSA | 600 V |
| Rated current according UL | 16 A |
| Rated current according CSA | 16 A |
| Min. conductor cross section flexible wire | 0.5 mm ² |
| Max. conductor cross section flexible wire | 2.5 mm ² |

| | |
|---|-----------|
| Conductor cross section flexible AWG wire | 22-14 AWG |
|---|-----------|

Model

| | |
|--------------|----|
| With housing | No |
|--------------|----|

Contacts

| | |
|--------------------|--------------|
| Contact material | Copper alloy |
| Surface | Tin-plated |
| Contact resistance | ≤ 1.5 mOhm |
| Wire strip length | 7 mm |

Screws head design/recomm. Torque

| | |
|-------------------------|---------------|
| Mounting screws | H1/0.5-0.7 Nm |
| Clamping screws | H1/0.5-0.7 Nm |
| Ground conductor screws | H2/1.2-1.6 Nm |

Technical Data DIN EN 61984

| | |
|---------------------------|-------|
| Nominal voltage | 500 V |
| Rated voltage face/ground | 500 V |
| Nominal current | 16 A |
| Rated impulse voltage | 6 kV |

Classification

| | |
|------------|----------|
| ECLASS 11 | |
| ECLASS 8.1 | 27440205 |
| ETIM 7.0 | EC000438 |
| ETIM 6.0 | EC000438 |
| ETIM 5.0 | EC000438 |
| ETIM 4.0 | EC000438 |
| ETIM 3.0 | EC000438 |

Product compliance

| | |
|------------------------------|--------------------|
| ROHS conformity status | Compliant/Exempted |
| ROHS exceptions | III-6(c) |
| REACH-SVHC conformity status | Duty-To-Declare |
| REACH-SVHC substances | Lead |
| REACH-SVHC CAS numbers | 7439-92-1 |

Fits with

| Commercial Art.No.: | Article-type description: | Description: |
|---------------------|--|---|
| 70.940.1653.3 | Multipole adapter set BAS GAZSHLB16 4,0 50 | Multipole adapter revos BASIC 500V/16A with base, screw connection 16 pole + ground, long design, female insert, ground left, double locking lever |
| 70.940.1653.4 | Multipole adapter set BAS GAZSNLB16 4,0 50 | Multipole adapter revos BASIC 500V/16A with base, screw connection 16 pole + ground, short design, female insert, ground left, double locking lever |

| | | |
|---------------|--|--|
| 70.945.1653.3 | Multipole adapter set BAS GAZSHRB16 4,0 50 | Multipole adapter revos BASIC 500V/16A with base, screw connection 16 pole + ground, long design, female insert, ground right, double locking lever |
| 70.945.1653.4 | Multipole adapter set BAS GAZSNRB16 4,0 50 | Multipole adapter revos BASIC 500V/16A with base, screw connection 16 pole + ground, short design, female insert, ground right, double locking lever |
| 70.500.1653.0 | Female insert BAS BUF 16 2,5 50 | Female insert revos basic, 16-poles, rated current: 16A, rated voltage:500V, with silver-plated contacts |
| 70.502.1653.0 | Female insert BAS BUM 16 2,5 50 AG | Female insert revos basic, 16-poles, rated current: 16A, rated voltage:500V, with silver-plated contacts |
| 70.700.1658.0 | Female insert BAS BUC 16 50 | Female insert revos basic, 16-poles, rated current: 16A, rated voltage:500V, with tin-plated contacts |
| 71.350.1635.0 | Hood BAS GOT GG 16 M25 A0 | Hood revos basic made of aluminum, for single locking lever with cable gland M25 on the right side (IP54), low version, 16-poles |
| 71.350.1635.1 | Hood BAS GOT GG 16 M25 A1 | Hood revos basic made of aluminum, for single locking lever with threaded hole M25 on the right side, low version, 16-poles |
| 71.350.1635.2 | Hood BAS GOT GG 16 M25 A2 | Hood revos basic made of aluminum, for single locking lever with nozzleM25 on the right side, low version, 16-poles |
| 71.350.1635.3 | Hood BAS GOT GG 16 M25 A3 | Hood revos basic made of aluminum, for single locking lever with trumpet gland M25 on the right side (IP54), low version, 16-poles |
| 71.352.1635.0 | Hood BAS GOT GI 16 M25 A0 | Hood revos basic made of aluminum, for single locking lever with cable gland M25 on the top (IP54), low version, 16-poles |
| 71.352.1635.1 | Hood BAS GOT GI 16 M25 A1 | Hood revos basic made of aluminum, for single locking lever with threaded hole M25 on the top, low version, 16-poles |
| 71.352.1635.2 | Hood BAS GOT GI 16 M25 A2 | Hood revos basic made of aluminum, for single locking lever with nozzleM25 on the top, low version, 16-poles |
| 71.352.1635.3 | Hood BAS GOT GI 16 M25 A3 | Hood revos basic made of aluminum, for single locking lever with trumpet gland M25 on the top (IP54), low version, 16-poles |
| 71.353.1635.0 | Hood BAS GOT GG 16 M32 A0 | Hood revos basic made of aluminum, for single locking lever with cable gland M32 on the right side (IP54), low version, 16-poles |
| 71.353.1635.1 | Hood BAS GOT GG 16 M32 A1 | Hood revos basic made of aluminum, for single locking lever with threaded hole M32 on the right side, low version, 16-poles |
| 71.353.1635.2 | Hood BAS GOT GG 16 M32 A2 | Hood revos basic made of aluminum, for single locking lever with nozzleM32 on the right side, low version, 16-poles |
| 71.354.1635.0 | Hood BAS GOT GI 16 M32 A0 | Hood revos basic made of aluminum, for single locking lever with cable gland M32 on the top (IP54), low version, 16-poles |
| 71.354.1635.1 | Hood BAS GOT GI 16 M32 A1 | Hood revos basic made of aluminum, for single locking lever with threaded hole M32 on the top, low version, 16-poles |
| 71.354.1635.2 | Hood BAS GOT GI 16 M32 A2 | Hood revos basic made of aluminum, for single locking lever with nozzleM32 on the top, low version, 16-poles |
| 71.354.1635.3 | Hood BAS GOT GI 16 M32 A3 | Hood revos basic made of aluminum, for single locking lever with trumpet gland M32 on the top (IP54), low version, 16-poles |
| 71.372.1635.0 | Hood BAS GOT GL 16 M25 A0 | Hood revos basic made of aluminum, with single locking lever and cable gland M25 on the top - free cable connection (IP54), low version, 16-poles |
| 71.372.1635.1 | Hood BAS GOT GL 16 M25 A1 | Hood revos basic made of aluminum, with single locking lever and threaded hole M25 on the top - free cable connection, low version, 16-poles |
| 71.372.1635.3 | Hood BAS GOT GL 16 M25 A3 | Hood revos basic made of aluminum, with single locking lever and trumpet gland M25 on the top - free cable connection (IP54), low version, 16-poles |
| 71.450.1637.1 | Hood BAS GOM GG16 M25 B1 | Hood revos basic metal-series without coating, for single locking lever with threaded hole M25 on the right side, low version, 16-poles |
| 71.452.1637.1 | Hood BAS GOM GI16 M25 B1 | Hood revos basic metal-series without coating, for single locking lever with threaded hole M25 on the top, low version, 16-poles |

| | | |
|---------------|------------------------------|---|
| 76.350.4035.0 | Hood BAS GOT GG 40HM25 50 A0 | Hood revos basic made of aluminum, for single locking lever with cable gland M25 on the right side (IP54), low version, 40-poles |
| 76.350.4035.1 | Hood BAS GOT GG 40HM25 50 A1 | Hood revos basic made of aluminum, for single locking lever with threaded hole M25 on the right side, low version, 40-poles |
| 76.350.4035.2 | Hood BAS GOT GG 40HM25 50 A2 | Hood revos basic made of aluminum, for single locking lever with nozzleM25 on the right side, low version, 40-poles |
| 76.350.4035.3 | Hood BAS GOT GG 16H M25 A3 | Hood revos basic made of aluminum, for single locking lever with trumpet gland M25 on the right side (IP54), low version, 16-poles |
| 76.351.1635.1 | Hood BAS GOT GH 16H M20 A1 | Hood revos basic made of aluminum, for single locking lever with threaded hole M20 on the front, low version, 16-poles |
| 76.351.1635.3 | Hood BAS GOT GH 10H M20 A3 | Hood revos basic made of aluminum, for single locking lever with trumpet gland M20 on the front (IP54), low version, 10-poles |
| 76.352.4035.0 | Hood BAS GOT GI 40HM25 50 A0 | Hood revos basic made of aluminum, for single locking lever with cable gland M25 on the top (IP54), low version, 40-poles |
| 76.352.4035.1 | Hood BAS GOT GI 16HM25 A1 | Hood revos basic made of aluminum, for single locking lever with threaded hole M25 on the top, low version, 16-poles |
| 76.352.4035.3 | Hood BAS GOT GI 16H M25 A3 | Hood revos basic made of aluminum, for single locking lever with trumpet gland M25 on the top (IP54), low version, 16-poles |
| 76.353.4035.0 | Hood BAS GOT GG 40HM32 50 A0 | Hood revos basic made of aluminum, for single locking lever with cable gland M32 on the right side (IP54), low version, 40-poles |
| 76.353.4035.1 | Hood BAS GOT GG 16HM32 A1 | Hood revos basic made of aluminum, for single locking lever with threaded hole M32 on the right side, low version, 16-poles |
| 76.353.4035.2 | Hood BAS GOT GG 40HM32 50 A2 | Hood revos basic made of aluminum, for single locking lever with nozzleM32 on the right side, low version, 40-poles |
| 76.353.4035.3 | Hood BAS GOT GG 16H M32 A3 | Hood revos basic made of aluminum, for single locking lever with trumpet gland M32 on the right side (IP54), low version, 16-poles |
| 76.354.4035.0 | Hood BAS GOT GI 40HM32 50 A0 | Hood revos basic made of aluminum, for single locking lever with cable gland M32 on the top (IP54), low version, 40-poles |
| 76.354.4035.1 | Hood BAS GOT GI 40HM32 50 A1 | Hood revos basic made of aluminum, for single locking lever with threaded hole M32 on the top, low version, 40-poles |
| 76.354.4035.3 | Hood BAS GOT GI 16H M32 A3 | Hood revos basic made of aluminum, for single locking lever with trumpet gland M32 on the top (IP54), low version, 16-poles |
| 76.360.4035.0 | Hood BAS GOT GG 16H M40 A0 | Hood revos basic made of aluminum, for single locking lever with cable gland M40 on the right side (IP54), low version, 16-poles |
| 76.360.4035.1 | Hood BAS GOT GG 40HM40 50 A1 | Hood revos basic made of aluminum, for single locking lever with threaded hole M40 on the right side, low version, 40-poles |
| 76.362.4035.1 | Hood BAS GOT GI 40HM40 50 A1 | Hood revos basic made of aluminum, for single locking lever with threaded hole M40 on the top, low version, 40-poles |
| 76.374.4035.0 | Hood BAS GOT GL 40HM32 50 A0 | Connectors for free cable connections revos basic made of aluminum, with single locking lever and cable gland M32 on the top - free cable connection (IP54), 40-poles |
| 71.320.1628.0 | Bottom BAS GUT GK 16 A | Bottom-base revos basic made of aluminum, with single locking lever, open, low version, 16-poles |
| 71.325.1628.0 | Bottom BAS GUT GP 16 A | Bottom-base revos basic made of aluminum, with single locking lever, open, low version, 16-poles |
| 71.330.1635.0 | Bottom BAS GUT GL 16 M25 A0 | Bottom-base revos basic made of aluminum, with single locking lever and cable gland M25 on the right and left side (IP54), low version, 16-polig |
| 71.330.1635.1 | Bottom BAS GUT GL 16 M25 A1 | Bottom-base revos basic made of aluminum, with single locking lever and threaded hole M25 on the right and left side, low version, 16-polig |
| 71.331.1635.0 | Bottom BAS GUT GM 16 M25 A0 | Bottom-base revos basic made of aluminum, with single locking lever and cable gland M25 on the left side (IP54), low version, 16-polig |
| 71.331.1635.1 | Bottom BAS GUT GM 16 M25 A1 | Bottom-base revos basic made of aluminum, with single locking lever and threaded hole M25 on the left side, low version, 16-polig |
| 71.333.1635.0 | Bottom BAS GUT GO 16 M25 A0 | Bottom-base revos basic made of aluminum, with single locking lever and cable gland M25 on the bottom (IP54), low version, 16-polig |

| | | |
|---------------|--------------------------------|--|
| 71.333.1635.1 | Bottom BAS GUT GO 16 M25 A1 | Bottom-base revos basic made of aluminum, with single locking lever and threaded hole M25 on the bottom, low version, 16-polig |
| 71.340.1635.0 | Bottom BAS GUT GR 16 M25 A0 | Bottom-base revos basic made of aluminum, with single locking lever and cable gland M25 on the right and the left side, with protective cover (IP54), low version, 16-polig |
| 71.340.1635.1 | Bottom BAS GUT GR 16 M25 A1 | Bottom-base revos basic made of aluminum, with single locking lever and threaded hole M25 on the right and the left side, with protective cover, low version, 16-polig |
| 71.341.1635.0 | Bottom BAS GUT GS 16 M25 A0 | Bottom-base revos basic made of aluminum, with single locking lever and cable gland M25 on the left side, with protective cover (IP54), low version, 16-polig |
| 71.341.1635.1 | Bottom BAS GUT GS 16 M25 A1 | Bottom-base revos basic made of aluminum, with single locking lever and threaded hole M25 on the left side, with protective cover, low version, 16-polig |
| 71.342.1635.0 | Bottom BAS GUT GT 16 M25 A0 | Bottom-base revos basic made of aluminum, with single locking lever and cable gland M25 on the right side, with protective cover (IP54), low version, 16-polig |
| 71.342.1635.1 | Bottom BAS GUT GT 16 M25 A1 | Bottom-base revos basic made of aluminum, with single locking lever and threaded hole M25 on the right side, with protective cover, low version, 16-polig |
| 71.343.1635.0 | Bottom BAS GUT GU 16 M25 A0 | Bottom-base revos basic made of aluminum, with single locking lever and cable gland M25 on the bottom, with protective cover (IP54), low version, 16-polig |
| 71.343.1635.1 | Bottom BAS GUT GU 16 M25 A1 | Bottom-base revos basic made of aluminum, with single locking lever and threaded hole M25 on the bottom, with protective cover, low version, 16-polig |
| 71.420.1637.0 | Bottom BAS GUM GK 16 B | Bottom-base revos basic metal-series without coating, open, low version, 16-poles |
| 71.425.1637.0 | Bottom BAS GUM GP 16 B | Bottom-base revos basic metal-series without coating, with single locking lever and protective cover, low version, 16-poles |
| 71.430.1637.1 | Bottom BAS GUM GL 16 M25 B1 | Bottom-base revos basic metal-series without coating, with single locking lever and threaded hole M25 on the right and left side, low version, 16-polig |
| 71.431.1637.1 | Bottom BAS GUM GM 16 M25 B1 | Bottom-base revos basic metal-series without coating, with single locking lever and threaded hole M25 on the left side, low version, 16-polig |
| 71.440.1637.1 | Bottom BAS GUM GR 16 M25 B1 | Bottom-base revos basic metal-series without coating, with single locking lever and threaded hole M25 on the right and the left side, with protective cover, low version, 16-polig |
| 71.441.1637.1 | Bottom BAS GUM GS 16 M25 B1 | Bottom-base revos basic metal-series without coating, with single locking lever and threaded hole M25 on the left side, with protective cover, low version, 16-polig |
| 76.330.4035.0 | Bottom BAS GUT GL 40HM25 50 A0 | Bottom-base revos basic made of aluminum, with single locking lever and cable gland M25 on the right and left side (IP54), low version, 40-polig |
| 76.330.4035.1 | Bottom BAS GUT GL 40HM25 50 A1 | Bottom-base revos basic made of aluminum, with single locking lever and threaded hole M25 on the right and left side, low version, 40-polig |
| 76.331.4035.0 | Bottom BAS GUT GM 40HM25 50 A0 | Bottom-base revos basic made of aluminum, with single locking lever and cable gland M25 on the left side (IP54), low version, 40-polig |
| 76.331.4035.1 | Bottom BAS GUT GM 40HM25 50 A1 | Bottom-base revos basic made of aluminum, with single locking lever and threaded hole M25 on the left side, low version, 40-polig |
| 76.333.4035.0 | Bottom BAS GUT GO 40HM25 50 A0 | Bottom-base revos basic made of aluminum, with single locking lever and cable gland M25 on the bottom (IP54), low version, 40-polig |
| 76.333.4035.1 | Bottom BAS GUT GO 40HM25 50 A1 | Bottom-base revos basic made of aluminum, with single locking lever and threaded hole M25 on the bottom, low version, 40-polig |

| | | |
|---------------|--------------------------------|---|
| 76.334.4035.1 | Bottom BAS GUT GL 40HM32 50 A1 | Bottom-base revos basic made of aluminum, with single locking lever and threaded hole M32 on the right and left side, low version, 40-polig |
| 76.335.4035.0 | Bottom BAS GUT GM 40HM32 50 A0 | Bottom-base revos basic made of aluminum, with single locking lever and cable gland M32 on the left side (IP54), low version, 40-polig |
| 76.335.4035.1 | Bottom BAS GUT GM 40HM32 50 A1 | Bottom-base revos basic made of aluminum, with single locking lever and threaded hole M32 on the left side, low version, 40-polig |
| 76.337.4035.1 | Bottom BAS GUT GO 40HM32 50 A1 | Bottom-base revos basic made of aluminum, with single locking lever and threaded hole M32 on the bottom, low version, 40-polig |
| 76.340.4035.0 | Bottom BAS GUT GR 40HM25 50 A0 | Bottom-base revos basic made of aluminum, with single locking lever and cable gland M25 on the right and the left side, with protective cover (IP54), low version, 40-polig |
| 76.340.4035.1 | Bottom BAS GUT GR 40HM25 50 A1 | Bottom-base revos basic made of aluminum, with single locking lever and threaded hole M25 on the right and the left side, with protective cover, low version, 40-polig |
| 76.341.4035.0 | Bottom BAS GUT GS 40HM25 50 A0 | Bottom-base revos basic made of aluminum, with single locking lever and cable gland M25 on the left side, with protective cover (IP54), low version, 40-polig |
| 76.341.4035.1 | Bottom BAS GUT GS 40HM25 50 A1 | Bottom-base revos basic made of aluminum, with single locking lever and threaded hole M25 on the left side, with protective cover, low version, 40-polig |
| 76.344.4035.0 | Bottom BAS GUT GR 40HM32 50 A0 | Bottom-base revos basic made of aluminum, with single locking lever and cable gland M32 on the right and the left side, with protective cover (IP54), low version, 40-polig |
| 76.344.4035.1 | Bottom BAS GUT GR 40HM32 50 A1 | Bottom-base revos basic made of aluminum, with single locking lever and threaded hole M32 on the right and the left side, with protective cover, low version, 40-polig |
| 76.345.4035.0 | Bottom BAS GUT GS 16HM32 A0 | Bottom-base revos basic made of aluminum, with single locking lever and cable gland M32 on the left side, with protective cover (IP54), low version, 16-polig |
| 76.345.4035.1 | Bottom BAS GUT GS 40HM32 50 A1 | Bottom-base revos basic made of aluminum, with single locking lever and threaded hole M32 on the left side, with protective cover, low version, 40-polig |
| 76.346.4035.0 | Bottom BAS GUT GT 40HM32 50 A0 | Bottom-base revos basic made of aluminum, with single locking lever and cable gland M32 on the right side, with protective cover (IP54), low version, 40-polig |
| 76.346.4035.1 | Bottom BAS GUT GT 40HM32 50 A1 | Bottom-base revos basic made of aluminum, with single locking lever and threaded hole M32 on the right side, with protective cover, low version, 40-polig |
| 76.347.4035.0 | Bottom BAS GUT GU 40HM32 50 A0 | Bottom-base revos basic made of aluminum, with single locking lever and cable gland M32 on the bottom, with protective cover (IP54), low version, 40-polig |
| 76.347.4035.1 | Bottom BAS GUT GU 40HM32 50 A1 | Bottom-base revos basic made of aluminum, with single locking lever and threaded hole M32 on the bottom, with protective cover, low version, 40-polig |
| 70.350.1635.0 | Hood BAS GOT GA 16 M25 A0 | Hood revos basic made of aluminum, for double locking lever or screw cap with cable gland M25 on the right side (IP54), low version, 16-poles |
| 70.350.1635.1 | Hood BAS GOT GA 16 M25 A1 | Hood revos basic made of aluminum, for double locking lever or screw cap with threaded hole M25 on the right side, low version, 16-poles |
| 70.350.1635.2 | Hood BAS GOT GA 16 M25 A2 | Hood revos basic made of aluminum, for double locking lever or screw cap with nozzle M25 on the right side, low version, 16-poles |
| 70.350.1635.3 | Hood BAS GOT GA 16 M25 A3 | Hood revos basic made of aluminum, for double locking lever or screw cap with trumpet gland M25 on the right side (IP54), low version, 16-poles |

| | | |
|---------------|---------------------------|--|
| 70.352.1635.0 | Hood BAS GOT GC 16 M25 A0 | Hood revos basic made of aluminum, for double locking lever or. screw cap with cable gland M25 on the top (IP54), low version, 16-poles |
| 70.352.1635.1 | Hood BAS GOT GC 16 M25 A1 | Hood revos basic made of aluminum, for double locking lever or. screw cap with threaded hole M25 on the top, low version, 16-poles |
| 70.352.1635.2 | Hood BAS GOT GC 16 M25 A2 | Hood revos basic made of aluminum, for double locking lever or. screw cap with nozzle M25 on the top, low version, 16-poles |
| 70.352.1635.3 | Hood BAS GOT GC 16 M25 A3 | Hood revos basic made of aluminum, for double locking lever or. screw cap with trumpet gland M25 on the top (IP54), low version, 16-poles |
| 70.353.1635.0 | Hood BAS GOT GA 16 M32 A0 | Hood revos basic made of aluminum, for double locking lever or. screw cap with cable gland M32 on the right side (IP54), low version, 16-poles |
| 70.353.1635.1 | Hood BAS GOT GA 16 M32 A1 | Hood revos basic made of aluminum, for double locking lever or. screw cap with threaded hole M32 on the right side, low version, 16-poles |
| 70.353.1635.2 | Hood BAS GOT GA 16 M32 A2 | Hood revos basic made of aluminum, for double locking lever or. screw cap with nozzle M32 on the right side, low version, 16-poles |
| 70.353.1635.3 | Hood BAS GOT GA 16 M32 A3 | Hood revos basic made of aluminum, for double locking lever or. screw cap with trumpet gland M32 on the right side (IP54), low version, 16-poles |
| 70.354.1635.0 | Hood BAS GOT GC 16 M32 A0 | Hood revos basic made of aluminum, for double locking lever or. screw cap with cable gland M32 on the top (IP54), low version, 16-poles |
| 70.354.1635.1 | Hood BAS GOT GC 16 M32 A1 | Hood revos basic made of aluminum, for double locking lever or. screw cap with threaded hole M32 on the top, low version, 16-poles |
| 70.354.1635.3 | Hood BAS GOT GC 16 M32 A3 | Hood revos basic made of aluminum, for double locking lever or. screw cap with trumpet gland M32 on the top (IP54), low version, 16-poles |
| 70.355.1635.0 | Hood BAS GOT GD 16 M25 A0 | Hood revos basic made of aluminum, with double locking lever and cable gland M25 on the right side (IP54), low version, 16-poles |
| 70.355.1635.1 | Hood BAS GOT GD 16 M25 A1 | Hood revos basic made of aluminum, with double locking lever and threaded hole M25 on the right side, low version, 16-poles |
| 70.355.1635.2 | Hood BAS GOT GD 16 M25 A2 | Hood revos basic made of aluminum, with double locking lever and nozzle M25 on the right side, low version, 16-poles |
| 70.355.1635.3 | Hood BAS GOT GD 16 M25 A3 | Hood revos basic made of aluminum, with double locking lever and trumpet gland M25 on the right side (IP54), low version, 16-poles |
| 70.357.1635.0 | Hood BAS GOT GF 16 M25 A0 | Hood revos basic made of aluminum, with double locking lever and cable gland M25 on the top (IP54), low version, 16-poles |
| 70.357.1635.1 | Hood BAS GOT GF 16 M25 A1 | Hood revos basic made of aluminum, with double locking lever and threaded hole M25 on the top, low version, 16-poles |
| 70.357.1635.3 | Hood BAS GOT GF 16 M25 A3 | Hood revos basic made of aluminum, with double locking lever and trumpet gland M25 on the top (IP54), low version, 16-poles |
| 70.358.1635.0 | Hood BAS GOT GD 16 M32 A0 | Hood revos basic made of aluminum, with double locking lever and cable gland M32 on the right side (IP54), low version, 16-poles |
| 70.358.1635.1 | Hood BAS GOT GD 16 M32 A1 | Hood revos basic made of aluminum, with double locking lever and threaded hole M32 on the right side, low version, 16-poles |
| 70.358.1635.3 | Hood BAS GOT GD 16 M32 A3 | Hood revos basic made of aluminum, with double locking lever and trumpet gland M32 on the right side (IP54), low version, 16-poles |
| 70.359.1635.0 | Hood BAS GOT GF 16 M32 A0 | Hood revos basic made of aluminum, with double locking lever and cable gland M32 on the top (IP54), low version, 16-poles |
| 70.359.1635.1 | Hood BAS GOT GF 16 M32 A1 | Hood revos basic made of aluminum, with double locking lever and threaded hole M32 on the top, low version, 16-poles |
| 70.359.1635.3 | Hood BAS GOT GF 16 M32 A3 | Hood revos basic made of aluminum, with double locking lever and trumpet gland M32 on the top (IP54), low version, 16-poles |

| | | |
|---------------|------------------------------|---|
| 70.372.1635.0 | Hood BAS GOT GK 16 M25 A0 | Hood revos basic made of aluminum, with double locking lever and cable gland M25 on the top - free cable connection (IP54), low version, 16-poles |
| 70.372.1635.1 | Hood BAS GOT GK 16 M25 A1 | Hood revos basic made of aluminum, with double locking lever and threaded hole M25 on the top - free cable connection, low version, 16-poles |
| 70.372.1635.3 | Hood BAS GOT GK 16 M25 A3 | Hood revos basic made of aluminum, with double locking lever and trumpet gland M25 on the top - free cable connection (IP54), low version, 16-poles |
| 72.250.1635.2 | Hood POW GOT GA 16 M40 69 A2 | Hood revos basic made of aluminum, for double locking lever or. screw cap with nozzle M40 on the right side, low version, 16-poles |
| 73.350.4035.0 | Hood BAS GOT GA 16HM25 50 A0 | Hood revos basic made of aluminum, for double locking lever or. screw cap with cable gland M25 on the right side (IP54), low version, 16-poles |
| 73.350.4035.1 | Hood BAS GOT GA 16HM25 50 A1 | Hood revos basic made of aluminum, for double locking lever or. screw cap with threaded hole M25 on the right side, low version, 16-poles |
| 73.350.4035.2 | Hood BAS GOT GA 16HM25 50 A2 | Hood revos basic made of aluminum, for double locking lever or. screw cap with nozzle M25 on the right side, low version, 16-poles |
| 73.350.4035.3 | Hood BAS GOT GA 16H M25 A3 | Hood revos basic made of aluminum, for double locking lever or. screw cap with trumpet gland M25 on the right side (IP54), low version, 16-poles |
| 73.351.1635.1 | Hood BAS GOT GB 16H M25 A1 | Hood revos basic made of aluminum, for double locking lever and threaded hole M25 on the front, low version, 16-poles |
| 73.351.1635.3 | Hood BAS GOT GB 16H M25 A3 | Hood revos basic made of aluminum, for double locking lever and trumpet gland M25 on the front (IP54), low version, 16-poles |
| 73.352.4035.0 | Hood BAS GOT GC 16HM25 50 A0 | Hood revos basic made of aluminum, for double locking lever or. screw cap with cable gland M25 on the top (IP54), low version, 16-poles |
| 73.352.4035.1 | Hood BAS GOT GC 16HM25 50 A1 | Hood revos basic made of aluminum, for double locking lever or. screw cap with threaded hole M25 on the top, low version, 16-poles |
| 73.352.4035.2 | Hood BAS GOT GC 16HM25 50 A2 | Hood revos basic made of aluminum, for double locking lever or. screw cap with nozzle M25 on the top, low version, 16-poles |
| 73.352.4035.3 | Hood BAS GOT GC 16H M25 A3 | Hood revos basic made of aluminum, for double locking lever or. screw cap with trumpet gland M25 on the top (IP54), low version, 16-poles |
| 73.353.4035.0 | Hood BAS GOT GA 40HM32 50 A0 | Hood revos basic made of aluminum, for double locking lever or. screw cap with cable gland M32 on the right side (IP54), high version, 40-poles |
| 73.353.4035.1 | Hood BAS GOT GA 40HM32 50 A1 | Hood revos basic made of aluminum, for double locking lever or. screw cap with threaded hole M32 on the right side, low version, 40-poles |
| 73.353.4035.2 | Hood BAS GOT GA 40HM32 50 A2 | Hood revos basic made of aluminum, for double locking lever or. screw cap with nozzle M32 on the right side, low version, 40-poles |
| 73.353.4035.3 | Hood BAS GOT GA 16HM32 A3 | Hood revos basic made of aluminum, for double locking lever or. screw cap with trumpet gland M32 on the right side (IP54), low version, 16-poles |
| 73.354.4035.0 | Hood BAS GOT GC 16HM32 50 A0 | Hood revos basic made of aluminum, for double locking lever or. screw cap with cable gland M32 on the top (IP54), low version, 16-poles |
| 73.354.4035.1 | Hood BAS GOT GC 16HM32 50 A1 | Hood revos basic made of aluminum, for double locking lever or. screw cap with threaded hole M32 on the top, low version, 16-poles |
| 73.354.4035.2 | Hood BAS GOT GC 16HM32 50 A2 | Hood revos basic made of aluminum, for double locking lever or. screw cap with nozzle M32 on the top, low version, 16-poles |
| 73.354.4035.3 | Hood BAS GOT GC 16HM32 A2 | Hood revos basic made of aluminum, for double locking lever or. screw cap with nozzle M32 on the top, low version, 16-poles |

| | | |
|---------------|------------------------------|---|
| 73.355.4035.1 | Hood BAS GOT GD 16HM25 50 A1 | Hood revos basic made of aluminum, with double locking lever and threaded hole M25 on the right side, low version, 16-poles |
| 73.357.4035.0 | Hood BAS GOT GF 16HM25 50 A0 | Hood revos basic made of aluminum, with double locking lever and cable gland M25 on the top (IP54), low version, 16-poles |
| 73.357.4035.1 | Hood BAS GOT GF 16HM25 50 A1 | Hood revos basic made of aluminum, with double locking lever and threaded hole M25 on the top, low version, 16-poles |
| 73.357.4035.2 | Hood BAS GOT GF 16HM25 50 A2 | Hood revos basic made of aluminum, with double locking lever and nozzleM25 on the top, low version, 16-poles |
| 73.358.4035.0 | Hood BAS GOT GD 16HM32 50 A0 | Hood revos basic made of aluminum, with double locking lever and cable gland M32 on the right side (IP54), low version, 16-poles |
| 73.358.4035.1 | Hood BAS GOT GD 16HM32 50 A1 | Hood revos basic made of aluminum, with double locking lever and threaded hole M32 on the right side, low version, 16-poles |
| 73.359.4035.0 | Hood BAS GOT GF 16HM32 50 A0 | Hood revos basic made of aluminum, with double locking lever and cable gland M32 on the top (IP54), low version, 16-poles |
| 73.359.4035.1 | Hood BAS GOT GF 16HM32 50 A1 | Hood revos basic made of aluminum, with double locking lever and threaded hole M32 on the top, high version, 16-poles |
| 73.359.4035.2 | Hood BAS GOT GF 16HM32 50 A2 | Hood revos basic made of aluminum, with double locking lever and nozzleM32 on the top, low version, 16-poles |
| 73.359.4035.3 | Hood BAS GOT GF 16HM32 A3 | Hood revos basic made of aluminum, with double locking lever and trumpet gland M32 on the top (IP54), low version, 16-poles |
| 73.360.4035.0 | Hood BAS GOT GA 16HM40 A0 | Hood revos basic made of aluminum, for double locking lever or screw cap with cable gland M40 on the right side (IP54), low version, 16-poles |
| 73.360.4035.1 | Hood BAS GOT GA 16HM40 50 A1 | Hood revos basic made of aluminum, for double locking lever or screw cap with threaded hole M40 on the right side, low version, 16-poles |
| 73.362.4035.1 | Hood BAS GOT GC 16HM40 50 A1 | Hood revos basic made of aluminum, for double locking lever or screw cap with threaded hole M40 on the top, low version, 16-poles |
| 70.320.1628.0 | Bottom BAS GUT GA 16 A | Bottom-base revos basic made of aluminum, with double locking lever or screw cap, low version, 16-poles |
| 70.325.1628.0 | Bottom BAS GUT GE 16 A | Bottom-base revos basic made of aluminum, for double locking lever and protective cover, open, low version, 16-poles |
| 70.330.1635.0 | Bottom BAS GUT GB 16 M25 A0 | Bottom-base revos basic made of aluminum, with double locking lever or screw cap with cable gland M25 on the right and left side (IP54), low version, 16-polig |
| 70.330.1635.1 | Bottom BAS GUT GB 16 M25 A1 | Bottom-base revos basic made of aluminum, with double locking lever or screw cap with threaded hole M25 on the right and left side, low version, 16-polig |
| 70.331.1635.0 | Bottom BAS GUT GC 16 M25 A0 | Bottom-base revos basic made of aluminum, with double locking lever or screw cap with cable gland M25 on the left side (IP54), low version, 16-polig |
| 70.331.1635.1 | Bottom BAS GUT GC 16 M25 A1 | Bottom-base revos basic made of aluminum, with double locking lever or screw cap with threaded hole M25 on the left side, low version, 16-polig |
| 70.333.1635.0 | Bottom BAS GUT GD 16 M25 A0 | Bottom-base revos basic made of aluminum, with double locking lever or screw cap with cable gland M25 on the right side (IP54), low version, 16-polig |
| 70.333.1635.1 | Bottom BAS GUT GD 16 M25 A1 | Bottom-base revos basic made of aluminum, with double locking lever or screw cap with threaded hole M25 on the right side, low version, 16-polig |
| 70.340.1635.0 | Bottom BAS GUT GF 16 M25 A0 | Bottom-base revos basic made of aluminum, for double locking lever with cable gland M25 on the left and right side, with protective cover (IP54), low version, 16-polig |
| 70.340.1635.1 | Bottom BAS GUT GF 16 M25 A1 | Bottom-base revos basic made of aluminum, for double locking lever with threaded hole M25 on the left and right side, with protective cover, low version, 16-polig |

| | | |
|---------------|--------------------------------|--|
| 70.341.1635.0 | Bottom BAS GUT GG 16 M25 A0 | Bottom-base revos basic made of aluminum, with double locking lever and cable gland M25 on the left side, with protective cover (IP54), low version, 16-polig |
| 70.341.1635.1 | Bottom BAS GUT GG 16 M25 A1 | Bottom-base revos basic made of aluminum, with double locking lever and threaded hole M25 on the left side, with protective cover, low version, 16-polig |
| 70.342.1635.0 | Bottom BAS GUT GH 16 M25 A0 | Bottom-base revos basic made of aluminum, with double locking lever and cable gland M25 on the right side, with protective cover (IP54), low version, 16-polig |
| 70.342.1635.1 | Bottom BAS GUT GH 16 M25 A1 | Bottom-base revos basic made of aluminum, with double locking lever and threaded hole M25 on the right side, with protective cover, low version, 16-polig |
| 70.343.1635.0 | Bottom BAS GUT GI 16 M25 A0 | Bottom-base revos basic made of aluminum, with double locking lever and cable gland M25 on the bottom, with protective cover (IP54), low version, 16-polig |
| 70.343.1635.1 | Bottom BAS GUT GI 16 M25 A1 | Bottom-base revos basic made of aluminum, with double locking lever and threaded hole M25 on the bottom, with protective cover, low version, 16-polig |
| 73.330.4035.0 | Bottom BAS GUT GB 16HM25 50 A0 | Bottom-base revos basic made of aluminum, with double locking lever or screw cap with cable gland M25 on the right and left side (IP54), low version, 16-polig |
| 73.330.4035.1 | Bottom BAS GUT GB 16HM25 50 A1 | Bottom-base revos basic made of aluminum, with double locking lever or screw cap with threaded hole M25 on the right and left side, low version, 16-polig |
| 73.331.4035.0 | Bottom BAS GUT GC 16HM25 50 A0 | Bottom-base revos basic made of aluminum, with double locking lever or screw cap with cable gland M25 on the left side (IP54), low version, 16-polig |
| 73.331.4035.1 | Bottom BAS GUT GC 16M25 50 A1 | Bottom-base revos basic made of aluminum, with double locking lever or screw cap with threaded hole M25 on the left side, low version, 16-polig |
| 73.333.4035.0 | Bottom BAS GUT GD 16HM25 50 A0 | Bottom-base revos basic made of aluminum, with double locking lever or screw cap with cable gland M25 on the right side (IP54), low version, 16-polig |
| 73.333.4035.1 | Bottom BAS GUT GD 16HM25 50 A1 | Bottom-base revos basic made of aluminum, with double locking lever or screw cap with threaded hole M25 on the right side, low version, 16-polig |
| 73.334.4035.0 | Bottom BAS GUT GB 16HM32 50 A0 | Bottom-base revos basic made of aluminum, with double locking lever or screw cap with cable gland M32 on the right and left side (IP54), low version, 16-polig |
| 73.334.4035.1 | Bottom BAS GUT GB 16HM32 50 A1 | Bottom-base revos basic made of aluminum, with double locking lever or screw cap with threaded hole M32 on the right and left side, low version, 16-polig |
| 73.335.4035.0 | Bottom BAS GUT GC 16HM32 50 A0 | Bottom-base revos basic made of aluminum, with double locking lever or screw cap with cable gland M32 on the left side (IP54), high version, 6-poles |
| 73.335.4035.1 | Bottom BAS GUT GC 16HM32 50 A1 | Bottom-base revos basic made of aluminum, with double locking lever or screw cap with threaded hole M32 on the left side, low version, 16-polig |
| 73.337.4035.0 | Bottom BAS GUT GD 16HM32 50 A0 | Bottom-base revos basic made of aluminum, with double locking lever or screw cap with cable gland M32 on the right side (IP54), low version, 16-polig |
| 73.337.4035.1 | Bottom BAS GUT GD 16HM32 50 A1 | Bottom-base revos basic made of aluminum, with double locking lever or screw cap with threaded hole M32 on the right side, low version, 16-polig |
| 73.338.4035.1 | Bottom BAS GUT GB 16H M40 A1 | Bottom-base revos basic made of aluminum, with double locking lever or screw cap with threaded hole M40 on the right and left side, low version, 16-polig |

| | | |
|---------------|--|---|
| 73.339.4035.1 | Bottom BAS GUT GC 16H M40 A1 | Bottom-base revos basic made of aluminum, with double locking lever or.screw cap with threaded hole M40 on the left side, low version, 16-polig |
| 73.340.4035.0 | Bottom BAS GUT GB 16H M40 A1 | Bottom-base revos basic made of aluminum, with double locking lever or.screw cap with threaded hole M40 on the right and left side, low version, 16-polig |
| 73.340.4035.1 | Bottom BAS GUT GF 16HM25 50 A1 | Bottom-base revos basic made of aluminum, for double locking lever with threaded hole M25 on the left and right side, with protective cover, low version, 16-polig |
| 73.341.4035.0 | Bottom BAS GUT GC 16H M40 A1 | Bottom-base revos basic made of aluminum, with double locking lever or.screw cap with threaded hole M40 on the left side, low version, 16-polig |
| 73.341.4035.1 | Bottom BAS GUT GG 16HM25 50 A1 | Bottom-base revos basic made of aluminum, with double locking lever and threaded hole M25 on the left side, with protective cover, low version, 16-polig |
| 73.342.4035.1 | Bottom BAS GUT GH 16HM25 50 A1 | Bottom-base revos basic made of aluminum, with double locking lever and threaded hole M25 on the right side, with protective cover, low version, 16-polig |
| 73.344.4035.0 | Bottom BAS GUT GF 16HM32 50 A0 | Bottom-base revos basic made of aluminum, for double locking lever with cable gland M32 on the left and right side, with protective cover (IP54), low version, 16-polig |
| 73.344.4035.1 | Bottom BAS GUT GF 16HM32 50 A1 | Bottom-base revos basic made of aluminum, for double locking lever with threaded hole M32 on the left and right side, with protective cover, high version, 16-polig |
| 73.345.4035.0 | Bottom BAS GUT GG 16HM32 50 A0 | Bottom-base revos basic made of aluminum, with double locking lever and cable gland M32 on the left side, with protective cover (IP54), low version, 16-polig |
| 73.345.4035.1 | Bottom BAS GUT GG 16HM32 50 A1 | Bottom-base revos basic made of aluminum, with double locking lever and threaded hole M32 on the left side, with protective cover, low version, 16-polig |
| 73.346.4035.0 | Bottom BAS GUT GH 16HM32 50 A0 | Bottom-base revos basic made of aluminum, with double locking lever and cable gland M32 on the right side, with protective cover (IP54), low version, 16-polig |
| 73.346.4035.1 | Bottom BAS GUT GH 16HM32 50 A1 | Bottom-base revos basic made of aluminum, with double locking lever and threaded hole M32 on the right side, with protective cover, low version, 16-polig |
| 73.347.4035.0 | Bottom BAS GUT GI 16HM32 50 A0 | Bottom-base revos basic made of aluminum, with double locking lever and cable gland M32 on the bottom, with protective cover (IP54), low version, 16-polig |
| 73.347.4035.1 | Bottom BAS GUT GI 40HM32 50 A1 | Bottom-base revos basic made of aluminum, with double locking lever and threaded hole M32 on the bottom, with protective cover, low version, 40-polig |
| 70.405.1653.0 | Female insert BAS BUP 16 2,5 50 AG | Female insert revos basic, 16-poles, rated current: 16A, rated voltage:500V, with silver-plated contacts |
| 70.100.1653.3 | Multipole adapter BAS BAS LL 16 4,0 50 | Multipole adapter revos BASIC 500V/16A screw connection 16 pole + ground, long design, female insert, ground left |
| 70.100.1653.4 | Multipole adapter BAS BAS KL 16 4,0 50 | Multipole adapter revos BASIC 500V/16A screw connection 16 pole + ground, short design, female insert, ground left |
| 70.105.1653.3 | Multipole adapter BAS BAS LR 16 4,0 50 | Multipole adapter revos BASIC 500V/16A screw connection 16 pole + ground, long design, female insert, ground right |
| 70.105.1653.4 | Multipole adapter BAS BAS KR 16 4,0 50 | Multipole adapter revos BASIC 500V/16A screw connection 16 pole + ground, short design, female insert, ground right |
| 70.100.2453.3 | Multipole adapter BAS BAS LL 24 4,0 50 | Multipole adapter revos BASIC 500V/16A screw connection 24 pole + ground, long design, female insert, ground left |
| 70.100.2453.4 | Multipole adapter BAS BAS KL 24 4,0 50 | Multipole adapter revos BASIC 500V/16A screw connection 24 pole + ground, short design, female insert, ground left |

| | | |
|---------------|--|--|
| 70.105.2453.3 | Multipole adapter BAS BAS LR 24 4,0 50 | Multipole adapter revos BASIC 500V/16A screw connection 24 pole + ground, long design, female insert, ground right |
| 70.105.2453.4 | Multipole adapter BAS BAS KR 24 4,0 50 | Multipole adapter revos BASIC 500V/16A screw connection 24 pole + ground, short design, female insert, ground right |
| 71.940.2453.4 | Multipole adapter set BAS GAESNLB24 4,0 50 | Multipole adapter revos BASIC 500V/16A with base, screw connection 24 pole + ground, short design, female insert, ground left, single locking lever |
| 71.945.2453.3 | Multipole adapter set BAS GAESHRB24 4,0 50 | Multipole adapter revos BASIC 500V/16A with base, screw connection 24 pole + ground, long design, female insert, ground right, single locking lever |
| 70.940.2453.3 | Multipole adapter set BAS GAZSHLB24 4,0 50 | Multipole adapter revos BASIC 500V/16A with base, screw connection 24 pole + ground, long design, female insert, ground left, double locking lever |
| 70.940.2453.4 | Multipole adapter set BAS GAZSNLB24 4,0 50 | Multipole adapter revos BASIC 500V/16A with base, screw connection 24 pole + ground, short design, female insert, ground left, double locking lever |
| 70.945.2453.3 | Multipole adapter set BAS GAZSHRB24 4,0 50 | Multipole adapter revos BASIC 500V/16A with base, screw connection 24 pole + ground, long design, female insert, ground right, double locking lever |
| 70.945.2453.4 | Multipole adapter set BAS GAZSNRB24 4,0 50 | Multipole adapter revos BASIC 500V/16A with base, screw connection 24 pole + ground, short design, female insert, ground right, double locking lever |
| 70.101.1653.0 | Multipole adapter BAS BAF KL 16 2,5 50 | Multipole adapter revos BASIC 500V/16A spring clamp connection 16 pole + ground, short design, female insert, ground left |
| 70.106.1653.0 | Multipole adapter BAS BAF KR 16 2,5 50 | Multipole adapter revos BASIC 500V/16A spring clamp connection 16 pole + ground, short design, female insert, ground right |
| 70.300.1602.0 | Female insert BAS BUS 16 2,5 50 AG | Female insert revos basic, 16-poles, rated current: 16A, rated voltage:500V, with silver-plated contacts |
| 70.300.1640.0 | Female insert BAS BUS 16 2,5 50 | Female insert revos basic, 16-poles, rated current: 16A, rated voltage:500V, with tin-plated contacts |
| 70.301.1640.0 | Female insert BAS BUS 16 2,5 50 AU | Female insert revos basic, 16-poles, rated current: 16A, rated voltage:500V, with gold-plated contacts |
| 70.302.1640.0 | Female insert BAS BUS OD 16 2,5 50 | Female insert revos basic, 16-poles, rated current: 16A, rated voltage:500V, with tin-plated contacts |

1


2

3



A

16-polig/16-pole

○ These dimensions will be especially checked at delivery
 ○ Only inspection dimensions
 ▭ With IE marked dimensions are only valid for internal use.

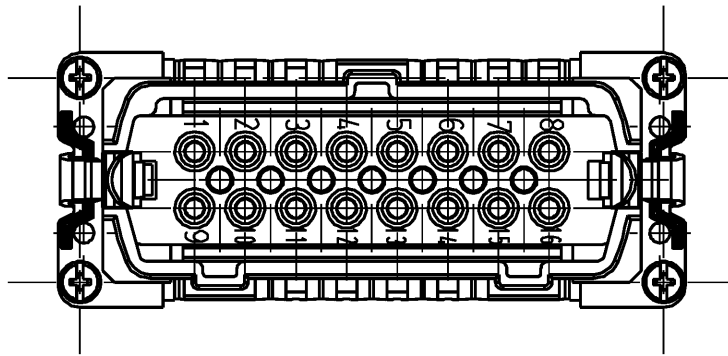


B

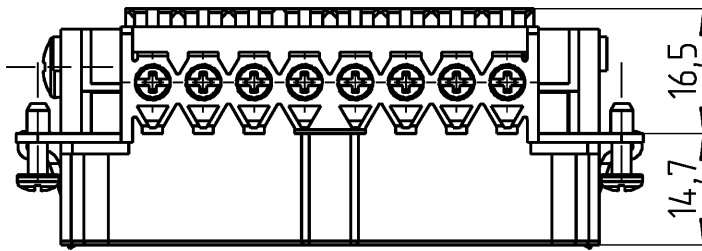

C

○ Diese Maße werden bei Abnahme besonders geprüft
 ○ Ausschließlich Prüfmaße
 ▭ Mit IE gekennzeichnete Maße sind nur für interne Zwecke gültig

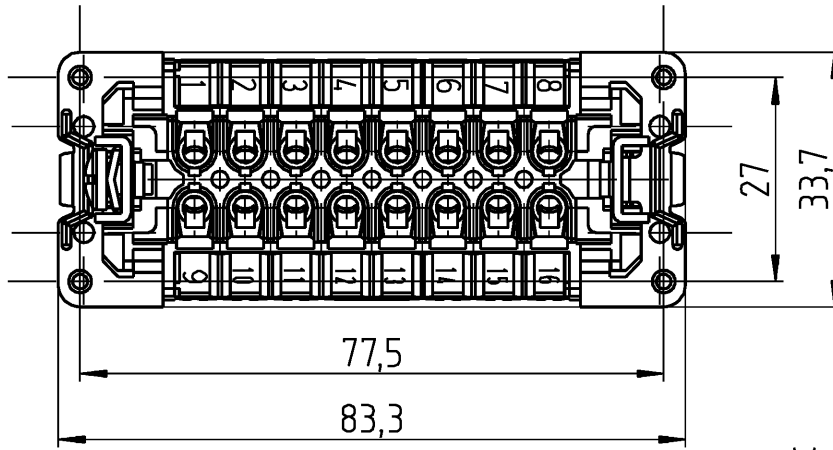

D

Weitere Daten siehe Katalog
 further Data see catalog

Tolerierung Size ISO 14405 (E) / Tolerance system Size ISO 14405 (E).
 (This ISO-standard describes the envelope principle. According to the envelope principle the deviations of form and parallelism are limited by the size tolerances).
 ja/yes Stoffverbots- und Deklarationsliste nach WN 5020.010 ist einzuhalten.
 Conformity with Wieland document WN 5020.010 e (list of prohibited / declarable hazardous substances) to be declared!

Freitoleranz nach General tolerance CAD - Zeichnung, keine manuellen Änderungen CAD - drawing, no manual modifications allowed 1. Verwendung: First Use: Blatt: 1 von 1 Sheet: of 1

| | | | | | | | | |
|---------------------|--|-------------------------------|------------------------|--|---------------------------|---|-----------------------------|-------|
| / | | | Werkstoff / Material | | Tag/Date | Name | Zeichnung Nr. / Drawing No. | Index |
| / | | | Farbe/colour: | | gezeichnet drawn | 03.02.2017 | | |
| / | | Maßstab / Scale 1:1 | kieselgrau/pebble gray | | geprüft checked | | 70.310.1640.001K | |
| / | | | | | Normgepr. Stand. check | | | |
| / | | Vol. | mm ³ | Ofl./Srf. | mm ² | Ersatz für / Replacement for: | | |
| / | | | | Type | Benennung/Title | | | |
| / | | | | wieland | | STECKEREINSATZ | | |
| Index | | Datum / Blatt Date / Sheet | | www.wieland-electric.com | | 2,5 qmm 500V 16A Schraubanschluss und Drahtschutz male insert screw connection and wire protection | | |
| Änderung / Revision | | | | | | | | |

Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts sind verboten, soweit nicht ausdrücklich gestattet. Die Reproduktion, Distribution und Utilization of this document as well as the communication of its contents to others without express authorization is prohibited.