
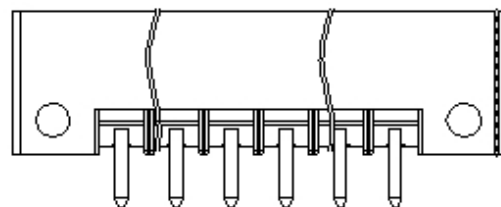

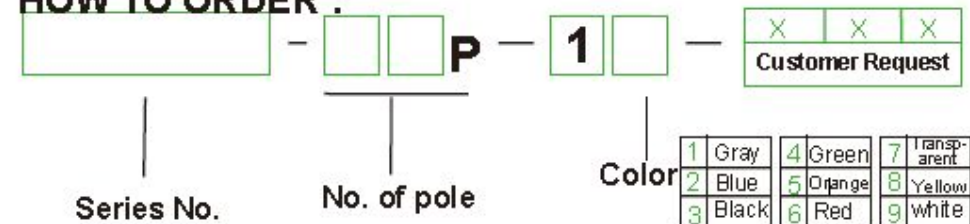



SECTION A-A



Approval		
Electrical		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	8A	8A
Rated impulse voltage	2.5KV	
Mechanical		
Ambient temperature	-40°C~+140 °C	
Dimensions		
Pitch	3.5(.138") 3.81(.150")	
Poles	2P-12P	
Material		
Housing	PA4 6,UL94 V-0	
Pin header	Copper, Tin plated	

HOW TO ORDER :



 mm (INCH)	 DEGSON ELECTRONICS CO., LTD.
 THROANGLE PROJECTION	
NAME 15EDGVM-THR-3.5,15EDGVM-THR-3.81	