
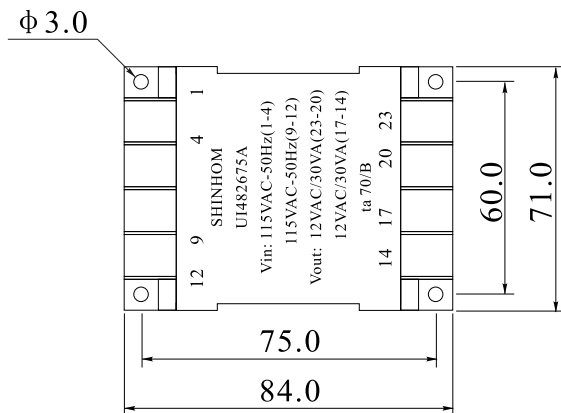
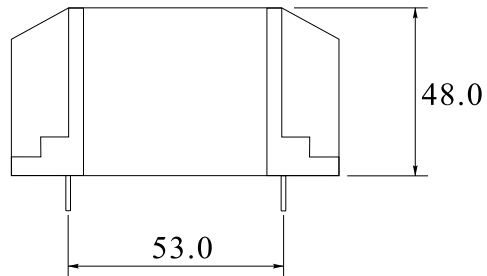


Rev.	Description	Date
A0	New release	2022.11.14

1. PHYSICAL CHARACTERISTICS (mm)

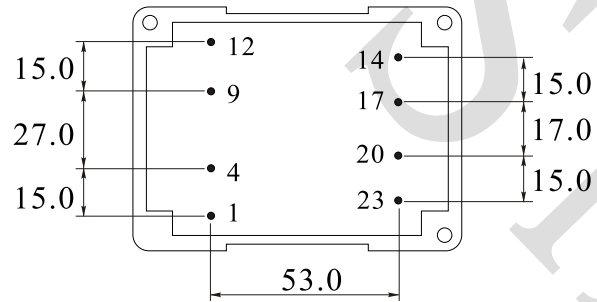


Marking

12	9	4	1
SHINHOM			
UI482675A			
Vin: 115VAC-50Hz(1-4)			
115VAC-50Hz(9-12)			
Vout: 12VAC/30VA(23-20)			
12VAC/30VA(17-14)			
ta 70/B			
14	17	20	23

NOTES:

Temp 20°C 48%RH
RoHS Compliant

2. ELECTRONICAL SCHEMATIC

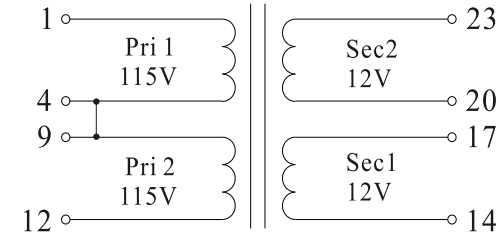

3. ELECTRONICAL SPECIFICATIONS

Pri voltage: 230V, 50Hz

Sec load voltage: 2X12.0V ± 5% @ 2.5A

No load voltage: 2X14.5V ± 5%

Output Power: 60VA

Hi-Pot: 2750V, 50Hz, 1mA, 1min Pri to Sec

Note:

- Solderability: leads shall meet MIL-STD-202, Method 208D for solderability.
- Flammability: UL94V-0
- ASTM oxygen index: >28%

NAME:	Power Transformer		
CUSTOMER P/N:	BV UI 482 0009	DATE:	2022-11-14
SHINHOM P/N:	UI482675A	REV:	A0
DRAWN BY	CHECKED BY	APPROVE BY	



SHINHOM
SHAANXISHINHOM ENTERPRISE CO LTD

The Document property belong to SHINHOM & is not allowed to be duplicated without authorization