
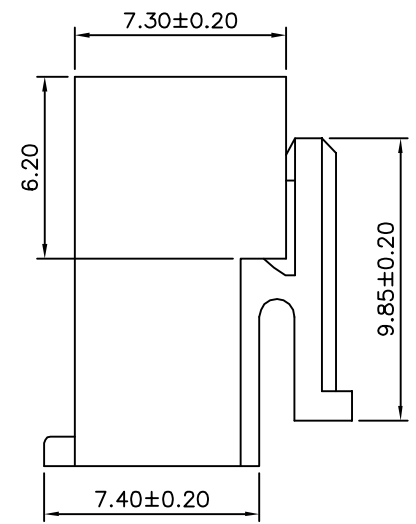
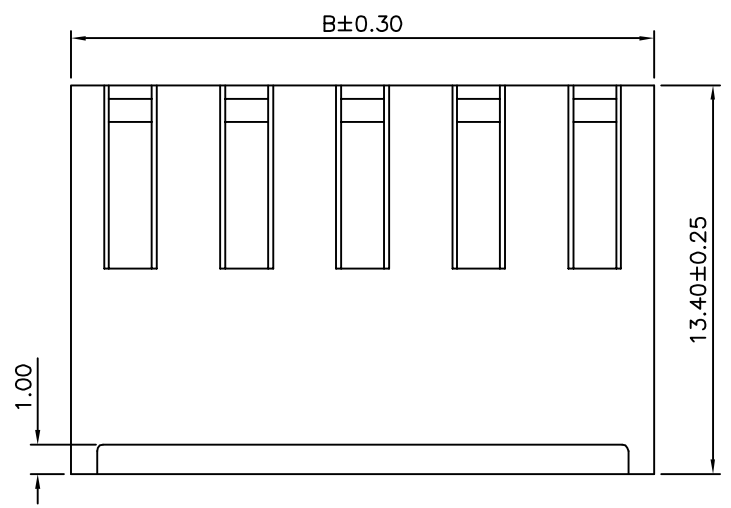


SPECIFICATION

Current Rating:7A AC/DC
 Voltage Rating:250V AC/DC
 Withstand Voltage:1500V AC/Minute
 Insulation Resistance:1000 Megaohms Min.
 Operation Range:-25°C~+105°C
 Contact Resistance:10 Milliohms Max.
 Material:PA66(UL94V-0)
 RoHS Compliant

VH XX H - H
 (1) (2) (3) (4)

- (1) VH:3.96mm VH Series
- (2) XX:No. Of Position
- (3) H:Female Housing
- (4) H:RoHS Compliant

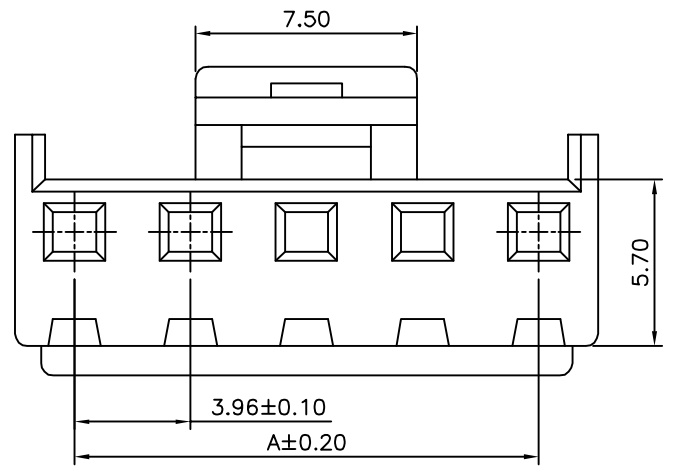

Pin	A	B
2	3.96	8.39
3	7.92	12.35
4	11.88	16.31
5	15.84	20.27
6	19.80	24.23
7	23.76	28.19
8	27.72	32.15
9	31.68	36.11
10	35.64	40.07

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.30 .X ±0.25 .XX ±0.20 .XXX ±0.15
PART No. VHXXH-H		MEI		
DRAWING No. VHXXH-H		CHECKED BY HZF		
SCALE NONE		DRAWING BY CYP		
REV.	A0	UNIT mm		

NO.	REV.	DESCRIPTION	CHK	DATE
△ A0		NEW RELEASE	HZF	02/06/2015
		REVISIONS		