






1. PHYSICAL CHARACTERISTICS (mm)

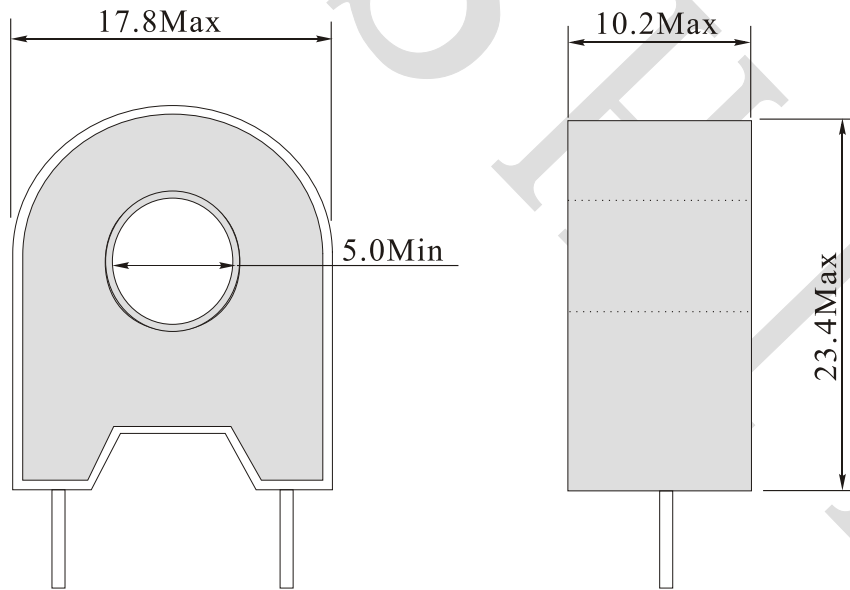

NOTES:

Temp 20°C 48%RH
RoHS Compliant

2. ELECTRONICAL SCHEMATIC

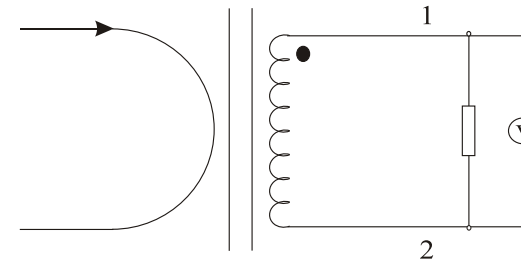

3. ELECTRONICAL SPECIFICATIONS

Turns ratio: 500:1

Pri current: 30mA

Inductance: 700mH Min@10KHz,0.01V

Hi-Pot: Pri to Sec AC1.5KV 1mA 1Min

RDC: 25 Ω Max@T=20°C

Note:

1. Solderability: leads shall meet MIL-STD-202,

Method 208D for solderability.

2. Flammability: UL94V-0

3. ASTM oxygen index: >28%

Test Instrument: WK3260B+3261A

NAME:	Current transformer		
CUSTOMER P/N:	AS-104	DATE:	2022-10-11
SHINHOM P/N:	ACST-009	REV: A0	PAGE
DRAWN BY	CHECKED BY	APPROVE BY	



SHINHOM
SHAANXISHINHOM ENTERPRISE CO LTD

The Document property belong to SHINHOM & is not allowed to be duplicated without authorization