

PHILIPS

Xitanium

LED driver



Datasheet

Xitanium non-iso DALI dimmable & programmable (TD21 LEDset)

Xitanium 90W 0.25-0.7A 220V TD21 230V

9290 016 94706

Xitanium non-isolated DALI drivers are ideal for High Voltage (HV) linear systems and stand on three pillars: quality of light, reliability and flexibility.

By using Xitanium LED drivers in your luminaires, you can be sure to offer your customers high quality of light without visual flicker and stroboscopic effects. The reliability of our drivers is based on in-depth electronics knowledge and extensive testing.

Finally, application-oriented operating windows offer the flexibility required to provide the stable lumen output and light quality levels that lighting specifiers and architects demand.

Benefits

- High quality of light
- High reliability
- Future-proof flexibility
- Flicker and noise free dimming due to amplitude modulation dimming (AM)

Features

- Configurable operating windows (AOC) via DALI interface or with LEDset
- Adjustable Light Output (ALO)
- Constant Light Output (CLO)
- Corridor Mode (CM)
- Dimming supported during DC operation (DCemDim)
- Touch & Dim (TD)
- OEM Write Protection (OWP)
- Memory Bank 1 Extension / Luminaire Data (DALI part 251)

Application

- Offices
- Healthcare
- Education
- Indoor parking areas
- Retail: supermarkets, shopping malls

Electrical input data

| Specification item | Value | Unit | Condition |
|------------------------------|-----------|-----------------|--------------------------------------------------------------------|
| Rated input voltage range | 220...240 | V _{ac} | Nominal range |
| Rated input voltage | 230 | V _{ac} | |
| Rated input frequency range | 50...60 | Hz | Nominal range |
| Rated input current | 0.44 | A | @ max output power @ rated input voltage |
| Rated input power | 97 | W | @ max output power @ rated input voltage |
| Power factor | 0.99 | | @ max output power @ rated input voltage |
| Total harmonic distortion | 5 | % | @ max output power @ rated input voltage |
| Efficiency | 94 | % | @ max output power @ rated input voltage @ U _{out} = 220V |
| Rated input voltage DC range | 186...250 | V _{dc} | Nominal range |
| Rated input current DC range | 0.52 | A _{dc} | Nominal range |
| Input voltage AC range | 198...264 | V _{ac} | Operational range |
| Input frequency AC range | 47.5...63 | Hz | Operational range |
| Input voltage DC range | 168...275 | V _{dc} | Operational range |
| Standby Power | 0.34 | W | |
| Isolation input to output | No | | |

Electrical output data


| Specification item | Value | Unit | Condition |
|--------------------------------------|------------------|-----------------|--------------------------------------|
| Regulation method | Constant Current | | |
| Output voltage | 50...220 | V _{dc} | |
| Output voltage max. | 250 | V | Maximum output voltage (rms) |
| Output current | 0.25...0.7 | A | |
| Output current min dimming | 4 | mA | |
| Output current tolerance ± | 5 | % | |
| Output current ripple LF | ≤ 4 | % | Ripple = peak / average. Up to 2kHz. |
| Output P _{st} ^{LM} | ≤ 1 | | |
| Output SVM | ≤ 0.4 | | |
| Output power | 25...90 | W | |

Electrical data controls input

| Specification item | Value | Unit | Condition |
|------------------------------------|---------------------------------------|------|-------------------------------------------------------------------------------|
| Control method | Corridor Mode, DALI, Touch & Dim (TD) | | DALI parts: 101, 102, 207, 251 |
| Dimming range | 1...100 | % | With AOC > 250mA 1% dimming possible; AOC < 250mA min. physical current = 4mA |
| Isolation controls input to output | Basic | | acc. IEC61347-1 |

Wiring and Connections

| Specification item | Value | Unit | Type |
|---------------------------|---------------------|-----------------------|------------------------------------------------------------------------------------------------------------------------|
| Input wire cross-section | 0.5...1.5 / 20...16 | mm ² / AWG | WAGO744, solid wire |
| Input wire strip length | 8...9 | mm | |
| Output wire cross-section | 0.5...1.5 / 20...16 | mm ² / AWG | WAGO744, solid wire |
| Output wire strip length | 8...9 | mm | |
| Maximum cable length | 2 | m | Total length of wiring including LED module, one way. For longer wiring please double check EMI behavior of luminaire. |

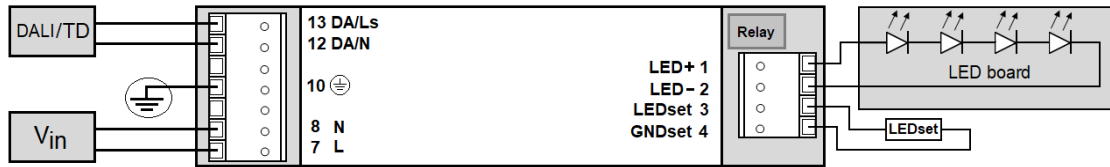


Insulation

| Insulation per IEC61347-1 | Input | Output+LEDset | DALI | Housing |
|---------------------------|-------|---------------|-------|---------|
| Input | | Non | Basic | Basic |
| Output+LEDset | Non | | Basic | Basic |
| DALI | Basic | Basic | | Basic |
| Housing | Basic | Basic | Basic | |

Dimensions and weight

| Specification item | Value | Unit | Tolerance (mm) |
|-----------------------------|-------|------|----------------|
| Length (A1) | 280 | mm | |
| Mounting hole distance (A2) | 270 | mm | |
| Width (B1) | 30 | mm | |
| Height (C1) | 21 | mm | |
| Mounting hole diameter (D1) | 4.1 | mm | |
| Weight | 180 | gram | |

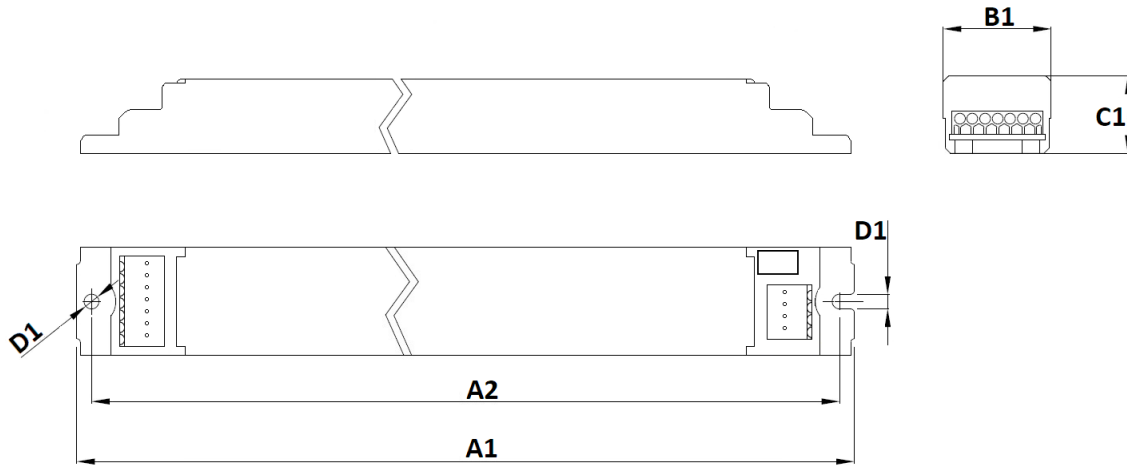

Logistical data


| Specification item | Value |
|--------------------|---------------------------------------|
| Product name | Xitanium 90W 0.25-0.7A 220V TD21 230V |
| EOC | 871951427854700 |
| Logistic code 12NC | 9290 016 94706 |
| EAN1 (GTIN) | 8719514278547 |
| EAN3 (box) | 8719514278554 |
| Pieces per box | 24 |

Operational temperatures and humidity

| Specification item | Value | Unit | Condition |
|-----------------------------|-----------|------|-------------------------------------------------------------------------|
| Ambient temperature | -25...+50 | °C | Higher ambient temperature allowed as long as Tcase-max is not exceeded |
| Tcase-max | 75 | °C | lifetime 50khrs; |
| Tcase-life | 65 | °C | lifetime 100khrs; measured at T _c -point |
| Maximum housing temperature | 110 | °C | In case of a failure, inherent by design |
| Relative humidity | 10...90 | % | Non-condensing |

Lifetime

| Specification item | Value | Unit | Condition |
|------------------------|-----------|----------|---------------------------------------------------------------------------|
| Driver lifetime | 100,000 | hours | Measured temperature at Tcase-point is Tcase-life. Maximum failures = 10% |
| Mains switching cycles | > 100,000 | switches | See Design-in guide for detailed explanation |

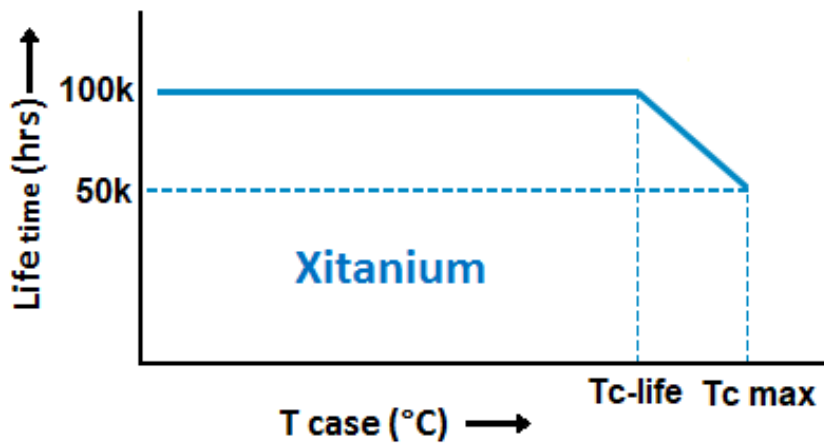

Storage temperature and humidity

| Specification item | Value | Unit | Condition |
|---------------------|-----------|------|----------------|
| Ambient temperature | -25...+85 | °C | |
| Relative humidity | 5...95 | % | Non-condensing |

Programmable features


| Specification item | Available | Default setting | Condition |
|----------------------------------------|----------------------|-----------------|---------------------------------------------------------------------------------------------------------------------------|
| Set Adjustable Output Current (AOC) | LEDset, Programmable | 250 mA | If the output current is set via LEDset, do not leave open / short-circuit. See Design-In Guide for resistor value table. |
| NTC on LEDset | Yes | | |
| Adjustable Light Output (ALO) | Yes | OFF | |
| Constant Light Output (CLO) | Yes | OFF | |
| Touch & Dim (TD) | Yes | ON | |
| Corridor Mode | Yes | OFF | Default: T1=55s, T2=12s, T3=30min |
| Min Dim Level | Yes | 1 % | |
| DC emergency (DCemDim) | Yes | ON | Default 15%, EOFx range = 1 .. 100% (EOFx = DCemDIM level) |
| DALI control supported at DC operation | Yes | OFF | |
| OEM Write Protection (OWP) | Yes | OFF | |
| Luminaire Info (DALI part 251) | Yes | — | |

Features

| Specification item | Value | Condition |
|---------------------------------------------|-------|----------------------|
| Open load protection | Yes | Automatic recovering |
| Short circuit protection | Yes | Automatic recovering |
| Over power protection | Yes | Automatic recovering |
| Hot wiring | No | |
| Suitable for fixtures with protection class | I | per IEC60598 |
| Output Overvoltage Detection | Yes | |
| Energy metering (DALI part 252) | No | |
| Diagnostics | No | |

Inrush current

| Specification item | Value | Unit | Condition |
|----------------------------|-----------|---------|------------------------------------------------|
| Inrush current I_{peak} | 25 | A | Input voltage 230V |
| Inrush current T_{width} | 230 | μ s | Input voltage 230V, measured at 50% I_{peak} |
| Drivers / MCB 16A type B | ≤ 20 | pcs | Indicative value |

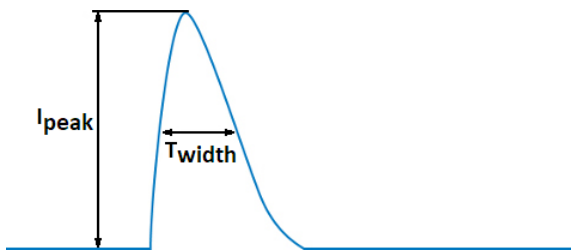

| MCB | Rating | Relative number of LED drivers |
|-----|--------|--------------------------------|
| B | 4A | 25% |
| B | 6A | 40% |
| B | 10A | 63% |
| B | 13A | 81% |
| B | 16A | 100% (stated in datasheet) |
| B | 20A | 125% |
| B | 25A | 156% |
| B | 32A | 200% |
| B | 40A | 250% |
| C | 4A | 42% |
| C | 6A | 63% |
| C | 10A | 104% |
| C | 13A | 135% |
| C | 16A | 170% |
| C | 20A | 208% |
| C | 25A | 260% |
| C | 32A | 340% |
| C | 40A | 415% |

Driver touch current / protective conductor current

| Specification item | Value | Unit | Condition |
|-----------------------------------------------------|-------|--------|-------------------------------------------------------|
| Typical Protective Conductor Current (ins. Class I) | 0.5 | mA rms | Acc. IEC60598-1. LED module contribution not included |

Surge immunity


| Specification item | Value | Unit | Condition |
|-------------------------------------|-------|------|---------------------------------------------|
| Mains surge immunity (diff. mode) | 1 | kV | Acc. IEC61000-4-5. 2 Ohm, 1.2/50us, 8/20us |
| Mains surge immunity (comm. mode) | 2 | kV | Acc. IEC61000-4-5. 12 Ohm, 1.2/50us, 8/20us |
| Control surge immunity (diff. mode) | 1 | kV | Acc. IEC61000-4-5. 2 Ohm, 1.2/50us, 8/20us |
| Control surge immunity (comm. mode) | 2 | kV | Acc. IEC61000-4-5. 12 Ohm, 1.2/50us, 8/20us |

Application Info


| Specification item | Value |
|----------------------------------------|------------------------------------------------|
| Approval marks | CCC / CE / DALI 2 / EAC / EL / ENEC / RCM / UA |
| Ingress Protection classification (IP) | 20 |
| Noise and hum dB(A) | 20 |
| Application | Indoor Linear |
| Mounting Type | Built-in |

Graphs


Operating window

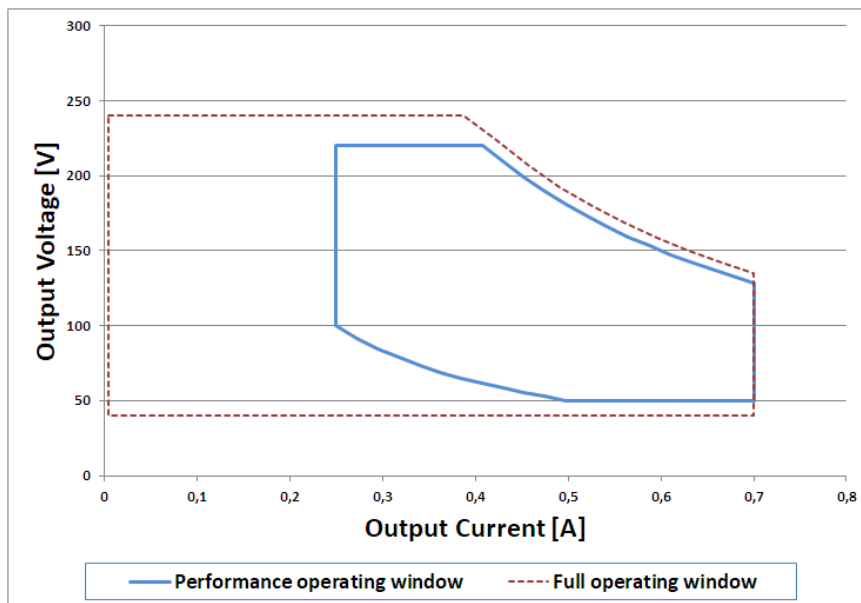


Power factor versus output power

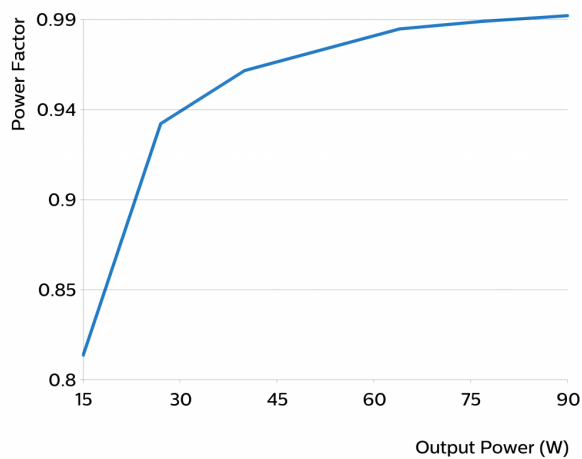

Efficiency versus output power

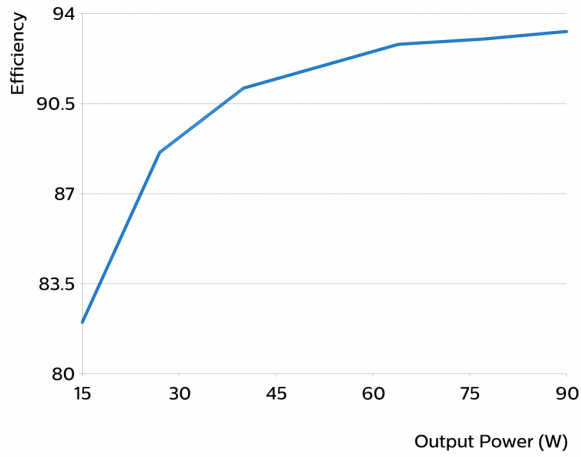

THD versus output power

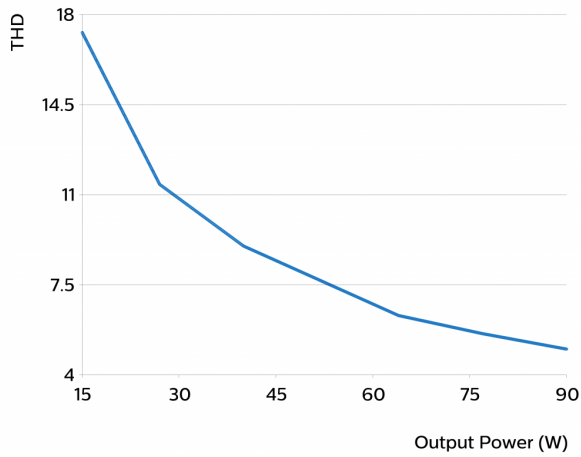

Notes

Caution: It is not safe to touch the PCB (tracks) around the relay when the driver is powered on.



©2021 Signify Holding, IBRS 10461, 5600 VB, NL. All rights reserved.
UK importer address: Signify Commercial UK Limited, 3, Guildford Business Park, GU2 8XG.

The information provided herein is subject to change without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify.

Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V. All other trademarks are owned by Signify Holding or their respective owners.

Date of release: April 15, 2021 v2

www.philips.com/oem