

### SPECIFICATION

Current Rate: 3 AMP  
Insulation Resistance: 1000M  $\Omega$  Min.  
Contact Resistance: 20m  $\Omega$  Max.  
Dielectric Voltage: 1000V AC for one minute  
Operation Temperature: -40°C to +105°C








### MATERIAL

Insulator: Polyester, UL 94V-0  
Standard: PBT or Nylon 6T  
Contact Pin: Copper Alloy  
Contact Plating: Gold Flash all over

Standart height (H) = 2.54

## PLS-xxR, PLS-xxR2, PLS-xxR3

Pin Header 2.54mm 1 Row H=1.5/1.7/2.54mm Right Angle Type

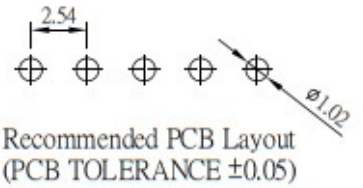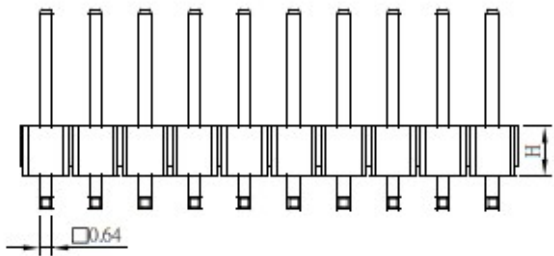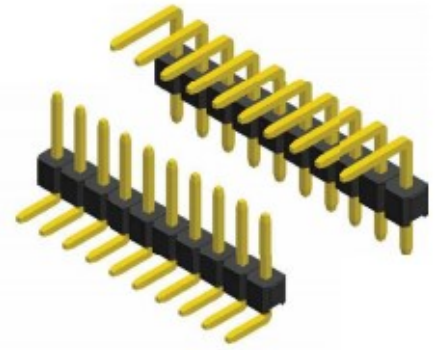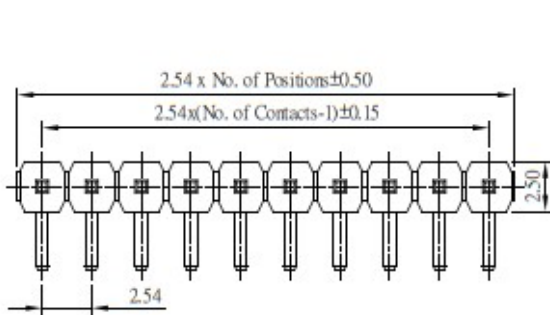

## PLD-xxR, PLD-xxR2

Pin Header 2.54mm 2 Row H=1.5/1.7/2.54mm Straight Type

