


Data sheet

Commercial Art.No.: 56.735.0053.6

Feed-through terminal WKF 35/35 BLAU

Feed-through terminal with tension spring connection for mounting on TS35, nominal cross section: 35 mm², width: 16 mm, color: blue

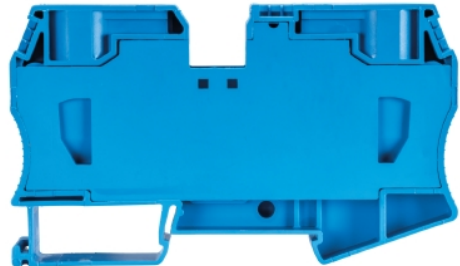

Commercial Art.No.	56.735.0053.6
EAN	4015573732223
Order Unit	10

Certificates / Approvals



ATEX

Technical data

General

Nominal cross section	35 mm ²
Color	Blue
Number of levels	1
Number of clamp positions per level	2
Width/grid dimension	16 mm
Insulating housing	PA666
Inflammability class of insulation material acc. with UL94	V0
Explosion-tested version "Ex e"	yes
Mounting method	DIN rail (top hat rail) 35/7.5 mm
Terminal blocks for electrical installations	No

Technical data

Rated current	125 A
Rated voltage	800 V
Rated impulse voltage	8 kV
Pollution degree	3
Closing plate required	No
Type of insulation material	Thermoplastic
Length	99.9 mm

Connection Data

Connection type 1	spring clamp connection
Connection type 2	spring clamp connection
Minimum cross section solid	2.5 mm ²
Maximum cross section solid	10 mm ²
Minimum cross section fine stranded	2.5 mm ²
Maximum cross section fine stranded	35 mm ²
Minimum cross section stranded	16 mm ²

Maximum cross section stranded	35 mm ²
Wire strip length	25 mm

Technical Data UL/CSA

Cross section UL	12-2 AWG
Voltage UL	600 V
Current factory wiring	120 A
Current field wiring	120 A
Cross section CSA	12-2 AWG
Voltage CSA	600 V
Current CSA	120 A

Classification

ECLASS 11	
ECLASS 8.1	27141120
ETIM 7.0	EC000897
ETIM 6.0	EC000897
ETIM 5.0	EC000897
ETIM 4.0	EC000897
ETIM 3.0	EC000897

Product compliance


ROHS conformity status	Compliant
REACH-SVHC conformity status	Compliant

Accessories

Commercial Art.No.:	Article-type description:	Description:
Z7.285.6227.0	Jumper bar IVB WKF 35-2	Cross connector, insulated for DIN rail terminal blocks type WKF..., 2 - pole
98.300.0000.0	Mounting rail TS 35x7,5 UNPERF - l:2000mm	Mounting rail TS 35, unslotted, size 7,5 mm, length 2 m, material steel. galv. zinc-plated and dichromated
98.300.1000.0	Mounting rail TS 35x7,5 PERF 15mm - l:2000mm	Mounting rail TS 35, slotted, size 7,5 mm, length 2 m, material steel. galv. zinc-plated and dichromated
98.300.1900.0	Mounting rail TS 35x7,5 PERF 25mm - l:2000mm	Mounting rail TS 35, slotted, size 7,5 mm, length 2 m, material steel. galv. zinc-plated and dichromated
98.360.0000.0	Mounting rail TS 35x15-2,3 UNPERF - l:2000mm	Mounting rail TS 35, unslotted, size 15 mm, length 2 m, material steel. galv. zinc-plated and dichromated
98.360.0004.0	Mounting rail TS 35x15-2,3 UNPERF FZN - l:2000mm	Mounting rail TS 35, unslotted, size 15 mm, length 2 m, material steel, hot galvanized
98.370.0000.0	Mounting rail TS 35x15 UNPERF - l:2000mm	Mounting rail TS 35, unslotted, size 15 mm, length 2 m, material steel. galv. zinc-plated and dichromated
98.370.1000.0	Mounting rail TS 35x15 PERF 15mm - l:2000mm	Mounting rail TS 35, slotted, size 15 mm, length 2 m, material steel. galv. zinc-plated and dichromated
98.380.0000.0	Mounting rail TS 35x15-2,3 UNPERF CU - l:2000mm	Mounting rail TS 35, unslotted, size 15 mm, length 2 m, material E copper
04.343.9253.8	Warning cover ADF 35/5	Cover with warning symbol for DIN rail terminal blocks type WKF ...
98.300.1800.0	Mounting rail TS 35x7,5 PERF 18mm - l:2000mm	Mounting rail TS 35, slotted, size 7,5 mm, length 2 m, material steel. galv. zinc-plated and dichromated


04.242.8053.0	Marking tag strips 9705 A / 8 / 10	Marking tag strips for DIN rail terminal blocks type 9700 A / 8..., 10 tags per strip, color: blue, unmarked, markable with Wieplot plotter-system
---------------	------------------------------------	--

○ Diese Maße werden bei Abnahme besonders geprüft
 □ Ausschließlich Prüfmaße
 ○ MTL/Æ: Rekanzeichnete Maße sind nur für interne Zwecke gültig

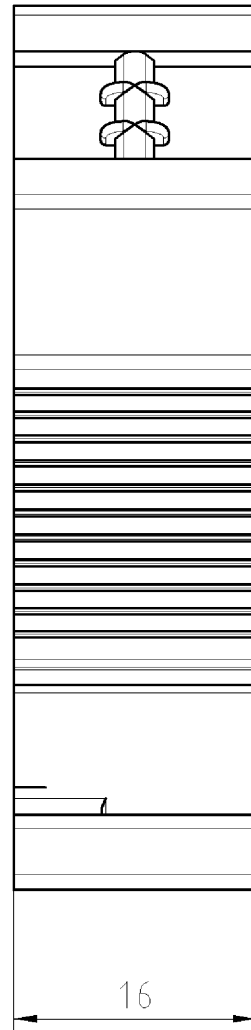

Technische Daten
 Technical Data

	VDE	UL	CSA
Bemessungsspannung V rated voltage	800	600	600
Bemessungsstrom A rated current	125	115	115
Anschlußbereich max. mm ² /AWG connection range	35	2	2
Bemessungsquerschnitt 35mm ² rated cross-section 35mm ²			
Brennbarkeitsklasse UL 94 V-0 flamability rating UL 94 V-0			
Verschmutzungsgrad 3/Überspannungskategorie III pollution degree 3/overvoltage category III			

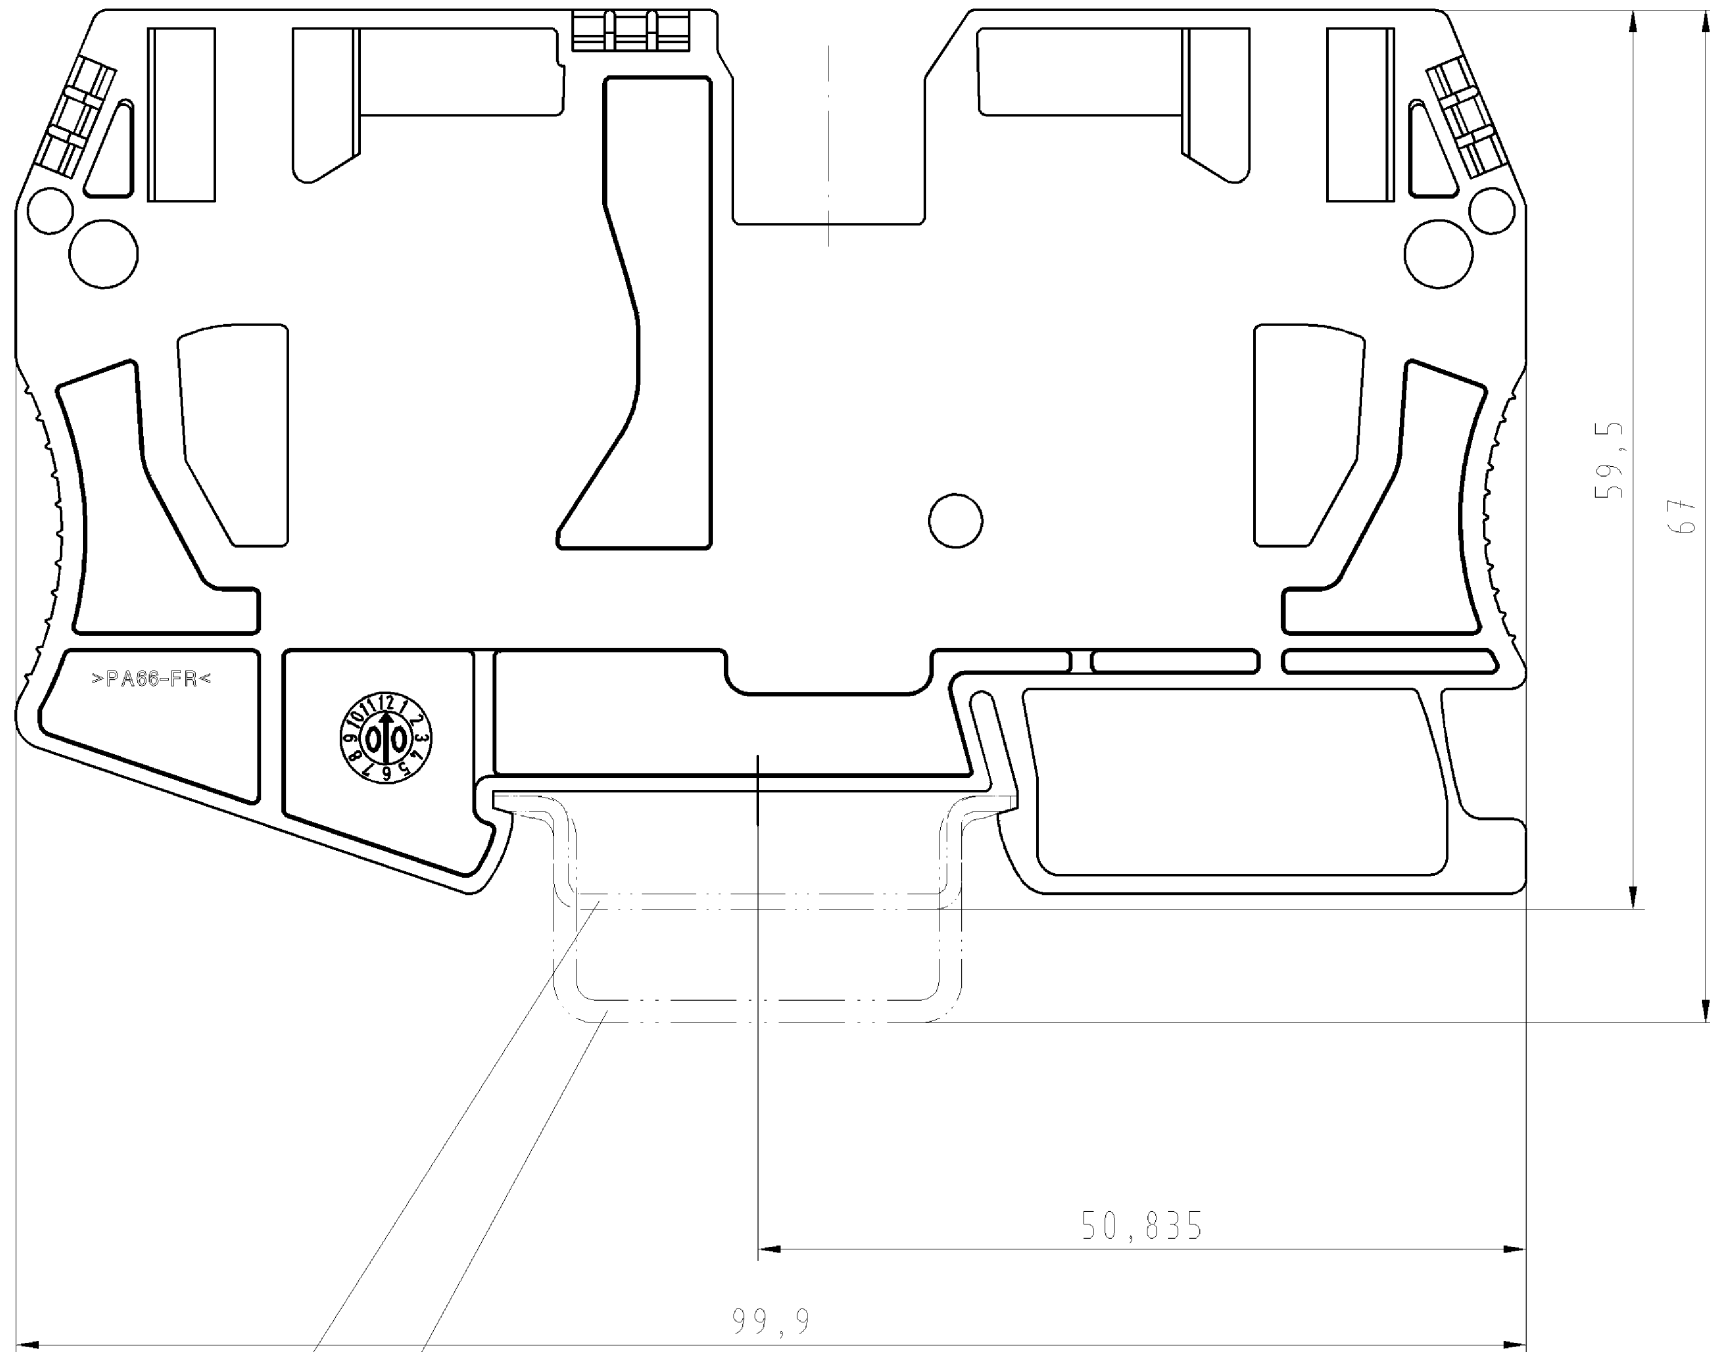

Tragschiene EN 60715 - 35 x 15
 mounting rail EN 60715 - 35 x 15

Tragschiene EN 60715 - 35 x 7.5
 mounting rail EN 60715 - 35 x 7.5

weitere Informationen, siehe Katalog
 additional data are available from the catalogue

Teile-Nr. / part number	Typ / type	Farbe / colour
56.735.0053.0	WKF 35/35	kieselgrau, ähnl. RAL7032 / silicic gray, similar RAL 7032
56.735.0053.6	WKF 35/35 blau	lichtblau, ähnl. RAL 5012 / light blue, similar RAL5012

Freitoleranz nach DIN		CAD - Zeichnung, keine manuellen Änderungen			1. Verwendung: -		Bl.: 1 von 1	
	Maßstab	Werkstoff / material	2004	Tag	Name	Zeichnung Nr.		Index
	2:1	PA 6.6	Entworfen	26.Feb.	Postler F.	T 56.735.0053.0 01K		
			Geprüft	-	-	Ersatz für: -		
			Normgepr.	-	-			
Buchstabe Datum / Blatt		Änderung		Benennung		DURCHGANGSKLEMME		
						through terminal Federkraftanschluss / spring clamp connection		

Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts sind verboten, soweit nicht ausdrücklich gestattet.
 The reproduction, distribution and utilization of this document as well as the communication of its contents to others without express authorization is prohibited.

567350053001K_4_CADW100_Postler 2004-02-27T08:57:49 1.000