
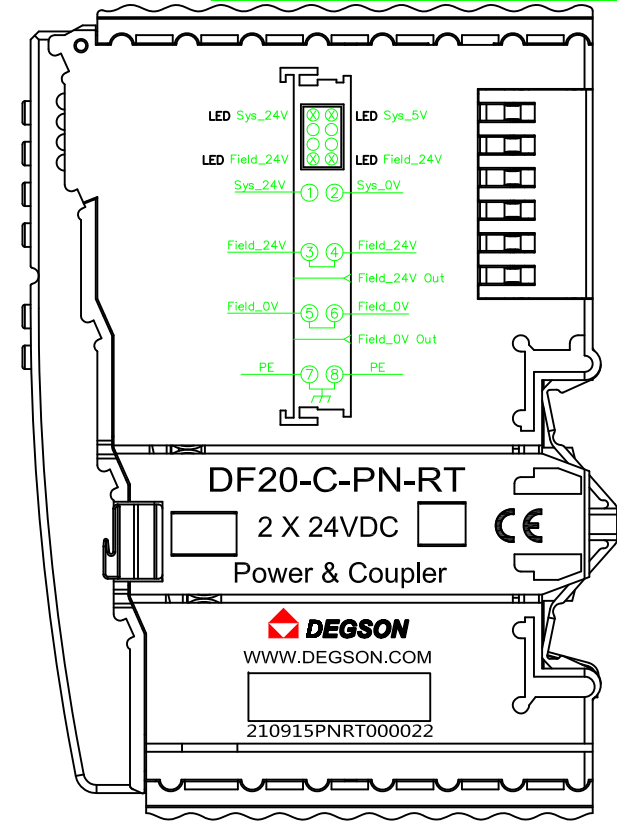
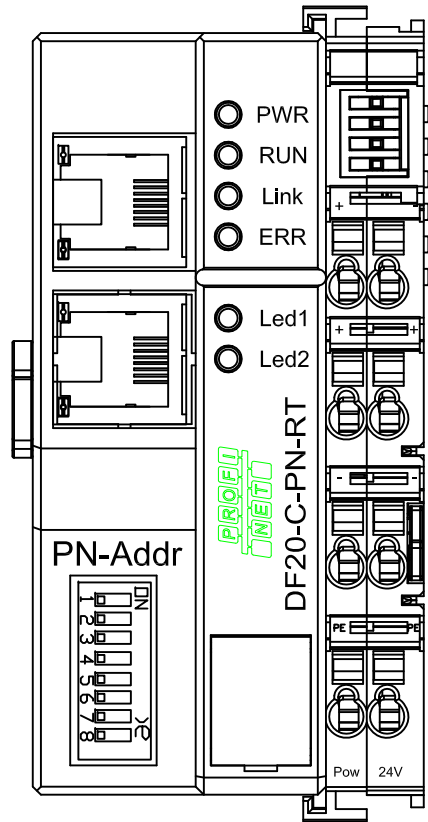


总线协议:	ProfINET	适配IO模块数量:	32
从站数量:	根据主站设定	从站错误诊断:	支持
数据传输介质:	五类双绞线	隔离耐压:	500V
传输距离:	100mm (站站距离)	振动测试/冲击测试:	符合EN60068-2-6/-2-27 标准
总线速率:	100Mbps	电磁兼容测试:	符合EN61000-4标准
总线接口:	2*RJ45	工作温度:	-25~+60℃
系统电源 (电源输入/电源输出):	<24VDC(18-36V)>/<5V DC/0.6A>	相对湿度:	95%, 无冷凝
公共端电源:	24V DC(±20%)/5A	尺寸规格:	100mm*48mm*69mm


尺寸公差(mm)

0	>30	>60	>100	>150	0.05/10
~	~	~	~	~	±T
±0.20	±0.30	±0.50	±0.70	±1.00	

印字为激光打标, 印字内容清晰、无断线等/Printing for laser marking,printing content is clear ,no broken line,ect

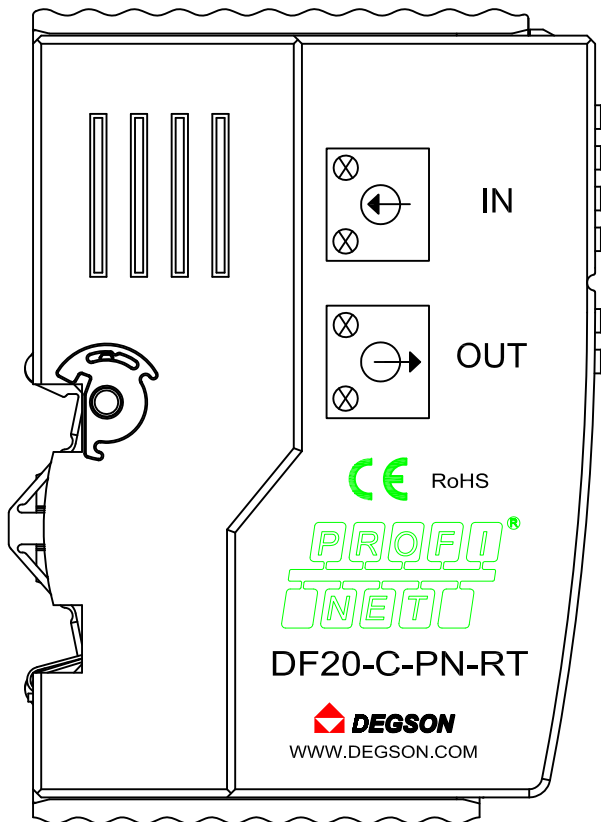

条形码备注及示例:

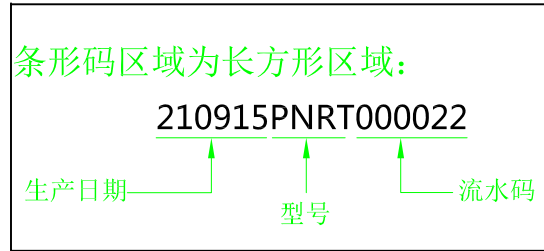

MATERIAL:	/	SURFACE:	/
MAT.NO.:	3005000270	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
STATUS:	/	Description:	
APPD:		DF20-C-PN-RT	
CHKD:		DRAWING NO.:	200015621
DRFT:	luo DP 2021.08.31	REV	01
SIZE:	A4	TYPE:	PRODUCT DRAWING
SCALE:	1:1	SHEET	1/1

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility, model or designs registrations. 除非给予明确授权, 否则禁止转让、复制、利用、或在本文档内容内任何图形或文字进行复制或传播。 未经授权使用或传播, 将导致侵权及法律责任。 在使用前请仔细阅读并保留所有权利。