

### SCHOTTKY BARRIER RECTIFIERS


VOLTAGE RANGE: 20 --- 100 V  
CURRENT: 3.0 A

#### FEATURES

- ◇ Metal-Semiconductor junction with guard ring
- ◇ Epitaxial construction
- ◇ Low forward voltage drop, low switching losses
- ◇ High surge capability
- ◇ For use in low voltage, high frequency inverters free wheeling, and polarity protection applications
- ◇ The plastic material carries U/L recognition 94V-0

#### MECHANICAL DATA

- ◇ Case: JEDEC DO--27, molded plastic
- ◇ Terminals: Axial lead, solderable per MIL-STD-750, Method 2026
- ◇ Polarity: Color band denotes cathode
- ◇ Weight: 0.041 ounces, 1.15 grams
- ◇ Mounting position: Any

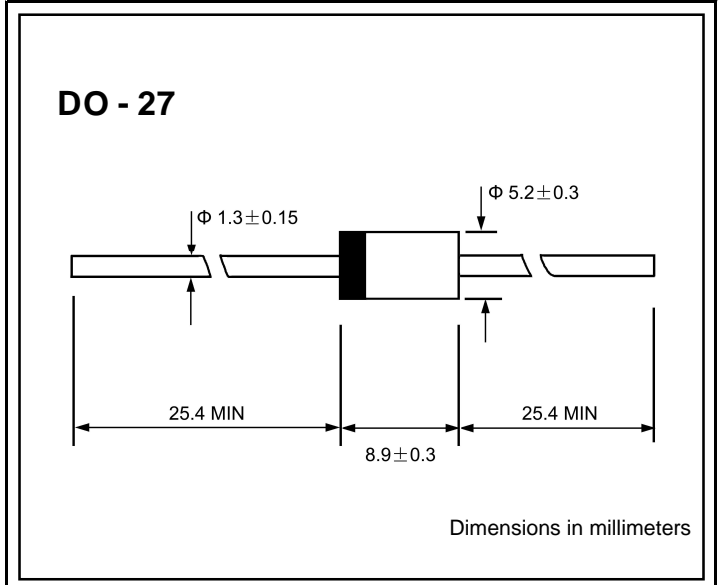

#### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate by 20%.

		SR320	SR330	SR340	SR350	SR360	SR380	SR3A0	UNITS
Maximum recurrent peak reverse voltage	$V_{RRM}$	20	30	40	50	60	80	100	V
Maximum RMS voltage	$V_{RMS}$	14	21	28	35	42	56	70	V
Maximum DC blocking voltage	$V_{DC}$	20	30	40	50	60	80	100	V
Maximum average forward rectified current 9.5mm lead length	$I_{F(AV)}$	3.0							A
Peak forward surge current 8.3ms single half-sine-wave superimposed on rated load @ $T_J=125^\circ\text{C}$	$I_{FSM}$	80.0							A
Maximum instantaneous forward voltage @ 3.0A (Note 1)	$V_F$	0.55			0.7		0.85		V
Maximum reverse current @ $T_A=25^\circ\text{C}$ at rated DC blocking voltage @ $T_A=100^\circ\text{C}$	$I_R$	20.0			10.0				mA
Typical junction capacitance (Note2)	$C_J$	250			160				pF
Typical thermal resistance (Note3)	$R_{\theta JA}$	40							°C/W
Operating junction temperature range	$T_J$	- 55 ---- + 125			- 55 ---- + 150				°C
Storage temperature range	$T_{STG}$	- 55 ---- + 150							°C


NOTE: 1. Pulse test: 300us pulse width, 1% duty cycle.

2. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.


3. Thermal resistance junction to ambient

www.galaxycn.com


**FIG.1 -- FORWARD CURRENT DERATING CURVE**

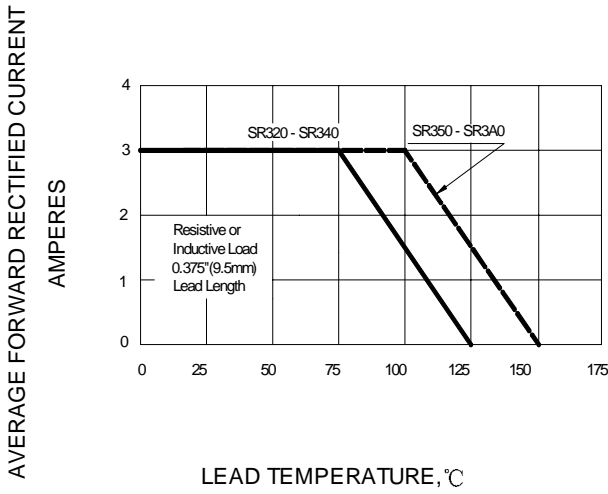

**FIG.2 -- PEAK FORWARD SURGE CURRENT**

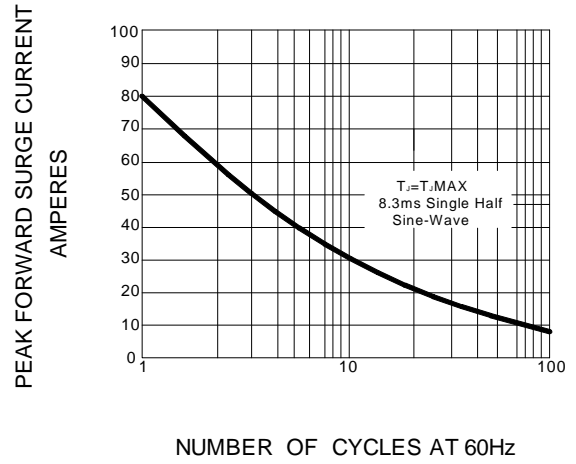

**FIG.3 -- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS**

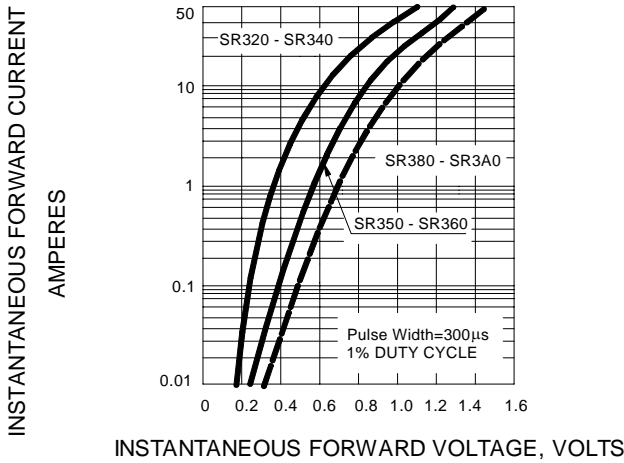

**FIG.4 -- TYPICAL JUNCTION CAPACITANCE**

